

## RF Smart Light Switch | Double

### General information

Operate one or multiple lights or devices with this wall switch Nedis® remote control.

You can register multiple receivers per channel to switch multiple lights or devices on and off with the push of a button

Easy to install

Mount the light switch directly on the wall thanks to its flat back

Channels

This wall switch remote has two separately operating transmission channels.

Nedis® RF smart receivers store up to 5 transmission codes, so that solutions can be created quickly and easily for every conceivable situation.

Compatibility and dimmable RF receivers


Supports all on/off and dimmable receivers and works with almost all existing 433.92 MHz systems, regardless of brand.

### Features

- Easy installation
- Controls multiple lights/devices with one button
- Long battery life (battery included)
- Transmission range up to 30 metres
- Compatible with most existing 433.92 MHz systems regardless of brand

### Specifications

Colour:	White
Number of outputs:	2
Number of inputs:	2
Width:	80 mm
IP rating:	IP20
Wireless technology:	433 MHz
Height:	80 mm
Signal range:	30 m
Programming functions:	Switch On / Switch Off / Dimmable
Batteries included:	1x A27/8LR732

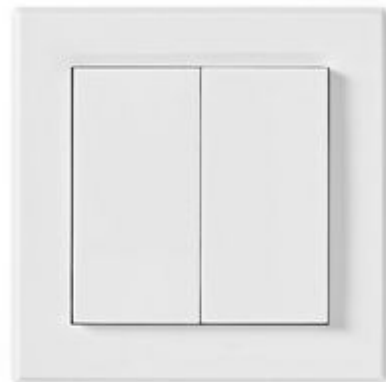

### Sales information

Order code:	<b>RFWS20WT</b>
Product description:	RF Smart Light Switch   Double
Packaging:	Giftbox with eurolock
Brand name:	Nedis



Quantity	LxWxH (mm)			Weight
<b>1</b>	60 mm	130 mm	110 mm	120 g
<b>40</b>	270 mm	370 mm	450 mm	5440 g

Material:	ABS+
Type:	Switch
App available for:	No App
Frequency:	433.92 MHz
RF Protocol:	(EV)1527
External depth (D):	14 mm
Dimensions (Calculated):	80 mm (L) x 80 mm (W) x 80 mm (H)
Mounting:	Surface Mount

## RF Smart Light Switch | Double

### Package contents

Smart switch  
23A alkaline battery  
Quick start guide