


# LA7550



3067

Monolithic Linear IC

## IF Signal Processing (VIF+SIF) Circuit for TV/VTR

©2654

The LA7550 is a full sync detection method VIF+SIF monolithic linear IC using a PLL. It has excellent 920kHz beat and buzz beat characteristics, making it ideal for audio multiplexing and high-quality AV equipment.

### Functions

- . VIF Section
  - . VIF amp
  - . AFT
- . SIF Section
  - . SIF limiter amp
- . Audio Section
  - . DC attenuator
- . Muting
  - . Audio muting (pin 2)
  - . AFT defeat (pin 14)
- . Video sync detection
- . VCO
- . FM quadrature detection
- . AF driver
- . Audio-Video simultaneous muting (pins 10, 13)

- . IF AGC
- . APC DET
- . B/W NC
- . Lock DET
- . RF AGC


### Features

- . 24-pin DIP shrink package being the smallest one for PLL ICs
- . Excellent 920kHz beat characteristics
- . Excellent buzz beat characteristics
- . High-gain VIF amp
- . High-speed AGC possible


### Maximum Ratings at Ta=25°C

			unit
Maximum Supply Voltage	V <sub>CC</sub> max	13.8	V
Allowable Power Dissipation	P <sub>d</sub> max	1200	mW
Operating Temperature	T <sub>op</sub>	-20 to +70	°C
Storage Temperature	T <sub>stg</sub>	-55 to +150	°C
Circuit Voltage	V <sub>12</sub> , V <sub>13</sub>	V <sub>CC</sub>	V
	V <sub>16</sub>	V <sub>CC</sub>	V
	V <sub>22</sub>	V <sub>CC</sub>	V
	V <sub>23</sub>	V <sub>CC</sub>	V

Continued on next page.

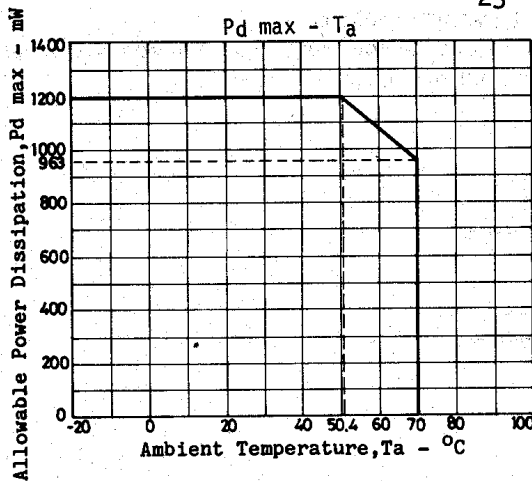

### Case Outline 3067-D24SIC (unit:mm)

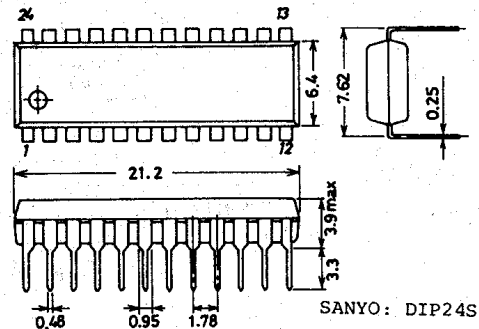

9187TA, TS No.2654-1/10

Continued from preceding page.

Circuit Current	$I_5$	-3	mA	unit
	$I_{21}$	-5	mA	
	$I_{22}$	2	mA	

Note: Assumes that the current to the IC is positive (no sign) and current from the IC is negative.

**Operating Conditions at Ta=25°C**

Recommended Supply Voltage	$V_{CC}$	12	V	unit
Operating Voltage Range	$V_{CC}$ op	10 to 13.2	V	

**Operating Characteristics at Ta=25°C**

[VIF Section]

			Test Point	min	typ	max	unit
Circuit Current	$I_6+I_{17}$	S1=on, $V_{13}=11V$	Pins6,17	45	57	71	mA
Quiescent Video	$V_{21}$	S1=on, $V_{13}=11V$	Pin21	5.8	6.2	6.6	V
Output Voltage							
Maximum RF AGC Voltage	$V_{11H}$	S1=off, $V_{13}=11V$	Pin11	10.6	11	11.4	V
Minimum RF AGC Voltage	$V_{11L}$	S1=on, $V_{13}=11V$	Pin11		0	0.5	V
Quiescent AFT	$V_{16}$	S1=on, $V_{13}=11V$	(B)	3.5	6.5	7.5	V
Output Voltage							
Input Sensitivity	$V_i$	S1→off, S2→(a)	(A)	33	39	45	dB/uV
AGC Range	GR	S1→on, S2→(a)	(A)	60	65		dB
Maximum Allowable Input	$V_i$ max	S1→on, S2→(a)	(A)	100	200		mVrms
Video Output Amplitude	$V_o$ (video)	S1→on, S2→(a)	(A)	1.9	2.2	2.5	Vp-p
Output S/N	S/N	S1→on, S2→(a)	(A)	49	53		dB
Sync Signal Tip Voltage	$V_{21}$ tip	$V_i=10mV, S1=on$	(A)	3.4	3.65	3.9	V
920kHz Beat Level	$I_{920}$	P=0, S1=on, C=-4dB, S=-14dB(2Vp-p)	(A)	38	46		dB
Frequency Characteristic	$f_c$	P=0, S=-14dB	(A)	6	7		MHz
SIF Output Signal Voltage	$V_o$ (SIF)	P=0, S=-20dB	(A)	110	180	260	mVrms
Differential Gain	DG	fp=58.75MHz, $V_i=10mV, mod 87.5%$ , video signal	(A)		5	10	%
Differential Phase	DP	fp=58.75MHz, $V_i=10mV, mod 87.5%$ , video signal	(A)		3	10	deg
White Noise	$V_{WTH}$		(A)	6.4	6.8	7.2	V
Threshold Voltage							
White Noise	$V_{WCL}$		(A)	4.2	4.6	5.0	V
Clamping Voltage							
Black Noise	$V_{BTH}$	S1→on, S2→(a)	(A)	2.3	2.6	2.9	V
Threshold Voltage							
Black Noise	$V_{BCL}$	S1→on, S2→(a)	(A)	4.1	4.5	4.9	V
Clamping Voltage							
Maximum AFT Voltage	$V_{16H}$	S2→(a)	(B)	11.0	11.5	12.0	V
Minimum AFT Voltage	$V_{16L}$	S2→(a)	(B)	0	0.5	1.0	V
AFT Detection Sensitivity	$S_f$	S2→(a)	(B)	37	50	70	mV/kHz
Input Resistance	$r_i$	f=58.75MHz		0.8	1.3	1.75	kohm
Input Capacity	$c_i$	f=58.75MHz			3.0	6.0	pF
APC Pull-in Range(U)1	$f_{PU-1}$	S1→on, S2→(b)	(A)	+0.5	0.8		MHz
APC Pull-in Range(L)1	$f_{PL-1}$	S1→on, S2→(b)	(A)		-0.8	-0.5	MHz
APC Pull-in Range(U)2	$f_{PU-2}$	S1→on, S2→(a)	(A)	+0.6	+2		MHz
APC Pull-in Range(L)2	$f_{PL-2}$	S1→on, S2→(a)	(A)		-2	-1.25	MHz


Continued on next page.

Continued from preceding page.

			Test Point	min	typ	max	unit
Lock Detection Threshold Voltage	$V_{13TH}$	S3→(b)	Pin22	11	11.5		V
VCO Maximum Variable Range	$\Delta f_U$	S1=on, $V_{20}=4V$	(A)	0.5	2.1		MHz
VCO Maximum Variable Range	$\Delta f_L$	S1=on, $V_{20}=8V$	(A)		-2.1	-1.2	MHz
VCO Control Sensitivity [SIF Section]	$\beta$	$V_{20}=6V$ to $5.6V$	(A)	1.4	2.8	5.6	kHz/mV
SIF Limiting Voltage	$V_i(lim)$	$V_{13}=10V$	(C)		250	500	$\mu V_{rms}$
FM Detection Output Voltage	$V_o$	$V_{13}=10V$	(C)	-5.1	-1.5	+0.5	dBs*
AM Rejection	AMR	$V_{13}=10V$	(C)	40	55		dB
Distortion [Audio Section]	THD(Det)	$V_{13}=10V$	(C)		0.5	1	%
DC VR Maximum Attenuation	$A_{TT}$	$V_{23}=8V \rightarrow 0V, V_{13}=10V$	(D)	70	75		dB
AF Amp Voltage Gain	$G_{AF}$	$V_{23}=8V, V_{13}=10V$	(D)	18	20	22	dB
AF Amp Distortion	THD(AF)	$V_{23}=8V, V_{13}=10V, f=400Hz$	(D)		0.5	1	%
AF Amp Maximum Output Voltage	$V_o \max(AF)$	$V_{23}=8V, V_{13}=10V$	(D)	3	4		Vrms

\*:  $0dBs=0.7745V_{rms}$

Equivalent Circuit Block Diagram

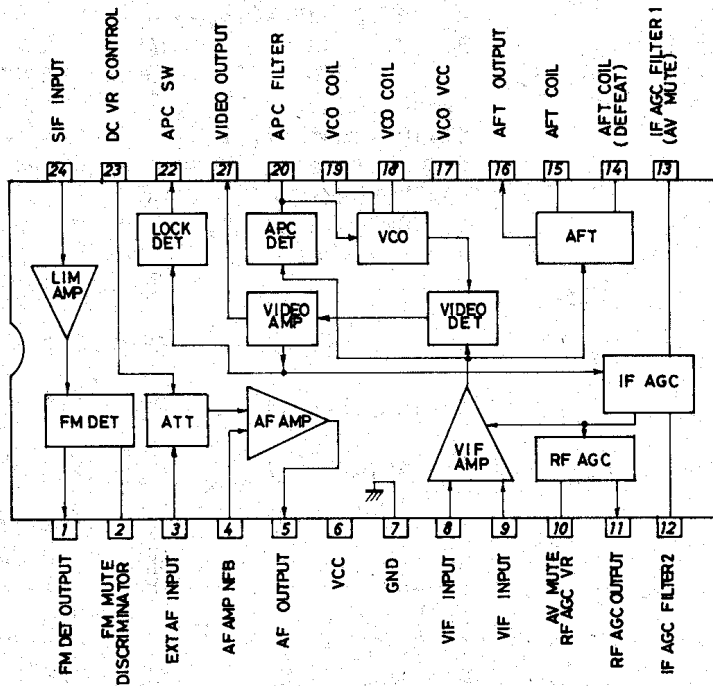

This datasheet has been download from:

[www.datasheetcatalog.com](http://www.datasheetcatalog.com)

Datasheets for electronics components.