

88.8 mm

60.8 mm


►17.5 mm

1

0000

œ

D-

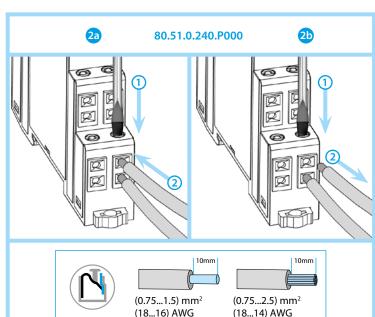

2

B 0.1...2 s 1...20 min 0.1...2 h 1...24 h 1...20 s 0.1...2 min



4






 Open Type Device Pollution degree 2 Installation Environment Maximum Surrounding Air Temperature 40°C • Use 60/75°C copper (Cu) conductor only and wire ranges No. 14–18 AWG, stranded or solid • Terminal tightening torque of 7.1 lb.in. (0.8 Nm)

80.51.0.240.P000

4c



Utility Model - IB8051VXX - 10/18 - FINDER S.p.A. - 10040 ALMESE (TO) - ITALY

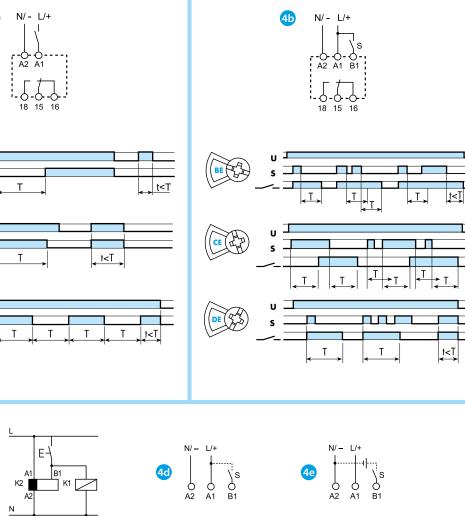

ENGLISH

80.51 MODULAR TIMER, MULTI-FUNCTION

1 FRONT VIEW

- A Time scale rotary selector (Tmax)
- B Time setting (Tmin...Tmax)
- C LED
- D Function rotary selector

TERMINAL PUSH-IN CONNECTION

2a Connection with stranded wire (without screwdriver in case of solid wire) **2b** Disconnection of the electrical connection

B TIME SCALES

(Eq. T=10 min: set A = 20 m and B = 10)

4 WIRING DIAGRAM AND FUNCTIONS NOTE

Time scale and function must be set before energising the timer 4a Without signal START functions:

- Start via contact in supply line (A1)
- AI On-delay
- **DI** Interval
- **SW** Symmetrical flasher (starting pulse on)

4b External START functions:

- Start via contact into control terminal (B1)
- BE Off-delay with control signal CE On-and off-delay with control signal
- DE Interval with control signal on
- 4c Possible to control an external load, such as another relay coil or timer, connected to the signal start terminal B1
- 4d With DC supply, positive polarity has to be connected to B1 terminal (according to EN 60204-1)
- 4e A voltage other than the supply voltage can be applied to the command Start (B1), example:
- A1-A2 = 230 V AC
- B1-A2 = 24 V DC

OTHER DATA

Minimum control impulse: 50 ms. Recovery time: 100 ms. 35 mm rail mount (EN 60715).

WORKING CONDITIONS

In conformity with the European Directive on EMC 2014/30/EC, the timer relay has a level of immunity, against radiated and conducted disturbances, considerably higher than requirements of EN 61812-1 standard. However, devices like transformers, motors, contactors, switches and power cables may cause disturbances and even damage the timer electronic circuit. For that reason, the wiring cables must be as short as possible, and, when necessary, the timer shall be protected by the relevant RC network, varistor or surge voltage protector.

