

LM331


V-F Converter

Features


- Guaranteed linearity: 0.01% max.
- Low power dissipation: 15mW at 5V
- Wide range of full scale frequency: 1Hz to 100KHz
- Pulse output compatible with all logic forms
- Wide dynamic range: 100dB min at 10KHz full scale frequency

Description

This voltage to frequency converter provides the output pulse train at a frequency precisely proportional to the applied input voltage. The LM331 can operate at power supplies as low as 4.0V and be changed output frequency from 1Hz to 100KHz. It is ideally suited for use in simple low cost circuit for analog-to digital conversion, long term integration, linear frequency modulation or demodulation, frequency to voltage conversion, and many other functions.



Internal Block Diagram

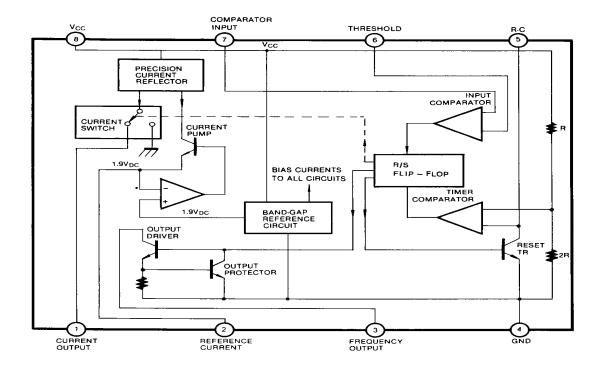

Absolute Maximum Ratings (T_A = 25°C)

Parameter	Symbol	Value	Unit
Supply Voltage	Vcc	40	V
Input Voltage	VI	-0.2 ~ + VCC	V
Operating Temperature Range	TOPR	0 ~ +70	°C
Power Dissipation	PD	500	mW

Electrical Characteristics

Parameter	Symbol	Conditions	Min.	Тур.	Max.	Unit	
VFC Non-Linearity	VFCNL	4.5 ≤ V _{CC} ≤ 20V	-	±0.003	±0.01	% Full-Scale	
Conversion Accuracy Scale Factor	ACCUR	V _I = -10V, R _S = 14KΩ	0.90	1.00	1.10	KHz/V	
Chang Of Gain With VCC	Vcc∆G/Vcc	4.5V ≤ V _{CC} ≤ 10V	-	0.01	0.1	%/V	
		10V ≤ VCC ≤ 40V	-	0.006	0.06	-	
Rated Full - Scale Frequency	f	V _I = -10V	10.0	-	-	KHz	
INPUT COMPARATOR							
Offset Voltage	VIO	0°C ≤ T _A ≤ +70°C	-	±3	±10	mV	
Bias Current	IBIAS	-	-	-80	-300	nA	
Offset Current	lio	-	-	±8	±100	nA	
Common-Mode Range	Vсм	0°C ≤ T _A ≤ +70°C	-0.2	-	Vcc- 2.0	V	
TIMER (PIN 5)			•				
Timer Threshold Voltage	VTH	-	0.63	0.667	0.701	×Vcc	
Input Bias Current	IBIAS	$VCC = 15V, \\ 0V \le V_5 \le 9.9V$	-	±10	±100	nA	
		V ₅ = 10V	-	200	1000	nA	
Saturation Voltage	VSAT	I = 5mA	-	0.22	0.5	V	
CURRENT SOURCE (PIN 1)			•				
Output Current	lo	Rs = 14KΩ, V1= 0V	116	136	156	μΑ	
Change with Voltage	ΔΙΟ/ΔV1	$0V \le V_1 \le 10V$	-	0.2	1.0	μΑ	
Current Source Off Leakage	ILKG	-	-	0.02	10.0	nA	
REFERENCE VOLTAGE (PIN 2)							
Reference Voltage	VREF	-	1.70	1.89	2.08	VDC	
Stability vs Temperature	STT	-	-	±60	-	ppm/°C	
Stability vs Time, 1000Hours	STT	-	-	±0.1	ı	%	
LOGIC OUTPUT (Pin 3)							
Saturation Voltage	VSAT	I = 5mA	-	0.15	0.50	V	
		I = 3.2mA	-	0.10	0.40	v	
Off Leakage	ILKG	-	-	±0.05	1.0	μΑ	
SUPPLY CURRENT							
Supply Current	lcc	Vcc = 5V	1.5	3.0	6.0	mA	
Cappiy Curron		VCC = 40V	2.0	4.0	8.0	111/1	

Typical Applications

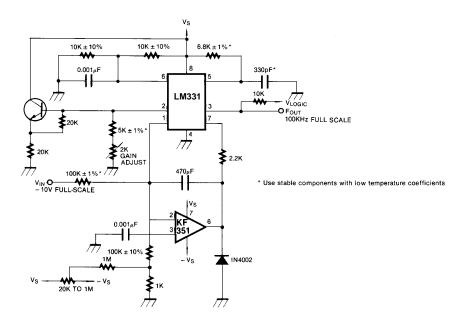


Figure 1. Precision Voltage-to-Frequency Converter, 100KHz Full-Scale

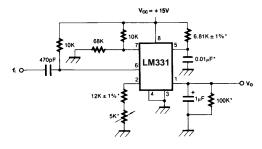


Figure 2. Simple Frequency-to-Voltage Converter, 10KHz Full-Scale

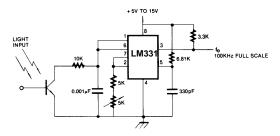



Figure 3. Light Intensity to Frequency Converter

Mechanical Dimensions

Package

Dimensions in millimeters

8-DIP

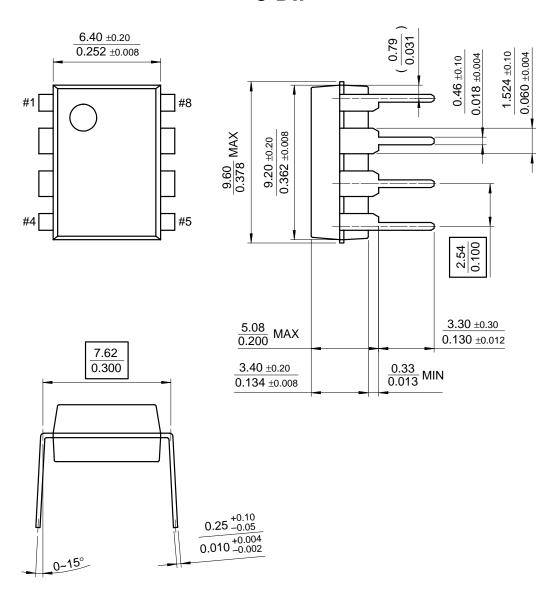

Ordering Information

Product Number	Package	Operating Temperature
LM331N	8-DIP	0 ~ + 70°C

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
- A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

www.fairchildsemi.com

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.