



Main

Range of product	Zelio Analog
Product or component type	Voltage/Current converter
Analogue input type	Current 0...5 A AC/DC 50/60 Hz Current 0...15 A AC/DC 50/60 Hz Current 0...1.5 A AC/DC 50/60 Hz
Analogue output type	Voltage 0...10 V \geq 100 kOhm by cabling Current 4...20 mA \leq 500 Ohm by cabling Current 0...20 mA \leq 500 Ohm by cabling

Complementary

Protection type	Overvoltage protection on output (+/- 30 V) Reverse polarity protection on output Short-circuit protection on output
Abnormal analogue output voltage	< 0 V when no input wired or wire broken
Abnormal analogue output current	< 0.004 A, range: 4...20 mA when no input wired or wire broken 0 A, range: 0...20 mA when no input wired or wire broken
[Us] rated supply voltage	24 V DC +/- 20 %, isolated
Current consumption	\leq 90 mA for current output \leq 70 mA for voltage output
Local signalling	LED green (power ON)
Measurement error	+/- 5 % of full scale at 20 °C +/- 10 % of full scale at 20 °C (electromagnetic interference of 10 V/m)
Repeat accuracy	+/- 0.6 % full scale at 60 °C +/- 0.2 % full scale at 20 °C
Temperature coefficient	500 ppm/°C, range: 0...1.5 A 2000 ppm/°C, range: 0...15 A 1000 ppm/°C, range: 0...5 A
Clamping connection capacity	1 x 2.5 mm ² 2 x 1.5 mm ²
Tightening torque	0.6...1.1 N.m
Marking	CE
Surge withstand	0.5 kV for 1.2/50 μ s conforming to IEC 61000-4-5
[Ui] rated insulation voltage	2 kV
Fixing mode	Clip-on, 35 mm symmetrical DIN rail By screws, mounting plate
Product weight	0.15 kg


Environment

Standards	IEC 60584-1 IEC 60947-1
Product certifications	CSA GL UL
IP degree of protection	IP50 housing IP20 terminal block
Fire resistance	850 °C conforming to UL 850 °C conforming to IEC 60695-2-1
Shock resistance	50 gn for 11 ms conforming to IEC 60068-2-27
Vibration resistance	5 gn (f = 10...100 Hz) conforming to IEC 60068-2-6

Resistance to electrostatic discharge	8 kV (in air) conforming to IEC 61000-4-2 level 3 6 kV (in contact) conforming to IEC 61000-4-2 level 3
Resistance to fast transients	2 kV on power supply conforming to IEC 61000-4-4 1 kV on input-output conforming to IEC 61000-4-4
Disturbance radiated/conducted	CISPR11 CISPR22 group 1- class B
Ambient air temperature for storage	-40...85 °C
Ambient air temperature for operation	0...60 °C (2 cm spacing) 0...50 °C (mounting side by side)
Pollution degree	2 conforming to IEC 60664-1

Analog Interface: Voltage/Current Converter


Dimensions

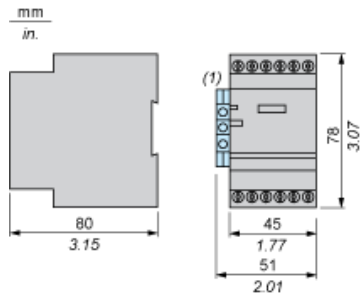


(1) Terminal block AB1TP435U or AB1RRNTP435U2

Mounting

Mounting on Rails AM1•••••

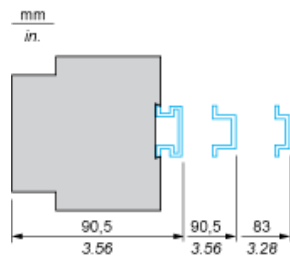


Panel Mounting

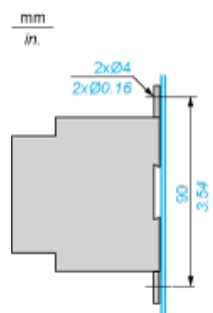

Analog Interface: Voltage/Current Converter

Wiring Diagram

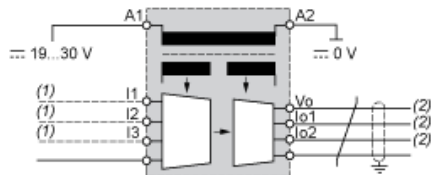

- (1) Use 1 input only.
- (2) Use 1 output only.

The input, output and power supply lines must be kept away from the power cables to avoid effects due to induced interference.

The input and output cables must be shielded as indicated in the schemes and must be kept away from each other.