



CorePro LEDcandle

Corepro candle ND 5.5-40W E14 840 B35 CL

The frosted CorePro LEDcandle is designed for retrofit replacement of incandescent lamps. It is compatible with fixtures with an E14 holder and is an attractive product for chandeliers. LEDlamps deliver huge energy savings and minimize maintenance cost.

Product data


General Information		Starting Time (Nom)	
Cap-Base	E14 [E14]		0.5 s
Reddot Design Award Winner mark	Reddot Design Award Winner 2016	Warm Up Time to 60% Light (Nom)	0.5 s
RoHS mark	RoHS mark	Power Factor (Nom)	0.5
Nominal Lifetime (Nom)	15000 h	Voltage (Nom)	220-240 V
Switching Cycle	50000X		
Technical Type	5.5-40W	Temperature	
		T-Case Maximum (Nom)	85 °C
Light Technical		Controls and Dimming	
Colour Code	840 [CCT of 4000K]	Dimmable	No
Luminous Flux (Nom)	520 lm	Mechanical and Housing	
Luminous Flux (Rated) (Nom)	520 lm	Bulb Finish	Clear (CL)
Colour Designation	Cool White (CW)	Approval and Application	
Colour Temperature, horizontal (Nom)	4000 K	Energy Efficiency Label	A+
Luminous Efficacy (rated) (Nom)	94.55 lm/W	Energy Consumption kWh/1000 h	6 kWh
Color Consistency	<6	Product Data	
Colour Rendering Index horiz (Nom)	80	Full product code	871869654340500
LLMF At End Of Nominal Lifetime (Nom)	70 %	Order product name	Corepro candle ND 5.5-40W E14 840 B35 CL
Operating and Electrical		EAN/UPC - Product	8718696543405
Input Frequency	50 to 60 Hz	Order code	54340500
Power (Rated) (Nom)	5.5 W		
Lamp Current (Nom)	50 mA		

CorePro LEDcandle

Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929001206002

Net Weight (Piece)	0.040 kg
--------------------	----------



Dimensional drawing

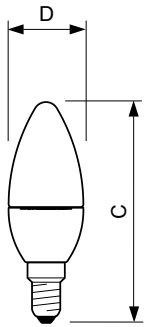

LED ND 5.5-40W E14 840 B35 CL


Product	D	C
Corepro candle ND 5.5-40W E14 840 B35 CL	35 mm	106 mm

Photometric data

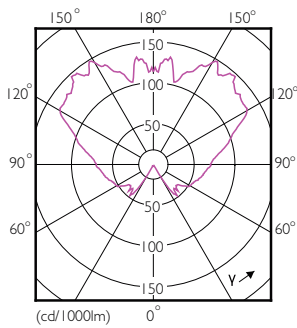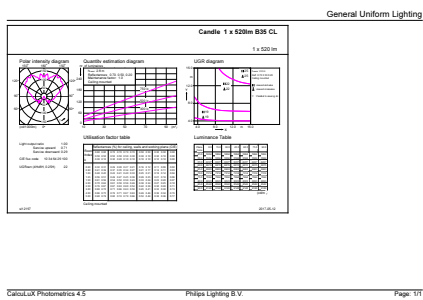

CorePro LEDcandle 40W E14 840 CL B35

CorePro LEDcandle 40W E14 840 CL B35

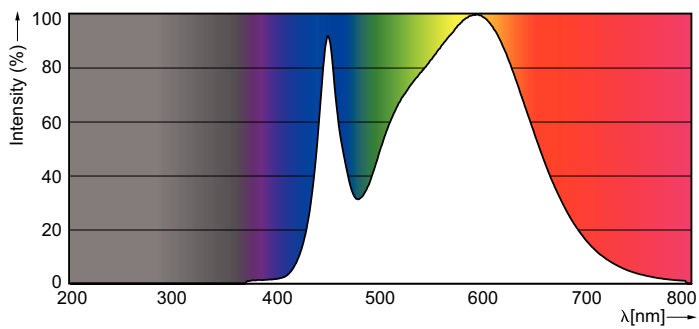

ND E14 /840 B35

CorePro LEDcandle

Lifetime



LEDbulb 60W E14 827 FR B38



LEDbulb 60W E14 827 FR B38

