



CorePro LEDcandle

CorePro LEDcandle ND 5.5-40W E14 865 B35 FR

The frosted CorePro LEDcandle is designed for retrofit replacement of incandescent lamps. It is compatible with fixtures with an E14 holder and is an attractive product for chandeliers. LEDlamps deliver huge energy savings and minimize maintenance cost.

Product data

General Information	
Cap-Base	E14 [E14]
Nominal Lifetime (Nom)	15000 h
Switching Cycle	50000X
Technical Type	5.5-40W
Light Technical	
Colour Code	865 [CCT of 6500K]
Luminous Flux (Nom)	520 lm
Luminous Flux (Rated) (Nom)	520 lm
Colour Designation	Cool Daylight
Colour Temperature, horizontal (Nom)	6500 K
Luminous Efficacy (rated) (Nom)	94.55 lm/W
Color Consistency	<6
Colour Rendering Index horiz (Nom)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and Electrical	
Input Frequency	50 to 60 Hz
Power (Rated) (Nom)	5.5 W
Lamp Current (Nom)	50 mA
Wattage Equivalent	40 W
Starting Time (Nom)	0.5 s


Warm Up Time to 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.5
Voltage (Nom)	220-240 V
Temperature	
T-Case Maximum (Nom)	85 °C
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Bulb Finish	Frosted (FR)
Approval and Application	
Energy Efficiency Label	A+
Energy Consumption kWh/1000 h	6 kWh
Product Data	
Full product code	871869674681300
Order product name	CorePro LEDcandle ND 5.5-40W E14 865 B35 FR
EAN/UPC - Product	8718696746813
Order code	74681300

CorePro LEDcandle

Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929001394502

Net Weight (Piece)	0.040 kg
--------------------	----------


Dimensional drawing




Candle B35 5.5-40W 520lm 6500K E14 ND FR

Product	D	C
CorePro LEDcandle ND 5.5-40W E14 865 B35 FR	35 mm	106 mm


Photometric data

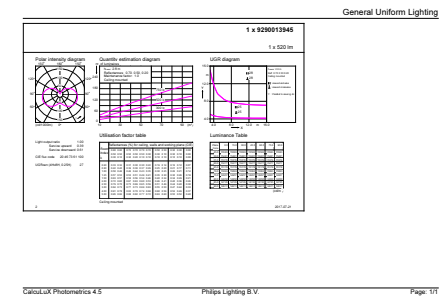

CorePro LEDcandle 40W E14 865 FR B35

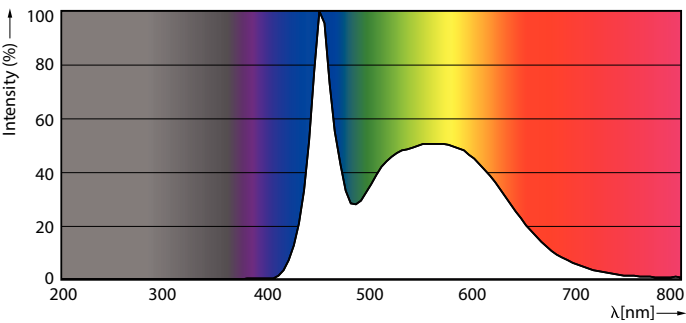


CorePro LEDcandle 40W E14 865 FR B35




CorePro LEDcandle 40W E14 865 FR B35

CorePro LEDcandle

Lifetime

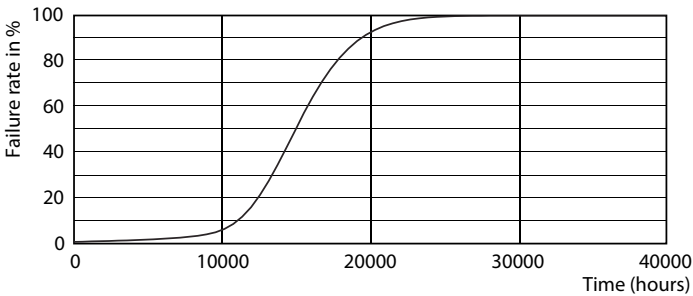

LEDbulb 60W E14 827 FR B38

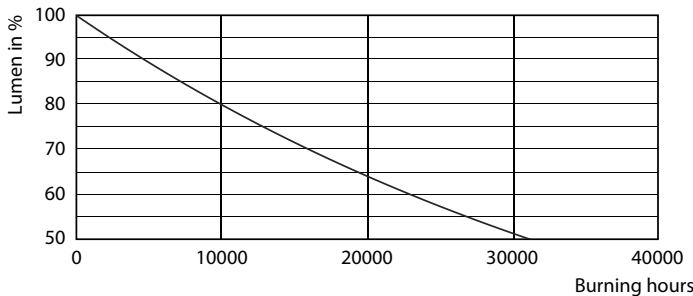

LEDbulb 60W E14 827 FR B38

