



CorePro LEDcandle

Corepro lustre ND 5.5-40W E14 840 P45 CL

The frosted CorePro LEDcandle is designed for retrofit replacement of incandescent lamps. It is compatible with fixtures with an E14 holder and is an attractive product for chandeliers. LEDlamps deliver huge energy savings and minimize maintenance cost.

Product data

General Information	
Cap-Base	E14 [E14]
RoHS mark	RoHS mark
Nominal Lifetime (Nom)	15000 h
Switching Cycle	50000X
Technical Type	5.5-40W
Light Technical	
Colour Code	840 [CCT of 4000K]
Luminous Flux (Nom)	520 lm
Luminous Flux (Rated) (Nom)	520 lm
Colour Designation	Cool White (CW)
Colour Temperature, horizontal (Nom)	4000 K
Luminous Efficacy (rated) (Nom)	94.55 lm/W
Color Consistency	<6
Colour Rendering Index horiz (Nom)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and Electrical	
Input Frequency	50 to 60 Hz
Power (Rated) (Nom)	5.5 W
Lamp Current (Nom)	50 mA
Wattage Equivalent	40 W


Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.5
Voltage (Nom)	220-240 V
Temperature	
T-Case Maximum (Nom)	85 °C
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Bulb Finish	Clear (CL)
Approval and Application	
Energy Efficiency Label	A+
Energy Consumption kWh/1000 h	6 kWh
Product Data	
Full product code	871869654344300
Order product name	Corepro lustre ND 5.5-40W E14 840 P45 CL
EAN/UPC - Product	8718696543443
Order code	54344300

CorePro LEDcandle

Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929001206102

Net Weight (Piece)	0.040 kg
--------------------	----------



Dimensional drawing

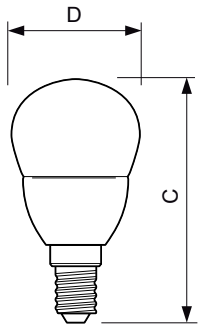

LED ND 5.5-40W E14 840 P45 CL


Product	D	C
Corepro lustre ND 5.5-40W E14 840 P45 CL	45 mm	88 mm

Photometric data

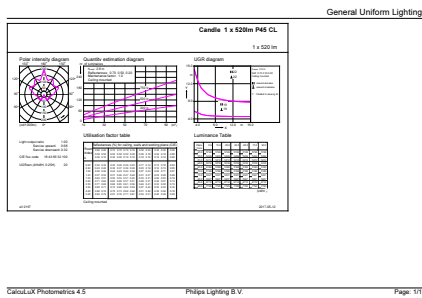

CorePro LEDlustre 40W E14 840 CL P45

CorePro LEDlustre 40W E14 840 CL P45

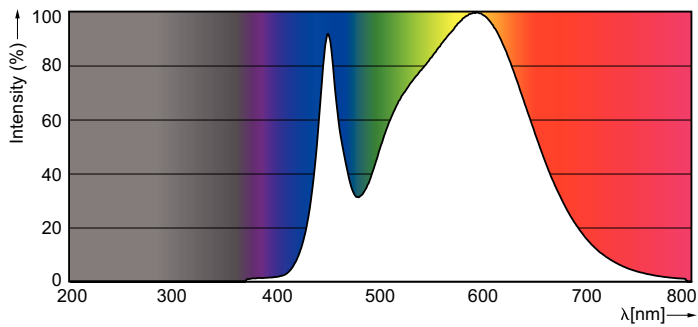

ND E14 /840 P45

CorePro LEDcandle

Lifetime



LEDbulb 60W E14 827 FR B38



LEDbulb 60W E14 827 FR B38

