



# CorePro LEDcandle

## CorePro lustre ND 5.5-40W E14 865 P45 FR

The frosted CorePro LEDcandle is designed for retrofit replacement of incandescent lamps. It is compatible with fixtures with an E14 holder and is an attractive product for chandeliers. LEDlamps deliver huge energy savings and minimize maintenance cost.

### Product data


General Information	
Cap-Base	E14 [ E14]
Nominal Lifetime (Nom)	15000 h
Switching Cycle	50000X
Technical Type	5.5-40W
Light Technical	
Colour Code	865 [ CCT of 6500K]
Luminous Flux (Nom)	520 lm
Luminous Flux (Rated) (Nom)	520 lm
Colour Designation	Cool Daylight
Colour Temperature, horizontal (Nom)	6500 K
Luminous Efficacy (rated) (Nom)	94.55 lm/W
Color Consistency	<6
Colour Rendering Index horiz (Nom)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and Electrical	
Input Frequency	50 to 60 Hz
Power (Rated) (Nom)	5.5 W
Lamp Current (Nom)	50 mA
Wattage Equivalent	40 W
Starting Time (Nom)	0.5 s

Warm Up Time to 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.5
Voltage (Nom)	220-240 V
Temperature	
T-Case Maximum (Nom)	85 °C
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Bulb Finish	Frosted (FR)
Approval and Application	
Energy Efficiency Label	A+
Energy Consumption kWh/1000 h	6 kWh
Product Data	
Full product code	871869674683700
Order product name	CorePro lustre ND 5.5-40W E14 865 P45 FR
EAN/UPC - Product	8718696746837
Order code	74683700
Numerator - Quantity Per Pack	1

# CorePro LEDcandle

Numerator - Packs per outer box	10
Material Nr. (12NC)	929001394602
Net Weight (Piece)	0.040 kg


## Dimensional drawing




Candle P45 5.5-40W 520lm 6500K E14 ND FR

Product	D	C
CorePro lustre ND 5.5-40W E14 865 P45 FR	45 mm	88 mm


## Photometric data

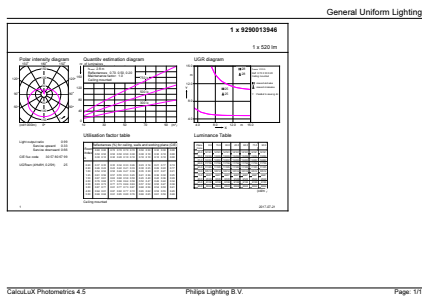

CorePro LEDlustre 40W E14 865 FR P45

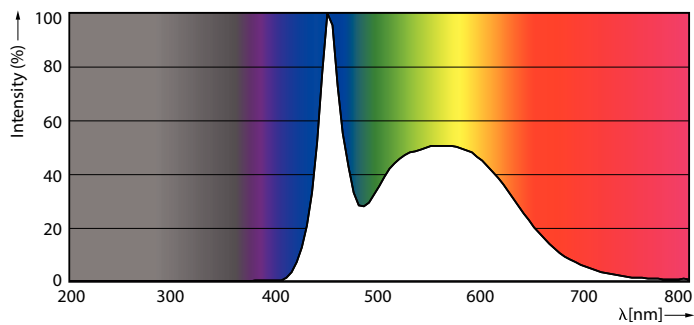

CorePro LEDcandle 40W E14 865 FR B35

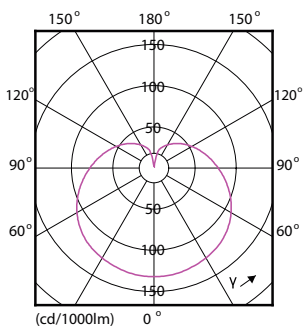

CorePro LEDlustre 40W E14 865 FR P45

# CorePro LEDcandle

## Lifetime



LEDbulb 60W E14 827 FR B38



LEDbulb 60W E14 827 FR B38

