
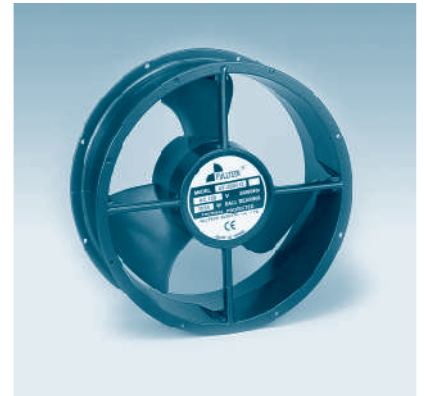
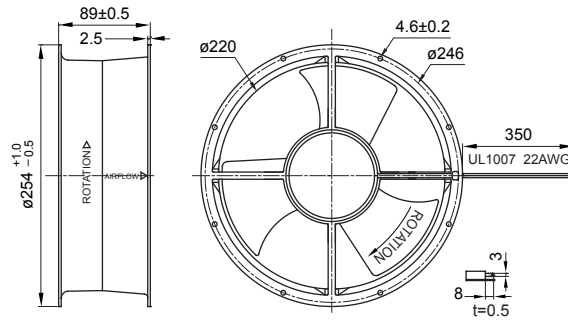


UF25G(C) Series

Size: 254 x 254 x 89
Unit : mm


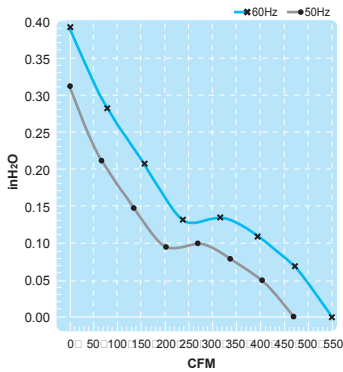


Terminal or Lead Wire Type

Thermal Protection

Spec. Model	Rated Voltage V	Frequency Hz	Input Power W	Rated Current A	Locked Current A	Speed RPM	Maximum Air Flow m ³ /min.	Maximum Air Flow CFM	Maximum Pressure mmH ₂ O	Maximum Pressure InchH ₂ O	Noise dB	Weight kg
UF25GC10-H	100V	50 60	36 36	0.45 0.40	0.74 0.72	1400 1650	13.0 15.5	460 550	8.0 10.0	0.32 0.40	52 55	1.9
UF25GC11-H	115V	50 60	31 33	0.30 0.29	0.53 0.51	1400 1650	13.0 15.5	460 550	8.0 10.0	0.32 0.40	52 55	1.9
UF25GC20-H	200V	50 60	36 36	0.22 0.19	0.35 0.34	1400 1650	13.0 15.5	460 550	8.0 10.0	0.32 0.40	52 55	1.9
UF25GC23-H	230V	50 60	31 33	0.14 0.14	0.26 0.25	1400 1650	13.0 15.5	460 550	8.0 10.0	0.32 0.40	52 55	1.9

UF25G(CE) Series

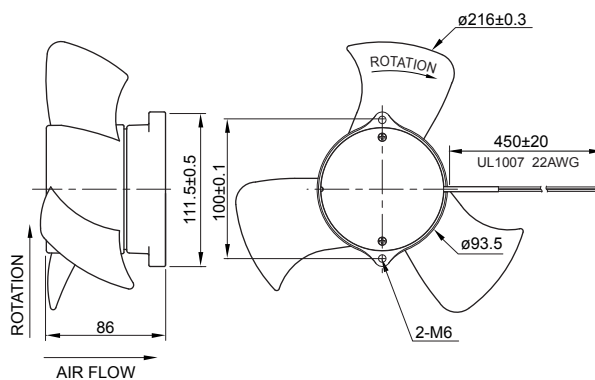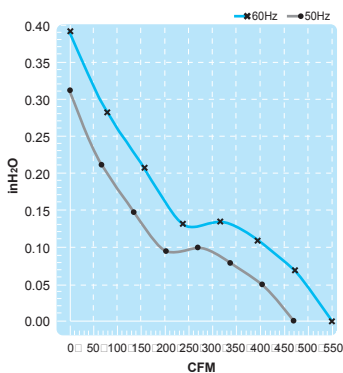

Lead Wire Type

Thermal Protection

Spec. Model	Rated Voltage V	Frequency Hz	Input Power W	Rated Current A	Locked Current A	Speed RPM	Maximum Air Flow m ³ /min.	Maximum Air Flow CFM	Maximum Pressure mmH ₂ O	Maximum Pressure InchH ₂ O	Noise dB	Weight kg
UF25GCE11-H	115V	50 60	36 39	0.30 0.29	0.53 0.51	1400 1650	13.0 15.5	460 550	8.0 10.0	0.32 0.40	52 55	1.4
UF25GCE23-H	230V	50 60	36 39	0.14 0.14	0.26 0.25	1400 1650	13.0 15.5	460 550	8.0 10.0	0.32 0.40	52 55	1.4