Screw type

R13-405

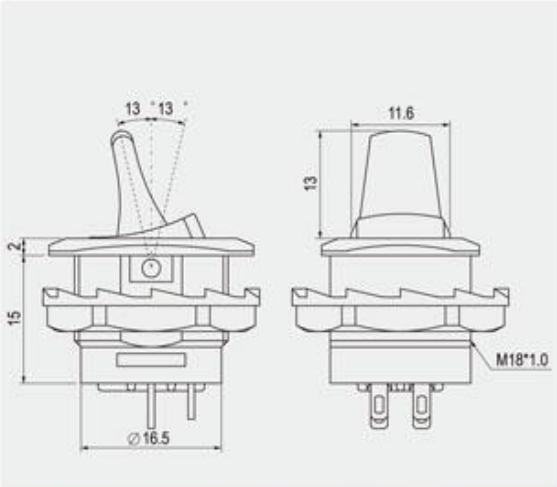

Rating
10A 125V AC 6A 250V AC
Contact resistance
50mΩ Max
Insulation resistance
DC 500V 100MΩ Min
Dielectric strength
AC 1500V 1 minute
Cut-out



5 mm max

FEATURES

* MATERIAL: Frame is nylon (UL flame: 94V-2). Base is PBT (UL flame: 94V-0). Terminals are silver plated brass.
* LED indicator on the top of lever. (AL , CL, DL type only). LED available with red, amber, green, blue and white colors.

R13-405 ▢▢-▢▢

FUNCTION		TERMINAL
A  4P DPST	A L  4P SPST (LED)	0 5 SO
C  6P DPDT	C L  5P SPDT (LED)	
D  6P DPDT	D L  5P SPDT (LED)	
G  6P DPDT	* ( ) =momentary	