

LED
PANEL LIGHT



Flush Mounted Slim LED Panel
6500K

Slim LED Panel (6500K)

- High quality reinforced plastic body. Applicable to many areas such as stone wool and drywall and easy to mount.
- Equipped with antireflective diffuser covers with homogenous dispersion, resistant to bleaching and changing colors during its lifetime.
- LED panel luminaries with separate, energy-saving and constant current outlet drivers.

Product Details

Product Code	Type	Power (W)	Lamp Type	Luminous Flux	Dimensions (mm)	Cutout ø (mm)	Weight (kg)
LPLA11W036	Circular	3	LED	160lm	85 ø	70 ø	0,070
LPLA11W066	Circular	6	LED	360lm	120 ø	105 ø	0,100
LPLA11W126	Circular	12	LED	850lm	170 ø	155 ø	0,170
LPLA11W156	Circular	15	LED	1080lm	185 ø	170 ø	0,200
LPLA11W186	Circular	18	LED	1350lm	225 ø	210 ø	0,300

Technical Information



Areas of Usage



3W Circular Type LED Panel - 6500K

LPLA11W036

3W



Technical Specifications

220V - 240V


6500K

160lm

Ra > 80


- Long-lasting LED 20,000 hours
- High surge protection: 0.5kV
- Confirmed CE and IEC safety standard
- Optics: Polycarbonate diffuser

Technical Drawing

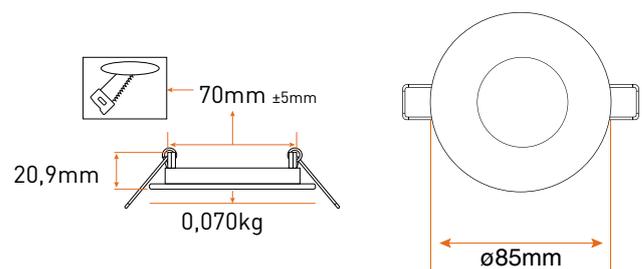

6W Circular Type LED Panel - 6500K

6W

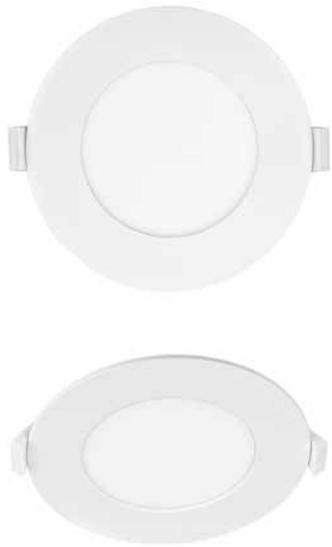

LPLA11W066

Technical Specifications

220V - 240V


6500K

360lm

Ra > 80


- Long-lasting LED 20,000 hours
- High surge protection: 0.5kV
- Confirmed CE and IEC safety standard
- Optics: Polycarbonate diffuser

Technical Drawing

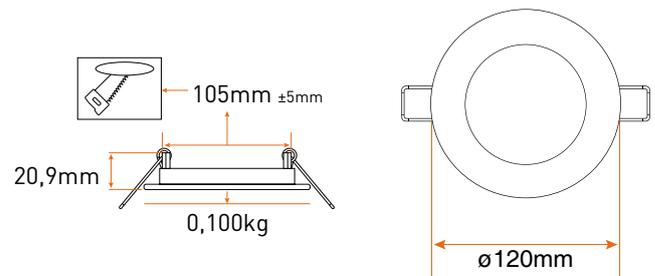

12W Circular Type LED Panel - 6500K

12W

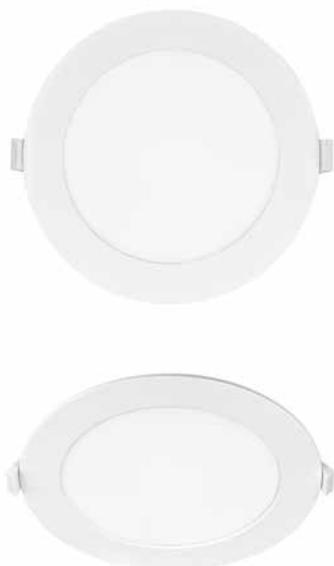

LPLA11W126

Technical Specifications

220V - 240V


6500K

850lm

Ra > 80


- Long-lasting LED 20,000 hours
- High surge protection: 0.5kV
- Confirmed CE and IEC safety standard
- Optics: Polycarbonate diffuser

Technical Drawing

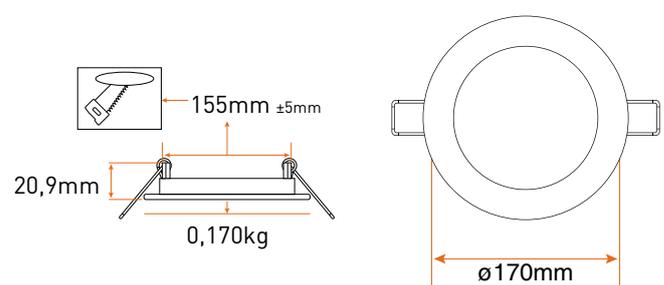

15W Circular Type LED Panel - 6500K

15w

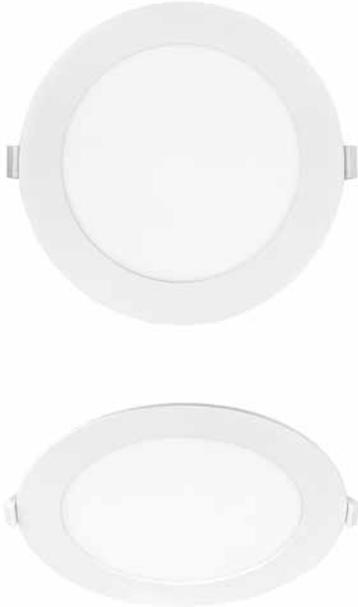

LPLA11W156

Technical Specifications

220V - 240V


6500K

1080lm

Ra > 80

- Long-lasting LED 20,000 hours
- High surge protection: 0.5kV
- Confirmed CE and IEC safety standard
- Optics: Polycarbonate diffuser

Technical Drawing

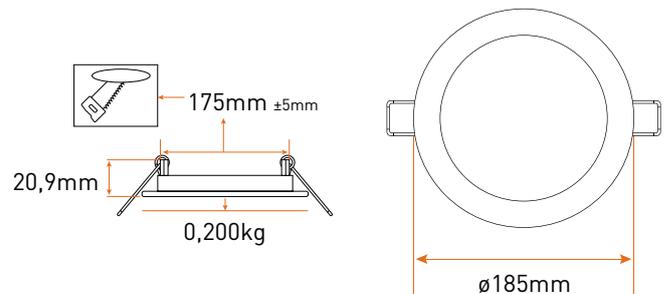

18W Circular Type LED Panel - 6500K

18w



LPLA11W186

Technical Specifications

220V - 240V

6500K

1350lm

Ra > 80

- Long-lasting LED 20,000 hours
- High surge protection: 0.5kV
- Confirmed CE and IEC safety standard
- Optics: Polycarbonate diffuser

Technical Drawing

