



## Flush Mounted Slim LED Panel 4000K

### Slim LED Panel (4000K)

- High quality reinforced plastic body. Applicable to many areas such as stone wool and drywall and easy to mount.
- Equipped with antireflective diffuser covers with homogenous dispersion, resistant to bleaching and changing colors during its lifetime.
- LED panel luminaries with separate, energy-saving and constant current outlet drivers.

### Product Details

Product Code	Type	Power (W)	Lamp Type	Luminous Flux	Dimensions (mm)	Cutout ø (mm)	Weight (kg)
LPLA21W064	Square	6	LED	360lm	120x120	105x105	0,120
LPLA21W124	Square	12	LED	850lm	170x170	155x155	0,210
LPLA21W184	Square	18	LED	1350lm	225x225	210x210	0,360

### Technical Information



### Areas of Usage



## 6W Square Type LED Panel - 4000K

### 6W




### LPLA21W064

#### Technical Specifications

220V - 240V  
4000K  
360lm  
Ra > 80

- Long-lasting LED 20,000 hours
- High surge protection: 0.5kV
- Confirmed CE and IEC safety standard
- Optics: Polycarbonate diffuser

#### Technical Drawing

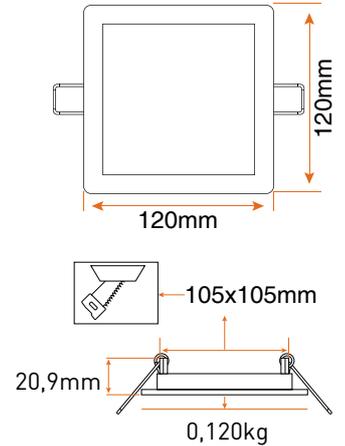

## 12W Square Type LED Panel - 4000K

### 12W




### LPLA21W124

#### Technical Specifications

220V - 240V  
4000K  
850lm  
Ra > 80

- Long-lasting LED 20,000 hours
- High surge protection: 0.5kV
- Confirmed CE and IEC safety standard
- Optics: Polycarbonate diffuser

#### Technical Drawing

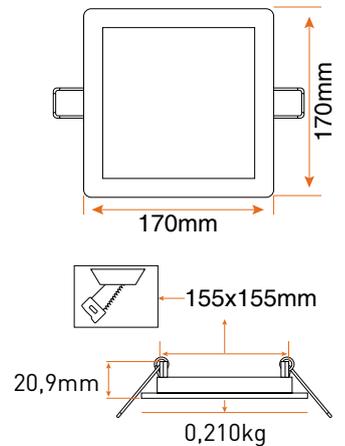

## 18W Square Type LED Panel - 4000K

### 18W



### LPLA21W184

#### Technical Specifications

220V - 240V  
4000K  
1350lm  
Ra > 80

- Long-lasting LED 20,000 hours
- High surge protection: 0.5kV
- Confirmed CE and IEC safety standard
- Optics: Polycarbonate diffuser

#### Technical Drawing

