

LED

PANEL LIGHT



Flush Mounted Slim LED Panel 6500K

Slim LED Panel (6500K)

- High quality reinforced plastic body. Applicable to many areas such as stone wool and drywall and easy to mount.
- Equipped with antireflective diffuser covers with homogenous dispersion, resistant to bleaching and changing colors during its lifetime.
- LED panel luminaries with separate, energy-saving and constant current outlet drivers.

Product Details

Product Code	Type	Power (W)	Lamp Type	Luminous Flux	Dimensions (mm)	Cutout ø (mm)	Weight (kg)
LPLA21W066	Square	6	LED	360lm	120x120	105x105	0,120
LPLA21W126	Square	12	LED	850lm	170x170	155x155	0,210
LPLA21W186	Square	18	LED	1350lm	225x225	210x210	0,360

Technical Information



Areas of Usage



6W Square Type LED Panel - 6500K

6W




LPLA21W066

Technical Specifications

220V - 240V
6500K
360lm
Ra > 80

- Long-lasting LED 20,000 hours
- High surge protection: 0.5kV
- Confirmed CE and IEC safety standard
- Optics: Polycarbonate diffuser

Technical Drawing

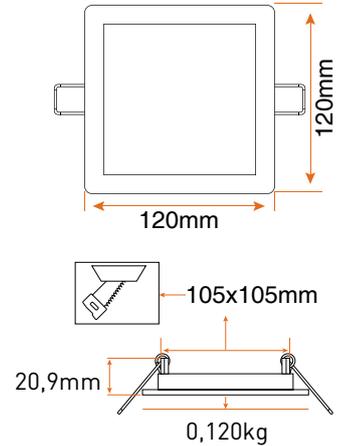

12W Square Type LED Panel - 6500K

12W




LPLA21W126

Technical Specifications

220V - 240V
6500K
850lm
Ra > 80

- Long-lasting LED 20,000 hours
- High surge protection: 0.5kV
- Confirmed CE and IEC safety standard
- Optics: Polycarbonate diffuser

Technical Drawing

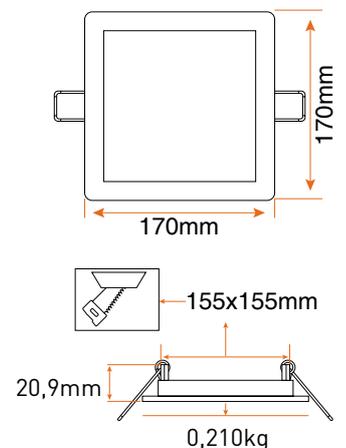

18W Square Type LED Panel - 6500K

18W



LPLA21W186

Technical Specifications

220V - 240V
6500K
1350lm
Ra > 80

- Long-lasting LED 20,000 hours
- High surge protection: 0.5kV
- Confirmed CE and IEC safety standard
- Optics: Polycarbonate diffuser

Technical Drawing

