

# Panasonic

# Slim LED Panel (4000K)




- High quality reinforced plastic body. Applicable to many areas such as stone wool and drywall and easy to mount.
- Equipped with antireflective diffuser covers with homogenous dispersion, resistant to blenching and changing colors during its lifetime.
- LED panel luminaries with energy-saving and constant current outlet drivers.

#### **Product Details**

Product Code	Type	Power (W)	Lamp Type	Luminous Flux	Dimensions (mm)	Cutout ø (mm)	Weight (kg)
LPLA11W034	Circular	3	LED	160lm	85 ø	70 ø	0,070
LPLA11W064	Circular	6	LED	360lm	120 ø	105 ø	0,100
LPLA11W124	Circular	12	LED	850lm	170 ø	155 ø	0,170
LPLA11W154	Circular	15	LED	1080lm	185 ø	170 ø	0,200
LPLA11W184	Circular	18	LED	1350lm	225 ø	210 ø	0,300

#### **Technical Information**





































## **Technical Specifications**


220V - 240V 4000K

160lm

Ra > 80

- Long-lasting LED 20,000 hours
- High surge protection: 0.5kV
- Confirmed CE and IEC safety standard
- Optics: Polycarbonate diffuser

### **Technical Drawing**

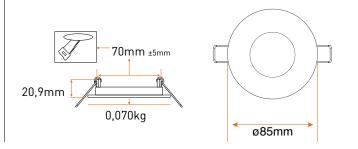




# 6W Circular Type LED Panel - 4000K

# LPLA11W064

# 6W

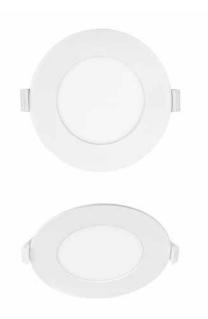


## **Technical Specifications**

220V - 240V 4000K 360lm

Ra > 80

- Long-lasting LED 20,000 hours
- High surge protection: 0.5kV
- Confirmed CE and IEC safety standard
- Optics: Polycarbonate diffuser

# **Technical Drawing**

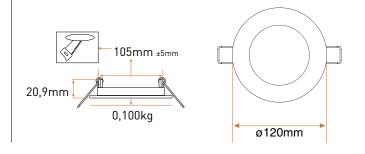

12W Circular Type LED Panel - 4000K



# LPLA11W124

# 12W




# Teknik Özellikler

220V - 240V 4000K 850lm

Ra > 80

- Long-lasting LED 20,000 hours
- High surge protection: 0.5kV
- Confirmed CE and IEC safety standard
- Optics: Polycarbonate diffuser

### Technical Drawing

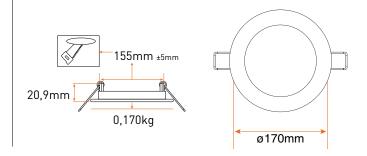

# **Panasonic**

15W Circular Type LED Panel - 4000K



# LPLA11W154




## **Technical Specifications**

220V - 240V 4000K 1080lm

- Ra > 80
- Long-lasting LED 20,000 hours
- High surge protection: 0.5kV
- Confirmed CE and IEC safety standard
- Optics: Polycarbonate diffuser

# **Technical Drawing**

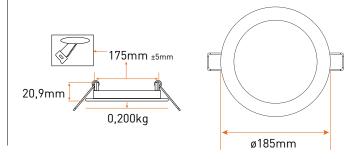

18W Circular Type LED Panel - 4000K



# LPLA11W184



# **Technical Specifications**

220V - 240V 4000K 1350lm

Ra > 80

- Long-lasting LED 20,000 hours
- High surge protection: 0.5kV
- Confirmed CE and IEC safety standard
- Optics: Polycarbonate diffuser

### **Technical Drawing**

