

LED

PANEL LIGHT



Slim LED Panel 4000K

Slim LED Panel (4000K)

- High quality reinforced plastic body. Applicable to many areas such as stone wool and drywall and easy to mount.
- Equipped with antireflective diffuser covers with homogenous dispersion, resistant to bleaching and changing colors during its lifetime.
- LED panel luminaries with separate, energy-saving and constant current outlet drivers.


Product Details

Product Code	Type	Power (W)	Lamp Type	Luminous Flux	Dimensions (mm)	Cutout ø (mm)	Weight (kg)
LPLC21W184	Square	18	LED	1440lm	295x295	-	0,860
LPLC21W364	Square	36	LED	3020lm	595x595	-	2,810

Technical Information



Areas of Usage



18W Square Type LED Panel - 4000K

18w



LPLC21W184

Technical Specifications

220V - 240V


4000K

1440lm

Ra > 80 Pf > 0.9


- Long-lasting LED 20,000 hours
- High surge protection: 0.5kV
- Confirmed CE and IEC safety standard
- Optics: Polycarbonate diffuser

Technical Drawing

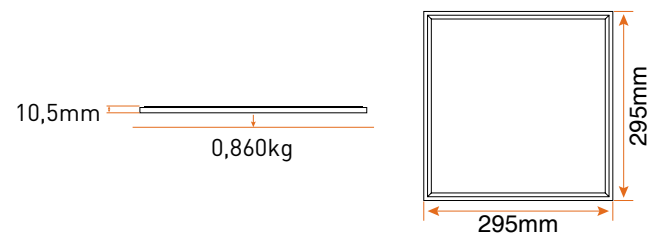

36W Square Type LED Panel - 4000K

36w

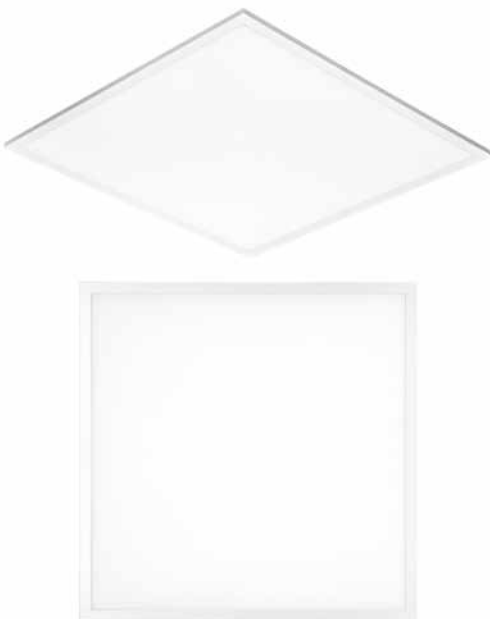

LPLC21W364

Technical Specifications

220V - 240V


4000K

3020lm

Ra > 80 Pf > 0.9

- Long-lasting LED 20,000 hours
- High surge protection: 0.5kV
- Confirmed CE and IEC safety standard
- Optics: Polycarbonate diffuser

Technical Drawing

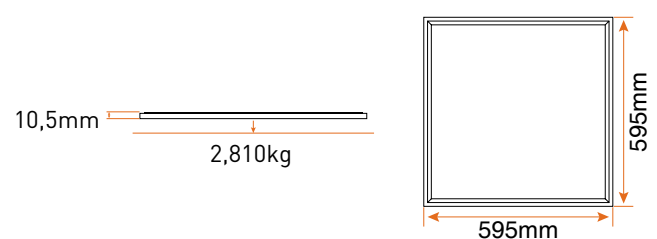

*See page 45 for brackets.