



## Slim LED Panel 6500K

### Slim LED Panel (6500K)

- High quality reinforced plastic body. Applicable to many areas such as stone wool and drywall and easy to mount.
- Equipped with antireflective diffuser covers with homogenous dispersion, resistant to blenching and changing colors during its lifetime.
- LED panel luminaries with separate, energy-saving and constant current outlet drivers.


### Product Details

Product Code	Type	Power (W)	Lamp Type	Luminous Flux	Dimensions (mm)	Cutout ø (mm)	Weight (kg)
LPLC21W186	Square	18	LED	1440lm	295x295	-	0,860
LPLC21W366	Square	36	LED	3020lm	595x595	-	2,810

### Technical Information



### Areas of Usage



## 18W Square Type LED Panel - 6500K

### 18w



**LPLC21W186**

### Technical Specifications

220V - 240V


6500K

1440lm

Ra > 80 Pf > 0.9


- Long-lasting LED 20,000 hours
- High surge protection: 0.5kV
- Confirmed CE and IEC safety standard
- Optics: Polycarbonate diffuser

### Technical Drawing

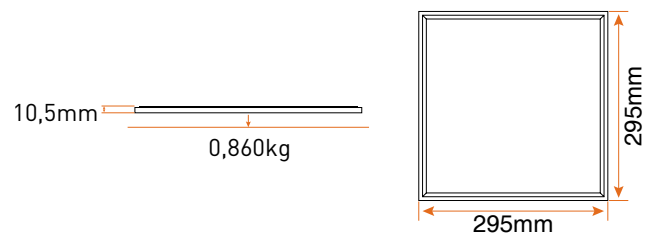

## 36W Square Type LED Panel - 6500K

### 36w

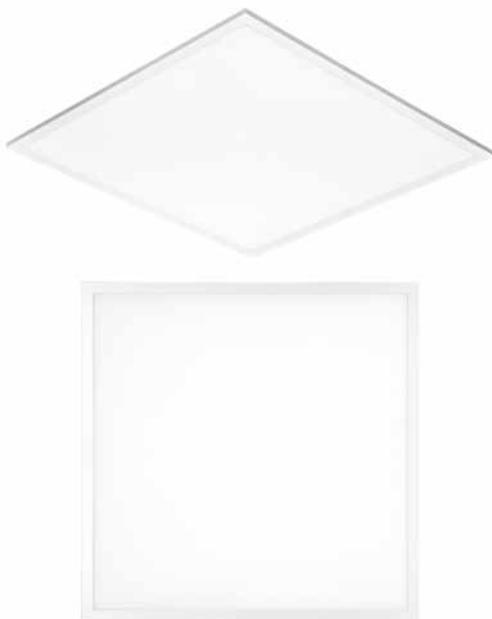

**LPLC21W366**

### Technical Specifications

220V - 240V


6500K

3020lm

Ra > 80 Pf > 0.9

- Long-lasting LED 20,000 hours
- High surge protection: 0.1kV
- Confirmed CE and IEC safety standard
- Optics: Polycarbonate diffuser

### Technical Drawing

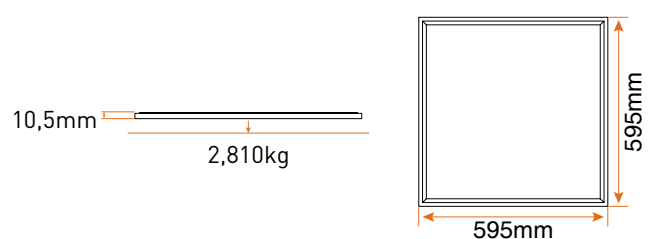

\*See page 45 for brackets.