

stonecold

PM-62X62-350


Performance Specifications

Hot Side Temperature (°C)	25°C	50°C
Qmax (Watts)	257	282
Delta Tmax (°C)	68	79
I _{max} (Amps)	30.5	30.5
V _{max} (Volts)	15.6	17.8
Module Resistance (Ohms)	0.27	0.31



stonecold

PM-62X62-350

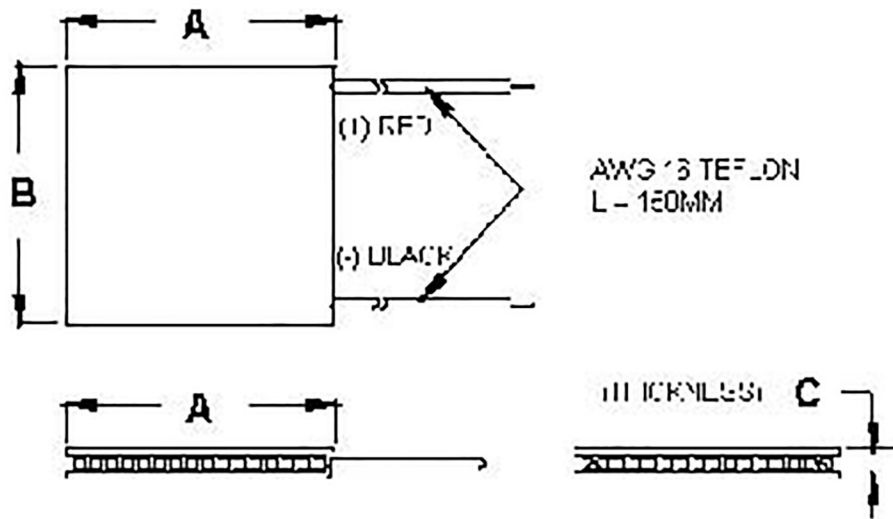

Ceramic Material: Alumina (Al_2O_3)
Solder Construction: 138°C, Bismuth Tin (BiSn)

Size table:





A	B	C			
62	62	3.9			

Operating Tips

- Max. Operating Temperature: 138°C
- Do not exceed I_{max} or V_{max} when operating module.
- Life expectancy: 200,000 hours
-
- Please consult HB for moisture protection options (sealing).
- Failure rate based on long time testings: 0.2%.


stonecold

PM-62X62-350

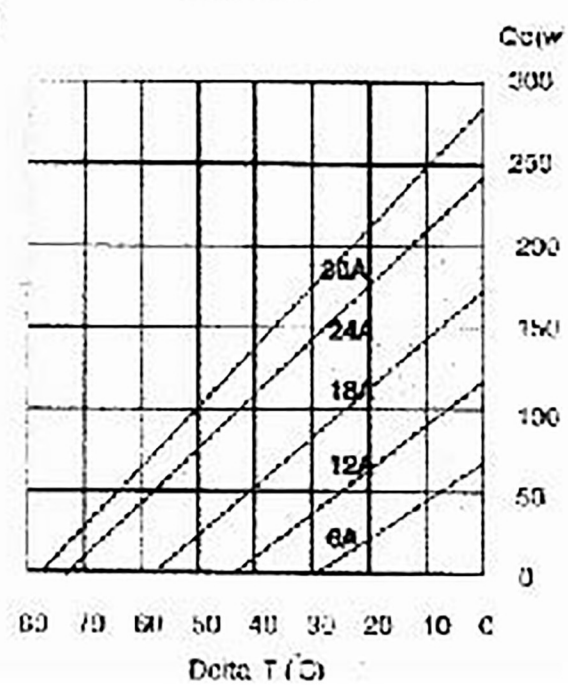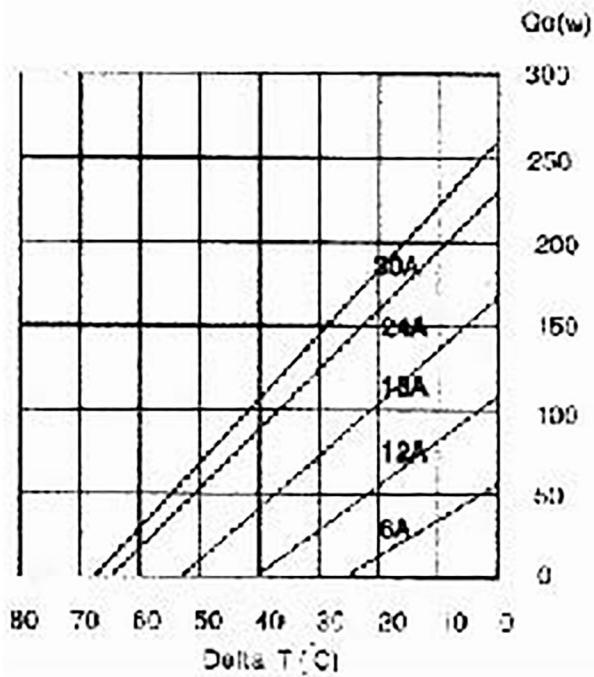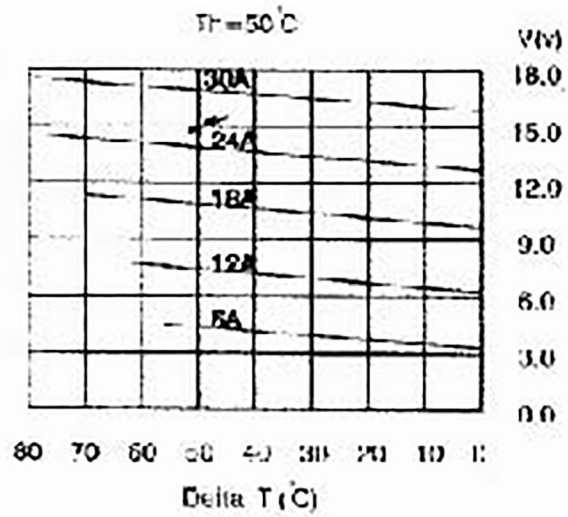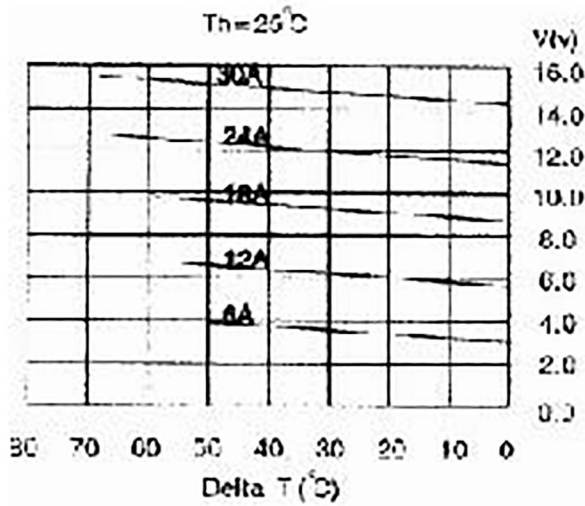

stonecold

PM-62X62-350

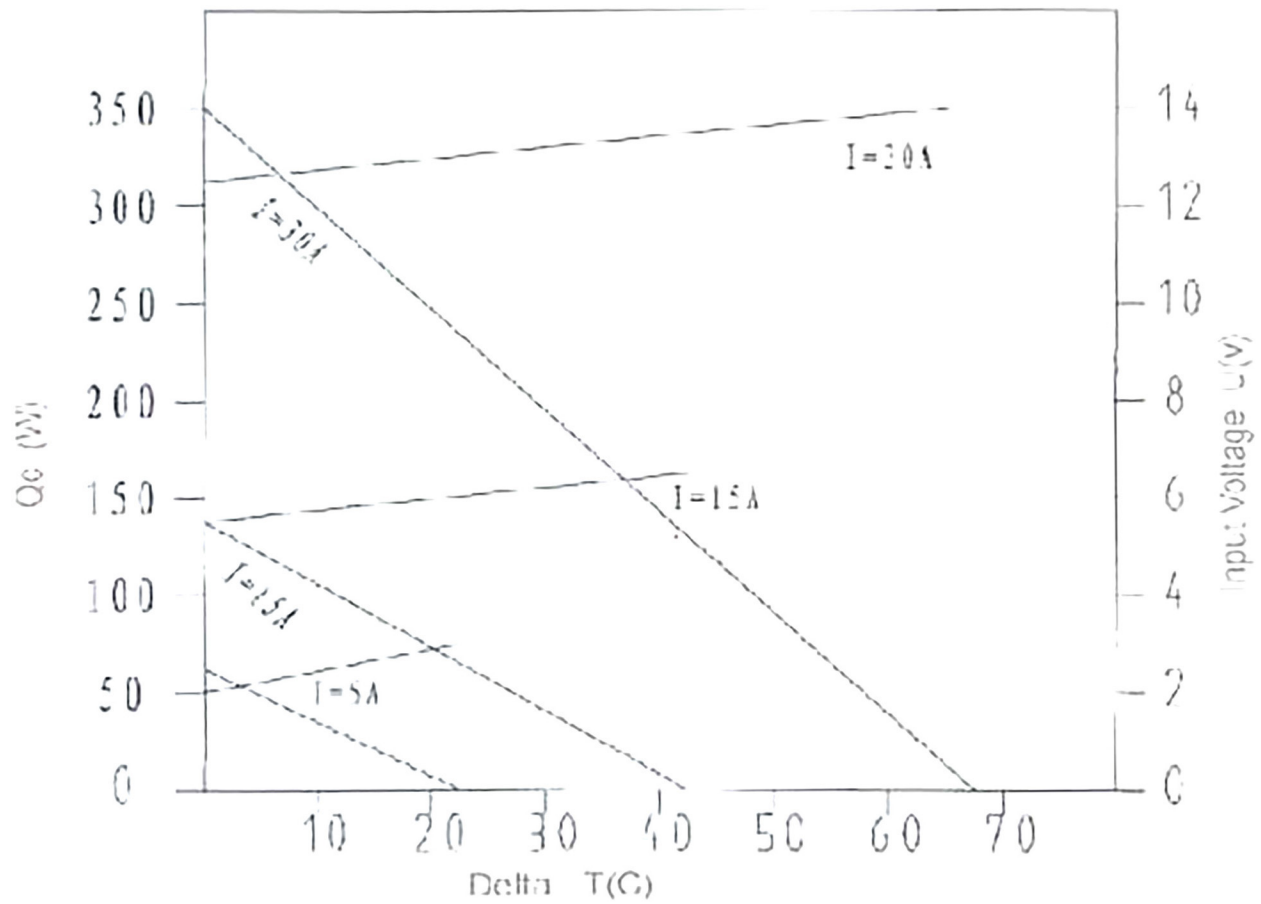


62X62

Input Output Characteristic

stonecold

PM-62X62-350

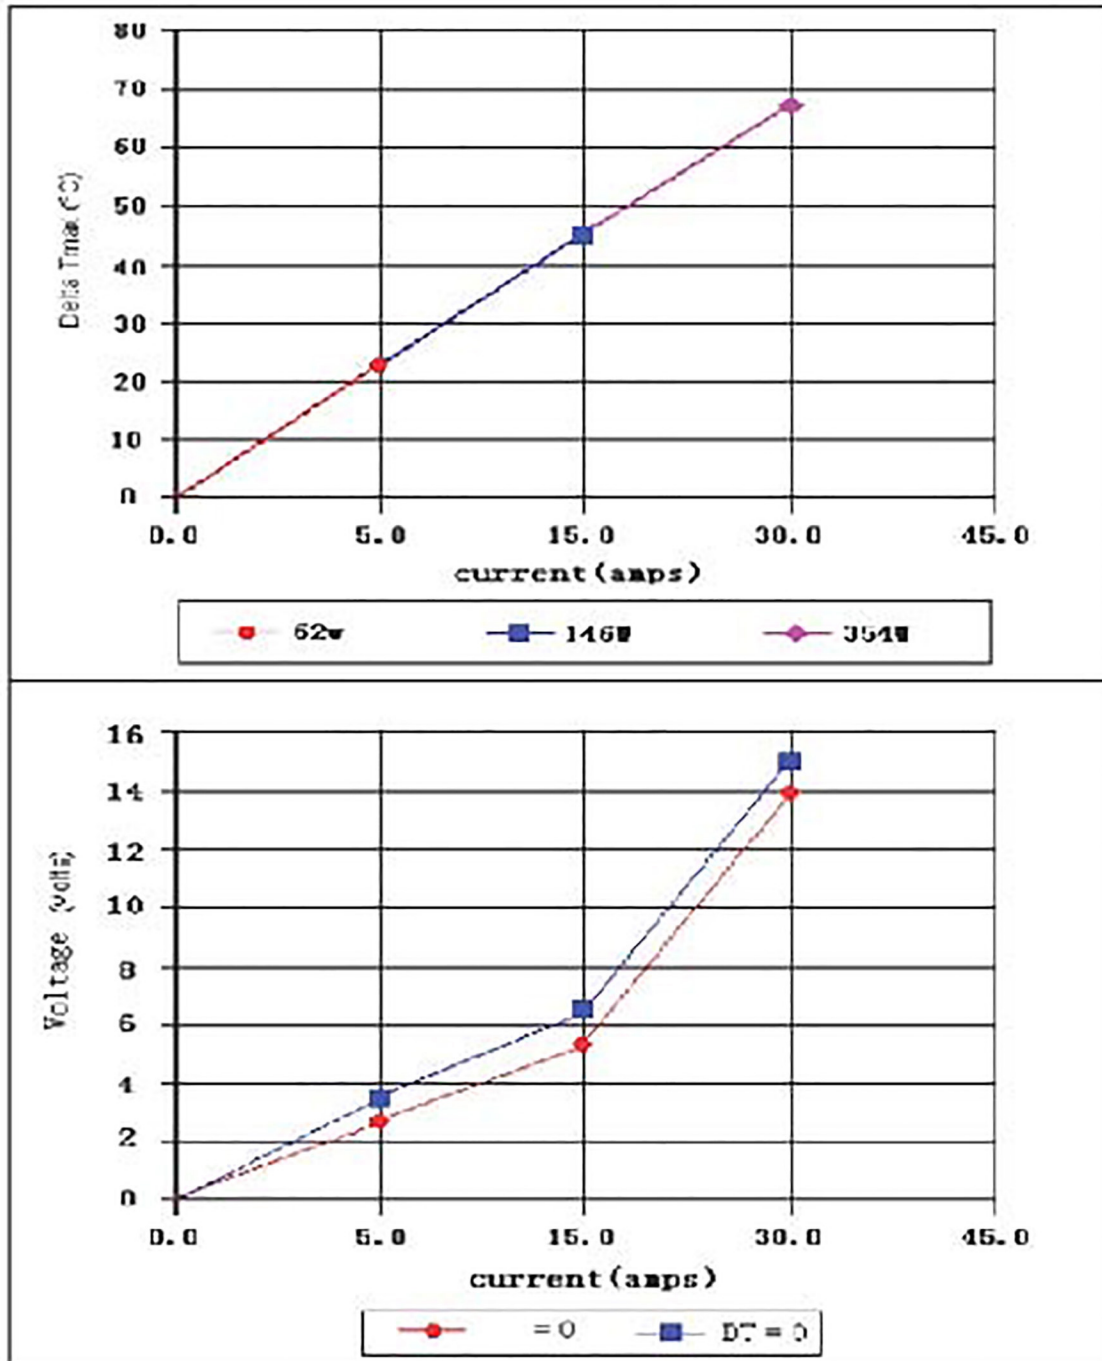

Hot-side temperature of 25 °C