


MCBs RX³ 6000

thermal magnetic MCBs from 6 A to 63 A - B curve

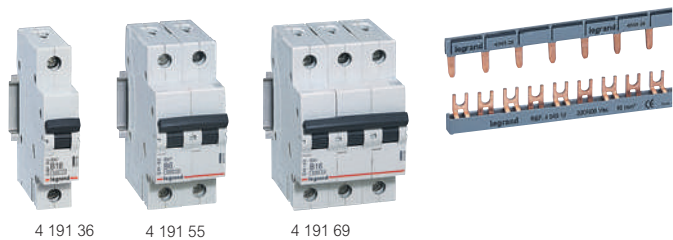

Technical characteristics [see e-catalogue](#)

Conform to IEC 60898-1
Do not accept auxiliaries, and add-on modules
Compatible with prong-type and fork type supply busbars
Breaking capacity:
6000 - IEC 60898-1 - 230/400 V \sim
6 kA - IEC 60947-2 - 230/400 V \sim
10000 - IEC 60898-1 - 127/220 V \sim
10 kA - IEC 60947-2 - 127/220 V \sim


| Pack | Cat.Nos | Single pole 230/400 V \sim | |
|------|----------|-----------------------------------|-------------------|
| | B curve | Nominal rating I _n (A) | Number of modules |
| 12 | 4 191 33 | 6 | 1 |
| 12 | 4 191 34 | 10 | 1 |
| 12 | 4 191 35 | 13 | 1 |
| 12 | 4 191 36 | 16 | 1 |
| 12 | 4 191 37 | 20 | 1 |
| 12 | 4 191 38 | 25 | 1 |
| 12 | 4 191 39 | 32 | 1 |
| 12 | 4 191 40 | 40 | 1 |
| 12 | 4 191 41 | 50 | 1 |
| 12 | 4 191 42 | 63 | 1 |

| Pack | Cat.Nos | 2-pole 230/400 V \sim | |
|------|----------|-----------------------------------|-------------------|
| | B curve | Nominal rating I _n (A) | Number of modules |
| 6 | 4 191 55 | 6 | 2 |
| 6 | 4 191 56 | 10 | 2 |
| 6 | 4 191 57 | 13 | 2 |
| 6 | 4 191 58 | 16 | 2 |
| 6 | 4 191 59 | 20 | 2 |
| 6 | 4 191 60 | 25 | 2 |
| 6 | 4 191 61 | 32 | 2 |
| 6 | 4 191 62 | 40 | 2 |
| 6 | 4 191 63 | 50 | 2 |
| 6 | 4 191 64 | 63 | 2 |

| Pack | Cat.Nos | 3-pole 400 V \sim | |
|------|----------|-----------------------------------|-------------------|
| | B curve | Nominal rating I _n (A) | Number of modules |
| 4 | 4 191 66 | 6 | 3 |
| 4 | 4 191 67 | 10 | 3 |
| 4 | 4 191 68 | 13 | 3 |
| 4 | 4 191 69 | 16 | 3 |
| 4 | 4 191 70 | 20 | 3 |
| 4 | 4 191 71 | 25 | 3 |
| 4 | 4 191 72 | 32 | 3 |
| 4 | 4 191 73 | 40 | 3 |
| 4 | 4 191 74 | 50 | 3 |
| 4 | 4 191 75 | 63 | 3 |

MCBs RX³ 6000

thermal magnetic MCBs from 6 A to 63 A - C curve

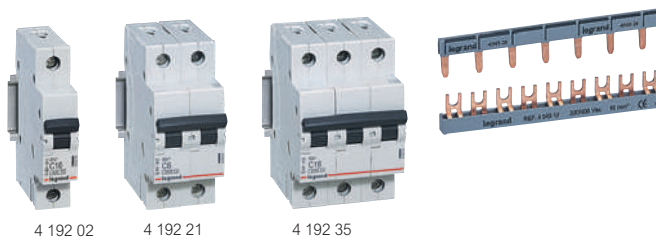

Technical characteristics [see e-catalogue](#)

Conform to IEC 60898-1
Do not accept auxiliaries, and add-on modules
Compatible with prong-type and fork type supply busbars
Breaking capacity:
6000 - IEC 60898-1 - 230/400 V \sim
6 kA - IEC 60947-2 - 230/400 V \sim
10000 - IEC 60898-1 - 127/220 V \sim
10 kA - IEC 60947-2 - 127/220 V \sim

| Pack | Cat.Nos | Single pole 230/400 V \sim | |
|------|----------|-----------------------------------|-------------------|
| | C curve | Nominal rating I _n (A) | Number of modules |
| 12 | 4 191 99 | 6 | 1 |
| 12 | 4 192 00 | 10 | 1 |
| 12 | 4 192 01 | 13 | 1 |
| 12 | 4 192 02 | 16 | 1 |
| 12 | 4 192 03 | 20 | 1 |
| 12 | 4 192 04 | 25 | 1 |
| 12 | 4 192 05 | 32 | 1 |
| 12 | 4 192 06 | 40 | 1 |
| 12 | 4 192 07 | 50 | 1 |
| 12 | 4 192 08 | 63 | 1 |

| Pack | Cat.Nos | 2-pole 230/400 V \sim | |
|------|----------|-----------------------------------|-------------------|
| | C curve | Nominal rating I _n (A) | Number of modules |
| 6 | 4 192 21 | 6 | 2 |
| 6 | 4 192 22 | 10 | 2 |
| 6 | 4 192 23 | 13 | 2 |
| 6 | 4 192 24 | 16 | 2 |
| 6 | 4 192 25 | 20 | 2 |
| 6 | 4 192 26 | 25 | 2 |
| 6 | 4 192 27 | 32 | 2 |
| 6 | 4 192 28 | 40 | 2 |
| 6 | 4 192 29 | 50 | 2 |
| 6 | 4 192 30 | 63 | 2 |

| Pack | Cat.Nos | 3-pole 400 V \sim | |
|------|----------|-----------------------------------|-------------------|
| | C curve | Nominal rating I _n (A) | Number of modules |
| 4 | 4 192 32 | 6 | 3 |
| 4 | 4 192 33 | 10 | 3 |
| 4 | 4 192 34 | 13 | 3 |
| 4 | 4 192 35 | 16 | 3 |
| 4 | 4 192 36 | 20 | 3 |
| 4 | 4 192 37 | 25 | 3 |
| 4 | 4 192 38 | 32 | 3 |
| 4 | 4 192 39 | 40 | 3 |
| 4 | 4 192 40 | 50 | 3 |
| 4 | 4 192 41 | 63 | 3 |

| Pack | Cat.Nos | 4-pole 400 V \sim | |
|------|----------|-----------------------------------|-------------------|
| | C curve | Nominal rating I _n (A) | Number of modules |
| 3 | 4 192 55 | 10 | 4 |
| 3 | 4 192 56 | 13 | 4 |
| 3 | 4 192 57 | 16 | 4 |
| 3 | 4 192 58 | 20 | 4 |