


MCBs RX³ 6000

thermal magnetic MCBs from 6 A to 63 A - B curve

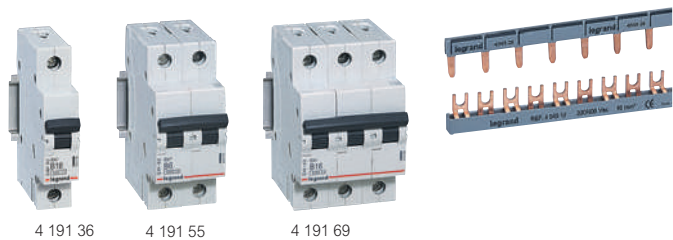

Technical characteristics [see e-catalogue](#)

Conform to IEC 60898-1
Do not accept auxiliaries, and add-on modules
Compatible with prong-type and fork type supply busbars
Breaking capacity:
6000 - IEC 60898-1 - 230/400 V~
6 kA - IEC 60947-2 - 230/400 V~
10000 - IEC 60898-1 - 127/220 V~
10 kA - IEC 60947-2 - 127/220 V~


Pack	Cat.Nos	Nominal rating I _n (A)	Number of modules
	B curve		
12	4 191 33	6	1
12	4 191 34	10	1
12	4 191 35	13	1
12	4 191 36	16	1
12	4 191 37	20	1
12	4 191 38	25	1
12	4 191 39	32	1
12	4 191 40	40	1
12	4 191 41	50	1
12	4 191 42	63	1

Pack	Cat.Nos	Nominal rating I _n (A)	Number of modules
	B curve		
6	4 191 55	6	2
6	4 191 56	10	2
6	4 191 57	13	2
6	4 191 58	16	2
6	4 191 59	20	2
6	4 191 60	25	2
6	4 191 61	32	2
6	4 191 62	40	2
6	4 191 63	50	2
6	4 191 64	63	2

Pack	Cat.Nos	Nominal rating I _n (A)	Number of modules
	B curve		
4	4 191 66	6	3
4	4 191 67	10	3
4	4 191 68	13	3
4	4 191 69	16	3
4	4 191 70	20	3
4	4 191 71	25	3
4	4 191 72	32	3
4	4 191 73	40	3
4	4 191 74	50	3
4	4 191 75	63	3

MCBs RX³ 6000

thermal magnetic MCBs from 6 A to 63 A - C curve

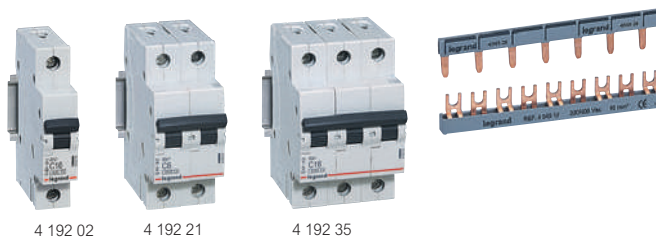

Technical characteristics [see e-catalogue](#)

Conform to IEC 60898-1
Do not accept auxiliaries, and add-on modules
Compatible with prong-type and fork type supply busbars
Breaking capacity:
6000 - IEC 60898-1 - 230/400 V~
6 kA - IEC 60947-2 - 230/400 V~
10000 - IEC 60898-1 - 127/220 V~
10 kA - IEC 60947-2 - 127/220 V~

Pack	Cat.Nos	Nominal rating I _n (A)	Number of modules
	C curve		
12	4 191 99	6	1
12	4 192 00	10	1
12	4 192 01	13	1
12	4 192 02	16	1
12	4 192 03	20	1
12	4 192 04	25	1
12	4 192 05	32	1
12	4 192 06	40	1
12	4 192 07	50	1
12	4 192 08	63	1

Pack	Cat.Nos	Nominal rating I _n (A)	Number of modules
	C curve		
6	4 192 21	6	2
6	4 192 22	10	2
6	4 192 23	13	2
6	4 192 24	16	2
6	4 192 25	20	2
6	4 192 26	25	2
6	4 192 27	32	2
6	4 192 28	40	2
6	4 192 29	50	2
6	4 192 30	63	2

Pack	Cat.Nos	Nominal rating I _n (A)	Number of modules
	C curve		
4	4 192 32	6	3
4	4 192 33	10	3
4	4 192 34	13	3
4	4 192 35	16	3
4	4 192 36	20	3
4	4 192 37	25	3
4	4 192 38	32	3
4	4 192 39	40	3
4	4 192 40	50	3
4	4 192 41	63	3

Pack	Cat.Nos	Nominal rating I _n (A)	Number of modules
	C curve		
3	4 192 55	10	4
3	4 192 56	13	4
3	4 192 57	16	4
3	4 192 58	20	4