

Satellite Splitter | 5-2400 MHz | 10.5 dB | Number of inputs: 1 | Number of outputs: 3 | Impedance: 75 Ohm | Silver

General information


3-way splitter in a zinc die-cast housing with satellite DC-power pass and with F-connectors to split a satellite-signal.

Specifications

Colour:	Silver
Impedance:	75 Ohm
Number of outputs:	3
Material:	Zinc
Number of inputs:	1
Satellite accessory type:	Splitter
Satellite frequency range:	5-2400 MHz
Insertion loss:	10.5 dB

Package contents

Splitter

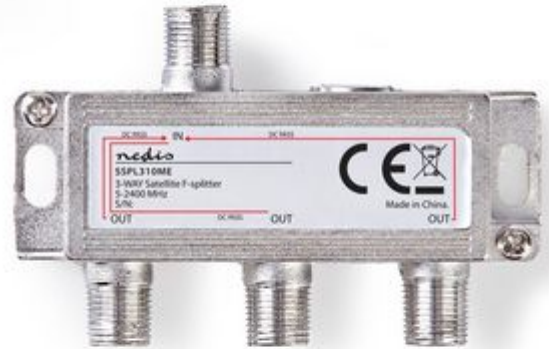

Sales information

Order code:	SSPL310ME
Product description:	Satellite Splitter 5-2400 MHz 10.5 dB Number of inputs: 1 Number of outputs: 3 Impedance: 75 Ohm Silver
Packaging:	Bulk
Brand name:	Nedis



Quantity	LxWxH (mm)			Weight
1	75 mm	50 mm	15 mm	48 g
100	240 mm	120 mm	325 mm	4940 g
200	255 mm	250 mm	340 mm	10260 g