

Multimode Relay MT

2 / 3 pole 10 A, DC- or AC-coil



F0161-A

Features

- 2 C/O or 3 C/O contacts
- Cadmium-free contacts
- DC and AC coils
- Mechanical indicator as standard
- Electrical indicator
- New test system with front operated finger protected push-to-test button and integral locking test tab
- White write on panel

Applications

Mechanical engineering, plant control



Technical data of approved types on request

Contact data

Configuration	2 C/O contact or 3 C/O contact	
Type of contact	single contacts	bifurcated contacts
Rated current	10 A	4 A
Rated voltage / max.breaking voltage AC	250 Vac / 440 Vac	
Maximum breaking capacity AC	2500 VA	500 VA
Make current (max. 4 s at duty cycle 10%)	20 A	8 A
Contact material	AgNi 90/10	
Minimum contact load	24 V, 10 mA / 20 mV, 1 mA gold plated	

Contact ratings

Type	Load	Operations	Standard
MT321	10 A, 250 Vac, C/O contact	1x10 ⁵	VDE 0435

Coil data

Nominal voltage	DC coil	6...220 Vdc
	AC coil	6...230 Vac
Nominal coil power	DC coil	typ. 1.2 W
	AC coil	typ. 2.3 VA
Operate category	1 / a	


Coil versions, DC-coil

Coil code standard	PD*	Nominal voltage Vdc	Pull-in voltage Vdc	Release voltage Vdc	Coil resistance Ω	Coil current mA
006	0A6	6	4.5	0.6	32±10%	187.5
012	0B2	12	9.0	1.2	110±10%	109.1
024	0C4	24	18.0	2.4	475±10%	50.5
048	0E8	48	36.0	4.8	2000±10%	24.0
060	0G0	60	45.0	6.0	2850±10%	21.1
110	1B0	110	82.5	11.5	10000±12%	11.0
220	2C0	220	165.0	22.0	40000±15%	5.5

All figures are given for coil without preenergization, at ambient temperature +20°C


* Protection diode PD; standard polarity: 2-pole relays: +2 / -7, 3-pole relays: +2 / -10

Max. DC load breaking capacity

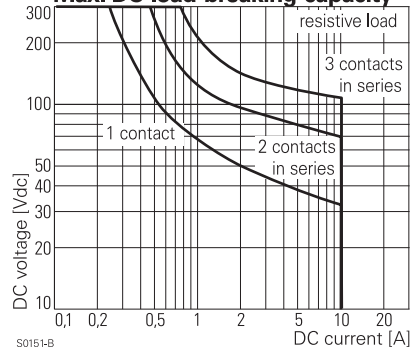


S0151-B

Electrical endurance

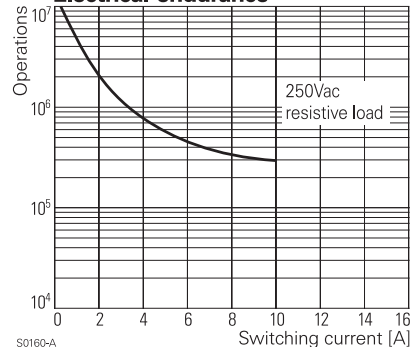

S0160-A

Coil operating range DC

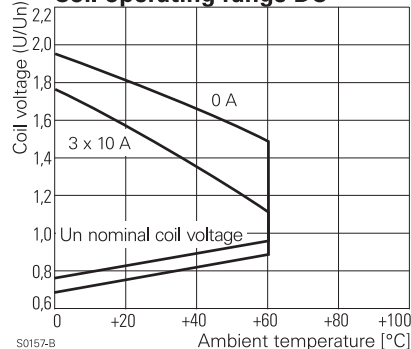

S0157-B

Multimode Relay MT

2 / 3 pole 10 A, DC- or AC-coil

Coil versions, AC-coil

Coil code	Nominal voltage Vac	Pull-in voltage Vac	Release voltage Vac	Maximum voltage Vac	Coil resistance Ω	Coil current mA
006	6	4.8	2.4	7.8	$5.3 \pm 10\%$	381.7
012	12	9.6	4.8	15.6	$24 \pm 10\%$	182.5
024	24	19.2	9.6	31.2	$86 \pm 10\%$	94.2
048	48	38.4	19.2	62.4	$345 \pm 10\%$	47.5
060	60	48.0	24.0	78.0	$544 \pm 10\%$	37.8
115	115	92.0	46.0	149.5	$2000 \pm 10\%$	20.6
230	230	184.0	92.0	299.0	$8300 \pm 12\%$	10.1

All figures are given for coil without preenergization, at ambient temperature +20°C


Insulation

Dielectric strength	coil-contacts	2500 V_{rms}
	open contact circuit	1500 V_{rms}
	adjacent contacts	2500 V_{rms}
Clearance / creepage		2.8 / 4 mm
Insulation to IEC 60664		
Voltage rating		250 V
Pollution degree		3
Overvoltage category		III
Insulation to VDE 0110b (2/79)		C / 250
Tracking resistance of relay base		CTI 175

Other data

Flammability class according to UL 94	V-0	
Ambient temperature	DC-coil	-45...+60 °C
	AC-coil	-45...+50 °C
Mechanical life	>20x10 ⁶ operations	
Max. switching rate at rated- / minimum load	20 min ⁻¹ / 100 min ⁻¹	
Operate- / release time	12 / 5 ms	
Bounce time	4 ms	
Vibration resistance N/O / N/C contact	>5 / 2 g	
Shock resistance (function) N/O contact / N/C contact	>50 / 10 g	
Category of protection (IEC 61810)	RT I - dust protected	
Relay weight	80 g	
Packaging unit	25 pcs.	
Accessories	see accessories MT	


Coil operating range AC

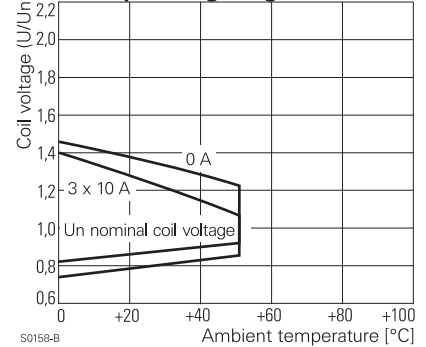

S0168-B

Terminal assignment

View on solder pins

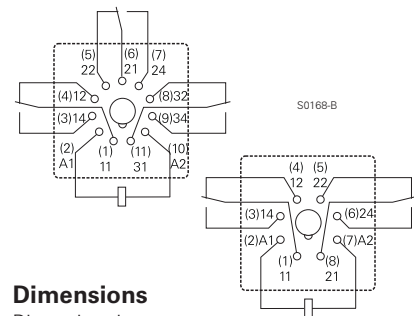


S0168-B

S0296-A

Dimensions

Dimensions in mm

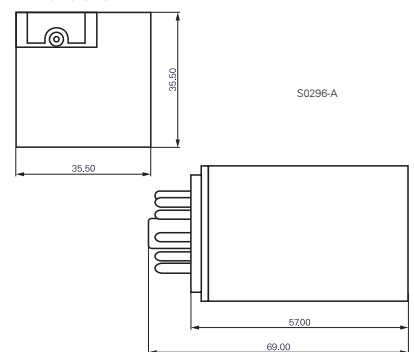

Product key

Type	M T					
Contact configuration	2	2 C/O contacts, 8-pole	3	3 C/O contacts, 11-pole		
Contact material	2	AgNi 90/10	B	AgNi 90/10, bifurcated contacts, gold plated		
	3	AgNi 90/10, gold plated				
Version	1	DC with test button	6	AC with test button		
	3	DC with test button and bipolar LED	8	AC with test button and LED		
Coil	Coil code: please refer to coil versions table, preferred types in bold print					
Other types on request						

Multimode Relay MT

2 / 3 pole 10 A, DC- or AC-coil

Product key	Contact configuration	Contact material	Version	Coil	Part number		
MT221012	2 C/O contacts 8 pole	AgNi 90/10	DC with test button	12 Vdc	4-1393090-9		
MT221024				24 Vdc	5-1393090-0		
MT221048			48 Vdc	5-1393090-1			
MT221060			60 Vdc	5-1393090-2			
MT221110			110 Vdc	5-1393090-3			
MT221220			220 Vdc	5-1393090-4			
MT223024			DC+LED+test button		AC test button	24 Vdc	5-1393090-7
MT226012						12 Vac	6-1393090-3
MT226024			24 Vac	6-1393090-4			
MT226048			48 Vac	6-1393090-5			
MT226115			115 Vac	6-1393090-7			
MT226230			230 Vac	6-1393090-8			
MT228024			AC+LED test button			24 Vac	6-1393090-9
MT228115						115 Vac	7-1393090-0
MT228230			230 Vac	7-1393090-1			
MT321012			3 C/O contacts 11 pole	AgNi 90/10	DC with test button	12 Vdc	6-1393091-8
MT321024						24 Vdc	7-1393091-0
MT321048					48 Vdc	7-1393091-1	
MT321060					60 Vdc	7-1393091-2	
MT321110					110 Vdc	7-1393091-4	
MT321220	220 Vdc	7-1393091-7					
MT323024	DC+LED+test button				AC test button	24 Vdc	8-1393091-4
MT3230C4						24 Vdc	7-1393091-9
MT326012	12 Vac	9-1393091-6					
MT326024	24 Vac	9-1393091-7					
MT326048	48 Vac	9-1393091-8					
MT326115	115 Vac	0-1393092-1					
MT326230	230 Vac	0-1393092-2					
MT328024	AC+LED test button					24 Vac	0-1393092-4
MT328115						115 Vac	0-1393092-7
MT328230	230 Vac	0-1393092-8					
MT331024		AgNi 90/10 gold plated			DC with test button	24 Vdc	1-1393092-1
MT331110						110 Vdc	1-1393092-3
MT331220					220 Vdc	1-1393092-5	
MT333024					DC+LED+test button		DC+LED test button
MT3330C4			24 Vdc	1-1393092-6			
MT333110			110 Vdc	2-1393092-0			
MT333220			220 Vdc	2-1393092-2			
MT336115			AC test button			115 Vac	2-1393092-5
MT336230						230 Vac	2-1393092-6
MT338024			AC+LED			24 Vac	2-1393092-7
MT338115			test button			115 Vac	8-1415025-1
MT338230						230 Vac	2-1393092-8