Motion detector - Professional Line

IS 2360 DE ECO

white
EAN 4007841 034733
Article number 034733

steinel

infrared sensor 360°	max. 4 m	1000 W max. (LED-ready)	IP54	2 - 2000 lux	8 sec - 35 min	energy saving	5 years manufacturer's warranty steinel-professional.de/garantie	CE

Function description

Intelligent technology for installation. Infrared wall sensor IS 2360 DE ECO, for indoors and out, ideal for installing in projecting roofs and suspended ceilings, 360° angle of coverage, reach can be set up to 4 m, selectable time and twilight threshold, detection zone can be customised with shrouds.

IS 2360 DE ECO

white
EAN 4007841 034733
Article number 034733

Technical specifications

Type	Motion detectors	Fluorescent lamps, series-corrected	406 VA
Dimensions (Ø x H)	78 x 89 mm	Fluorescent lamps, parallel-corrected	406 VA
Mains power supply	220 – 240 V / 50 – 60 Hz	Switching output 1, low-voltage halogen lamps	1000 VA
Sensor Technology	passive infrared	LED lamps	16 W
Application, place	Outdoors, Indoors	LED lamps > 2 W	64 W
Installation site	ceiling	LED lamps > 8 W	64 W
Installation	In-ceiling installation	Capacitive load in µF	132 µF
Mounting height	2,2 – 4 m	Constant-lighting control	No
Reach, radial	Ø 4 m (13 m^2)	Basic light level function	No
Reach, tangential	Ø 8 m (50 m^2)	Settings via	Potentiometers
Detection angle	360 °	With remote control	No
Angle of aperture	180 °	Interconnection	Yes
Optimum mounting height	2,5 m	Type of interconnection	Master/master
Mechanical scalability	No	IP-rating	IP54
Sneak-by guard	Yes	Material	Plastic
Capability of masking out individual segments	Yes	Ambient temperature	-20 – 40 °C
Electronic scalability	No	Application, room	corridor / aisle, changing room, function room / ancillary room, kitchenette, stairwell, WC / washroom, outdoors, front door, all round the building, terrace / balcony, Indoors
Twilight setting TEACH	No		
Twilight setting	2 – 2000 lx		
Time setting	8 s – 35 Min.		
Output	1000 W	Colour	white
Switching output 1, number of LEDs / fluorescent lamps	6 pcs.	Colour, RAL	9010
		IDs, certificates	VDE
Fluorescent lamps, electronic ballast	430 W	Manufacturer's Warranty	5 years
Fluorescent lamps, uncorrected	500 VA	Version	white
		PU1, EAN	4007841034733

IS 2360 DE ECO

white
EAN 4007841 034733
Article number 034733
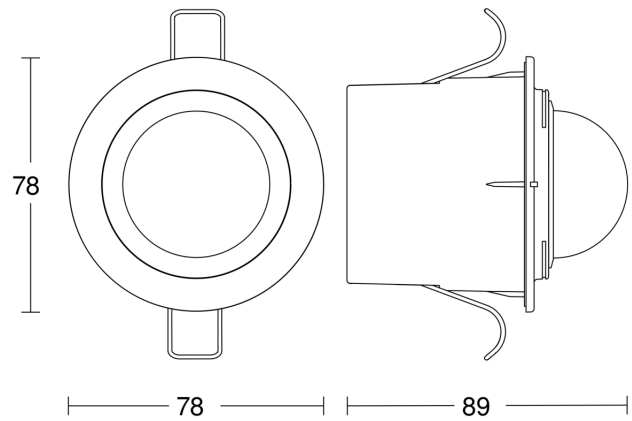
steinel

Detection Zone

● 2,5 m

{a1695}

{a1707}
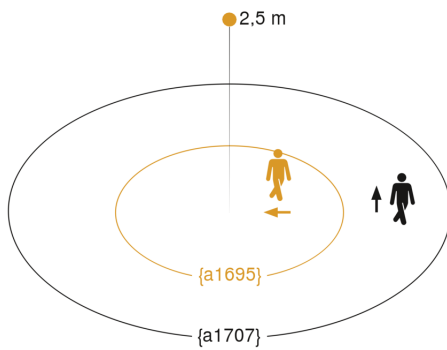
Mögliche Montagehöhe: 2,20 m – 4,00 m
Orange: radial
Schwarz: tangential

Dimension Drawing

78

78

89

Circuit diagram

L N L´ ⊕

L

N

PE ⊕