


L:14F,18F,22F,38F

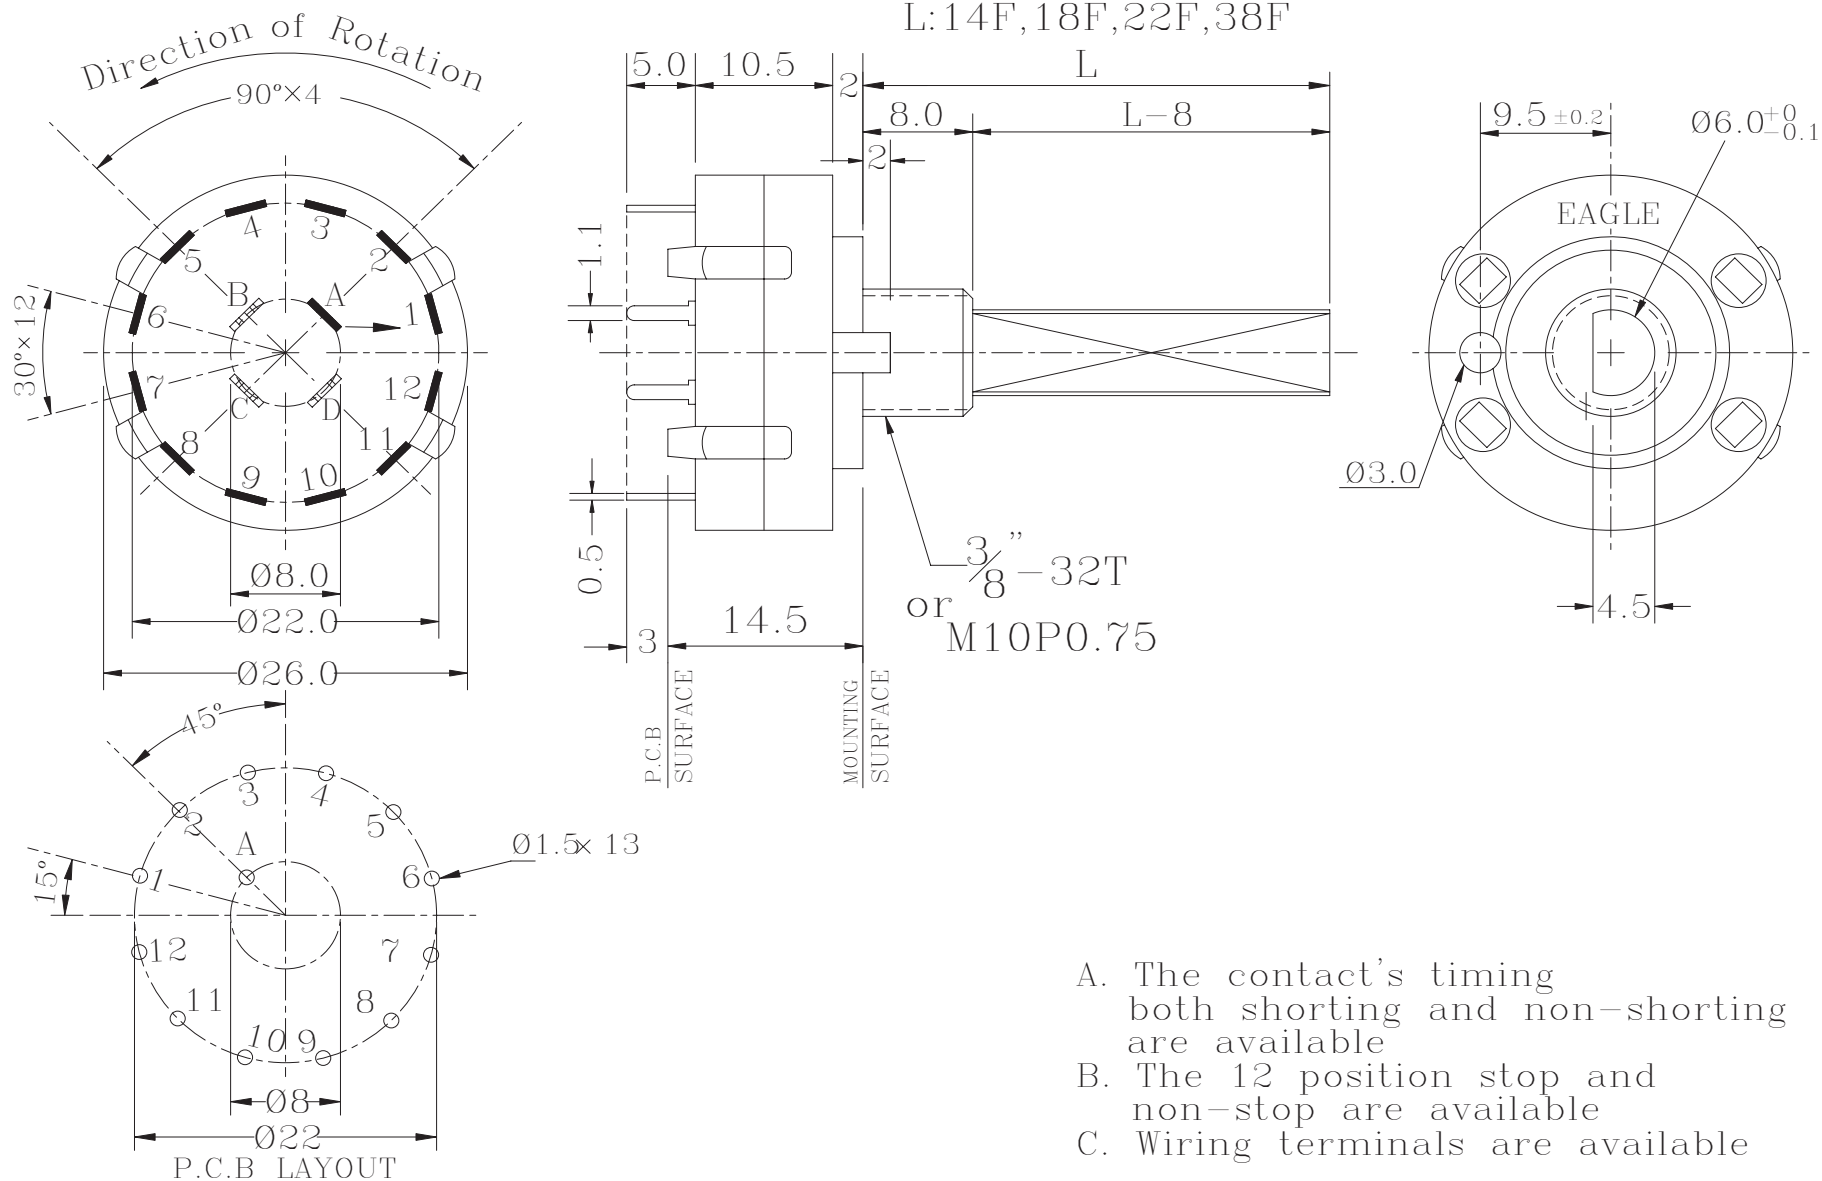

- A. The contact's timing both shorting and non-shorting are available
- B. The 12 position stop and non-stop are available
- C. Wiring terminals are available

| REVISION                                                                                      | DESCRIPTION | REVISED BY | TOLEANCES .X ± 0.5 .XX |       | ANGLE ½°    |      |  |  | UNIT | mm | PART NAME | SR26 SPEC DRAWING<br>(index 30 degrees) | DWG NO  |
|-----------------------------------------------------------------------------------------------|-------------|------------|------------------------|-------|-------------|------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|------|----|-----------|-----------------------------------------|---------|
|             |             |            | DRAWN BY               | Alice | DESIGNED BY | Eric | SCALE                                                                                 |                                                                                       |      |    |           |                                         | PART NO |
|             |             |            | CHECKED BY             |       | APPROVED BY |      | DATE                                                                                  | 2006.05.09                                                                            |      |    |           |                                         |         |
|  2006.05.09 | 換新圖框, 重新出圖  | 吳美玉        |                        |       |             |      |                                                                                       |                                                                                       |      |    |           |                                         |         |