

	M18x1, D	M30x1,5	
	0..0,3 m	0..0,5 m	0..0,5 m

: _____ - 2m 4 x 0.14 mm²
- 12

	M18x1	M30x1,5	50	51	52C	53
	ODD18	ODD30	ODD50	ODD51	ODD52	ODD53
L 1	78	80	-	67	50	-
L 2	55	55	-	22	30	-
L 3	-	-	65	33	-	40
B	-	-	22	22	40	12
H	-	-	45	75	120	32

M

!
!

!
M18x1 - 40Nm, M30x1.5 - 40Nm.


- 1.5Nm.

:
25..+ 55 °C, RH 85%
IP 65
10...55 Hz 0.35 mm
49m/s2 (5g)

ODD53, ODD50X311x, ODD51X311x

PUR

ODD53X31xxL


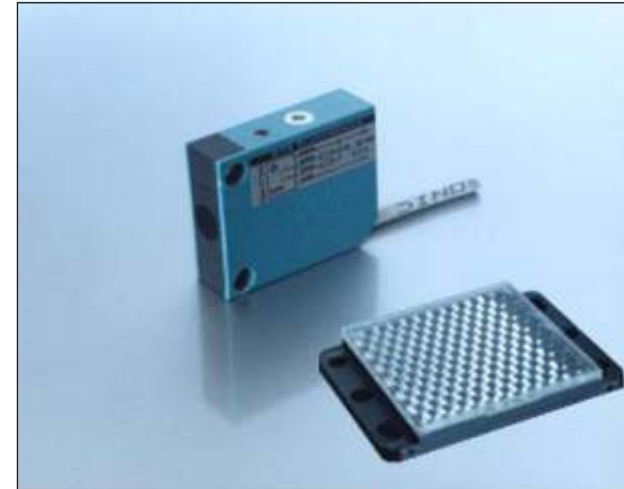


ODD53


: “ ” “ ”

12...24 V (10...30V) DC
200 mA DC
40 mA
100Hz
5000Lx


>10 / 500V
-10...+ 55 °C
RH85%,

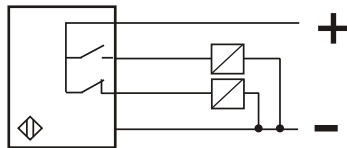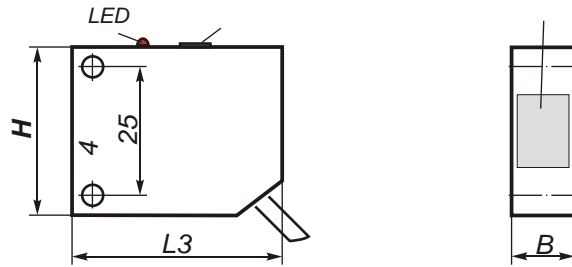


PNP NO+NC
ODDxxP31xL

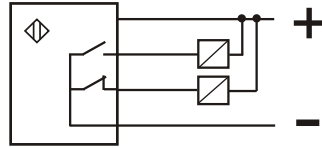

NPN NO+NC
ODDxxN31xL

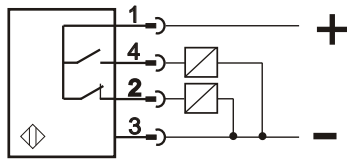

PNP NO+NC
ODDxxP311CL

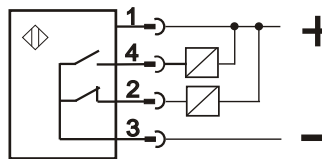

NPN NO+NC
ODDxxN311CL

