




Part Number: **MS-157125-2**
Revision 20140225 - Generated 12-Mar-2014

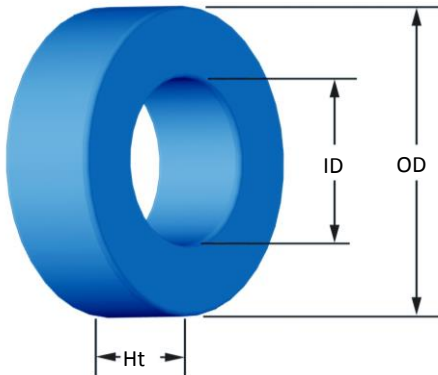

| | | | |
|-----------------------------|--|------------------------|----------|
| OD | (nom. - bare core) | 39.88 mm | 1.570 in |
| | (max. - after coating) | 40.69 mm | 1.602 in |
| ID | (nom. - bare core) | 24.13 mm | 0.950 in |
| | (min. - after coating) | 23.32 mm | 0.918 in |
| Ht | (nom. - bare core) | 14.48 mm | 0.570 in |
| | (max. - after coating) | 15.37 mm | 0.605 in |
| Mass | (approximate) | 63 grams | |
| Magnetic Dimensions | A_e - Eff. Mag. Cross Section | 1.07 cm ² | |
| | L_e - Eff. Mag. Path Length | 9.85 cm | |
| | V_e - Eff. Core Volume | 10.5 cm ³ | |
| | WA - Min. Eff. Window Area | 4.27 cm ² | |
| | sa - Surface Area | 60.2 cm ² | |
| | mlt - mean length per turn | 5.98 cm | |
| Inductance | μ_i (reference) | 125 | |
| | A_L value (nominal) | 168 nH/N ² | |
| | Test Winding | N=70, #20 AWG | |
| | Frequency | 10 kHz | |
| | Voltage on Agilent 4284A | 0.33 V | |
| | AL tolerance | ±8% | |
| Core Loss | $\text{Core Loss (mW/cm}^3\text{)} = \frac{f}{\frac{a}{B_{pk}^3} + \frac{b}{B_{pk}^{2.3}} + \frac{c}{B_{pk}^{1.65}}} + d \cdot B_{pk}^2 \cdot f^2$ | | |
| | where B_{pk} expressed in gauss, f expressed in hertz, and: $a=1.394E+10$, $b=1.034E+09$, $c=1.244E+07$, $d=4.007E-14$ | | |
| | B_{pk} | 1000 G | |
| | frequency | 50 kHz | |
| | Core Loss (nominal) | 276 mW/cm ³ | |
| Core Loss (maximum) | 318 mW/cm ³ | | |
| DC Saturation | $\% \mu_i = \frac{1}{a + b \cdot H^c} + d$ | | |
| | where H expressed in oersteds, and: $a=1.000E-02$, $b=7.884E-06$, $c=1.883$, $d=0.000$ | | |
| | H_{DC} | 40 Oe | |
| | Percent Initial Perm.(nom.) | 55.0% | |
| Percent Initial Perm.(min.) | 46.4% | | |
| Coating/Pkg | Coating Type: | Blue Epoxy | |
| | Voltage Breakdown (min.) | 1000 Vrms | |
| | Limit | 0.1 mA, 5 s | |
| | Package Quantity | 216 Pcs/Box | |

| | | | | | | | | | | | | | |
|----------------------|---------------------|--------|-------|--------|--------|---------|---------|---------|---------|---------|---------|-------|-------|
| Winding Table | Wire Size | AWG | 8 | 10 | 12 | 14 | 16 | 18 | 20 | 22 | 24 | 26 | 28 |
| | | mm | 3.150 | 2.500 | 2.000 | 1.600 | 1.250 | 1.000 | 0.800 | 0.630 | 0.500 | 0.400 | 0.315 |
| | Single Layer | Turns | 17 | 22 | 28 | 35 | 45 | 56 | 70 | 88 | 111 | 138 | 173 |
| | | Rdc(Ω) | 2.1 m | 4.3 m | 8.7 m | 17.3 m | 35.4 m | 70.0 m | 139.2 m | 278.3 m | 558.3 m | 1.1 | 2.2 |
| Full Winding | Turns | 22 | 35 | 54 | 83 | 128 | 199 | 307 | 476 | 736 | 1,139 | 1,764 | |
| | Rdc(Ω) | 2.7 m | 6.8 m | 16.8 m | 41.0 m | 100.6 m | 248.8 m | 610.5 m | 1.5 | 3.7 | 9.1 | 22.4 | |

