



1 2 3 4 5 6 7

FOR 客户名称	APPROVED 客户确认签字	ATTN 销售负责人

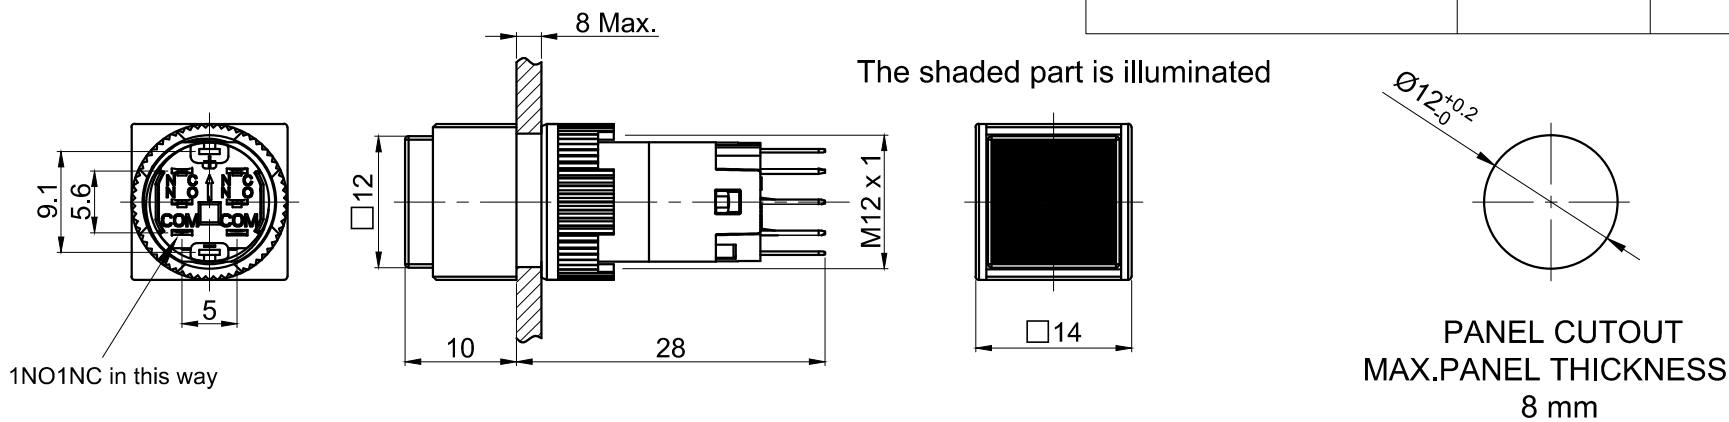

The shaded part is illuminated



Contact Composition

Part Number: LAS2F-□■/△/▲/◎

□	Contact structure	△	Cap or Lamp Color	▲	Lamp Voltage	◎	IP class
11	1NO1NC	R	Red	6V	AC/DC 6V	No Letter	IP40
22	2NO2NC	G	Green	12V	AC/DC 12V	FP	IP67
■	Operation mode	Y	Yellow	24V	AC/DC 24V		
No Letter	Momentary	B	Blue	110V	AC/DC 110V (External resistor)		
Z	Latching	W	White	220V	AC/DC 220V (External resistor)		
Other voltage can be made to order							

**SPECIFICATIONS:**

- Switch Rating: AC220V/0.5A, DC220V/0.1A.
- Mechanical Life: Momentary ≥200,000cycles  
Latching ≥100,000cycles.
- Electrical Life: ≥50,000cycles.
- Contact Resistance: ≤50mΩ.
- Insulation Resistance: ≥100MΩ.
- Dielectric Strength:  
Between contact and lamp terminals: AC1,500V, RMS 50Hz, 1min;  
Between terminals of the same pole: AC 1,500V, RMS 50Hz, 1min;  
Between terminals of different pole: AC 2,000V, RMS 50Hz, 1min.
- Operating Temperature: -25°C ~ +55°C (No Freezing).
- Operating Force: About 1.4N(1NO1NC), About 2N(2NO2NC).
- Terminal Type: Pin Terminal(1.8 x 0.4mm).
- IP Class: IP40, IP67(with a seal).

**MATERIALS:**

- Contact: Silver alloy.
- Button: PC.
- Body: PC.
- Base: PA.

BRAND 品牌 <b>ONPOW</b>	<b>红波按钮制造有限公司</b> ONPOW PUSH BUTTON MANUFACTURE CO.,LTD.		
	USED 用途	APPD 审核 CH 2019/06/10	CHKD 校对 NCH 2019/06/10
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ONPOW PUSH BUTTON MANUFACTURE CO.,LTD. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ONPOW PUSH BUTTON MANUFACTURE CO.,LTD.	FINISH 处理	SCALE 比例 1.5 / 1	UNIT 单位 mm
DIMENSIONS 0.00 TO 18.00mm 18.01 TO 30.00mm 30.01 TO 50.00mm 50.01 TO 80.00mm	TOLERANCE ±0.43mm ±0.52mm ±0.62mm ±0.74mm	TITLE 名称 LAS2 Series Pushbutton Switches	DR. 制图 ZPD 2019/06/10
DWG NO. 图号 LAS2F带灯	FILE NAME 档案名称 LAS2F.DWG	SHEET 张 1 / 1	SIZE 图纸 A4
REV. 更改 1	SHEET 1 / 1		

1 2 3 4 5 6 7