


© MPE-GARRY


Sandwich pin headers 2,54 mm pitch and 0,64 mm square pins. Many different pin length and plating options as standard. Special pin lengths are available on request. Customized connectors possible.

Pitch (mm)	2,54
Mating contact size	sq. 0,64
No of contacts	20
Polarising	No
Locking	No
Material contact	Copper alloy
Plating contact	Sn
Material insulator	High temp. thermoplast UL94V-0
Rated current	3,0 A
Rated voltage	250 V <sub>RMS</sub> / V <sub>DC</sub> Please consider air- and creepage distances
Withstand voltage	500 V <sub>RMS</sub> for 1 minute
Operating temperature	-40°C to +105°C
Max. processing temper.	260°C for 10 seconds
Packaging	Standard
A (Length)	29,00
B (Mating)	5,70
C (PCB side)	3,30
L	20,00

Single row pinheader.

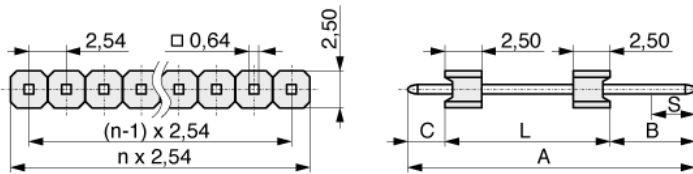

Footprint



MPE Garry GmbH  
Schäfflerstraße 13  
87629 Füssen/Germany

Phone: +49 (0) 83 62 / 91 56-0  
Fax: +49 (0) 83 62 / 91 56-500  
Email: [vk@mpe-connector.de](mailto:vk@mpe-connector.de)