

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJC 05/19/07'		

Table A:





Positions	A	B	C	D
10	17.16	10.16	10.60	7.62
14	22.24	15.24	10.60	7.62
16	24.78	17.78	10.60	7.62
18	27.32	20.32	10.60	7.62
20	29.86	22.86	10.60	7.62
24	34.94	27.94	18.18	15.24
28	40.02	33.02	18.18	15.24
40	55.26	48.26	18.18	15.24

NOTES:

- MATERIAL
  - INSULATOR:THERMOPLASTIC(UL 94V-0).
  - CONTACT: COPPER ALLOY.
- SPECIFICATION
  - STORAGE TEMPERATURE:-40~+105°C.
  - CONTACT RESISTANCE:20mΩ max.(initial).
  - INSULATION RESISTANCE:1000MΩ min.
  - DIELECTRIC WITHSTANDING VOLTAGE:AC 500V PER MINUTE.
- PRODUCT NUMBER CODE:
 

DS1019 - X X X X

  - CONTACT POSITIONS
    - A: A TYPE
    - B: B TYPE
  - CONTACT PLATING
    - Si: SELECTIVE GOLD FLASH
    - 8: FULL GOLD FLASH
    - 2: Gold + Nickel
    - T: Tin
  - HOUSING COLOR
    - B: BLACK
  - WIDTH
    - N: 7.62mm
    - W: 15.24mm
  - No. OF CONTACTS
    - 10 14 16 18
    - 20 24 28 40

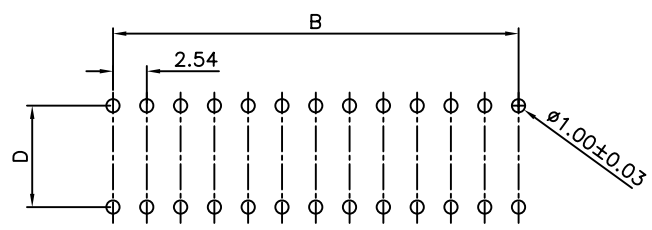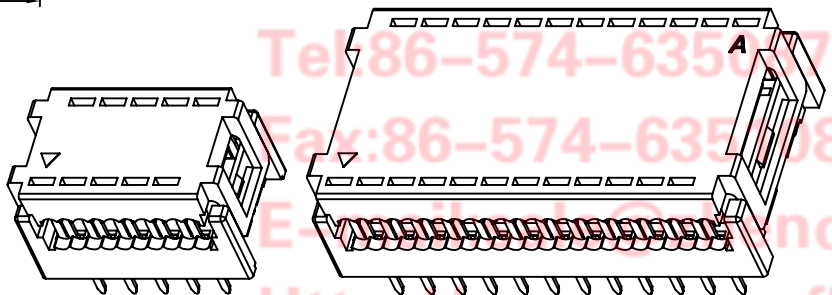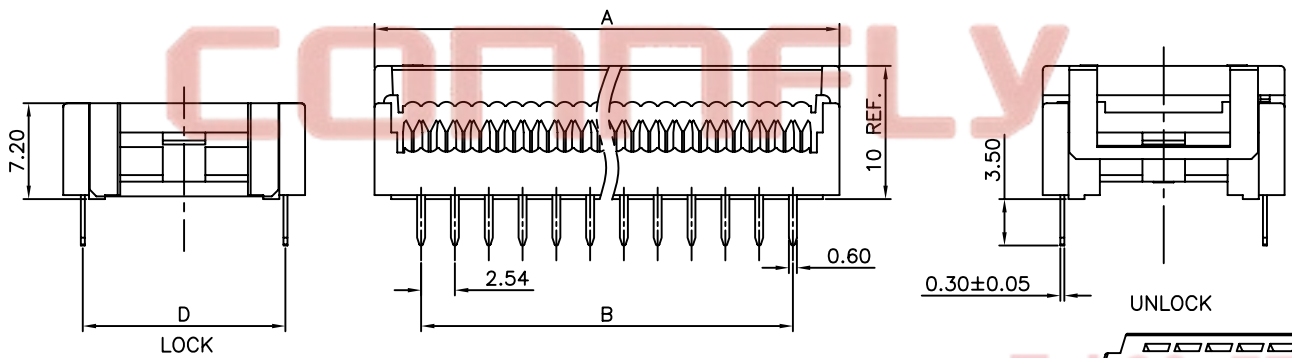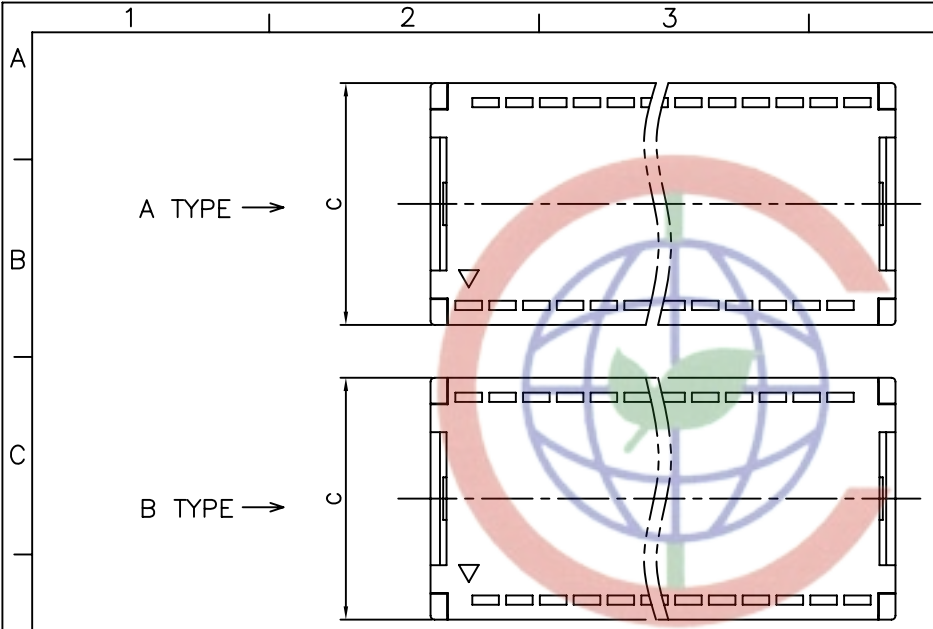

RECOMMEND PCB LAYOUT  
(TOLERANCE=±0.05)

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	TITLE
X. ±0.60	X. ±5°	UNITS mm	DIP PLUG CONNECTOR PITCH 2.54mm
.X ±0.38	.X ±3°	SHEET SIZE A4	SERIES DS1019 SERIES
.XX ±0.25	.XX ±2°		
DRAWING TYPE	CUSTOMER	<b>晨翔电子有限公司</b> <b>CONNFLY CONNFLY ELECTRONIC CO. LTD</b>	
SCALE	1:1 SHEET 1 OF 1		
DRAWING NO.	C-DS1019-XXXXX		

Tel: 86-574-6350787  
 Fax: 86-574-6350817  
 E-mail: connfly@connfly.com.cn  
 Http://www.connfly.com  
 Add: East China Industrial Zone, SongYan Town, Ningbo City, Zhejiang Province, China  
 P.C: 315333