


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 09/25/06'		

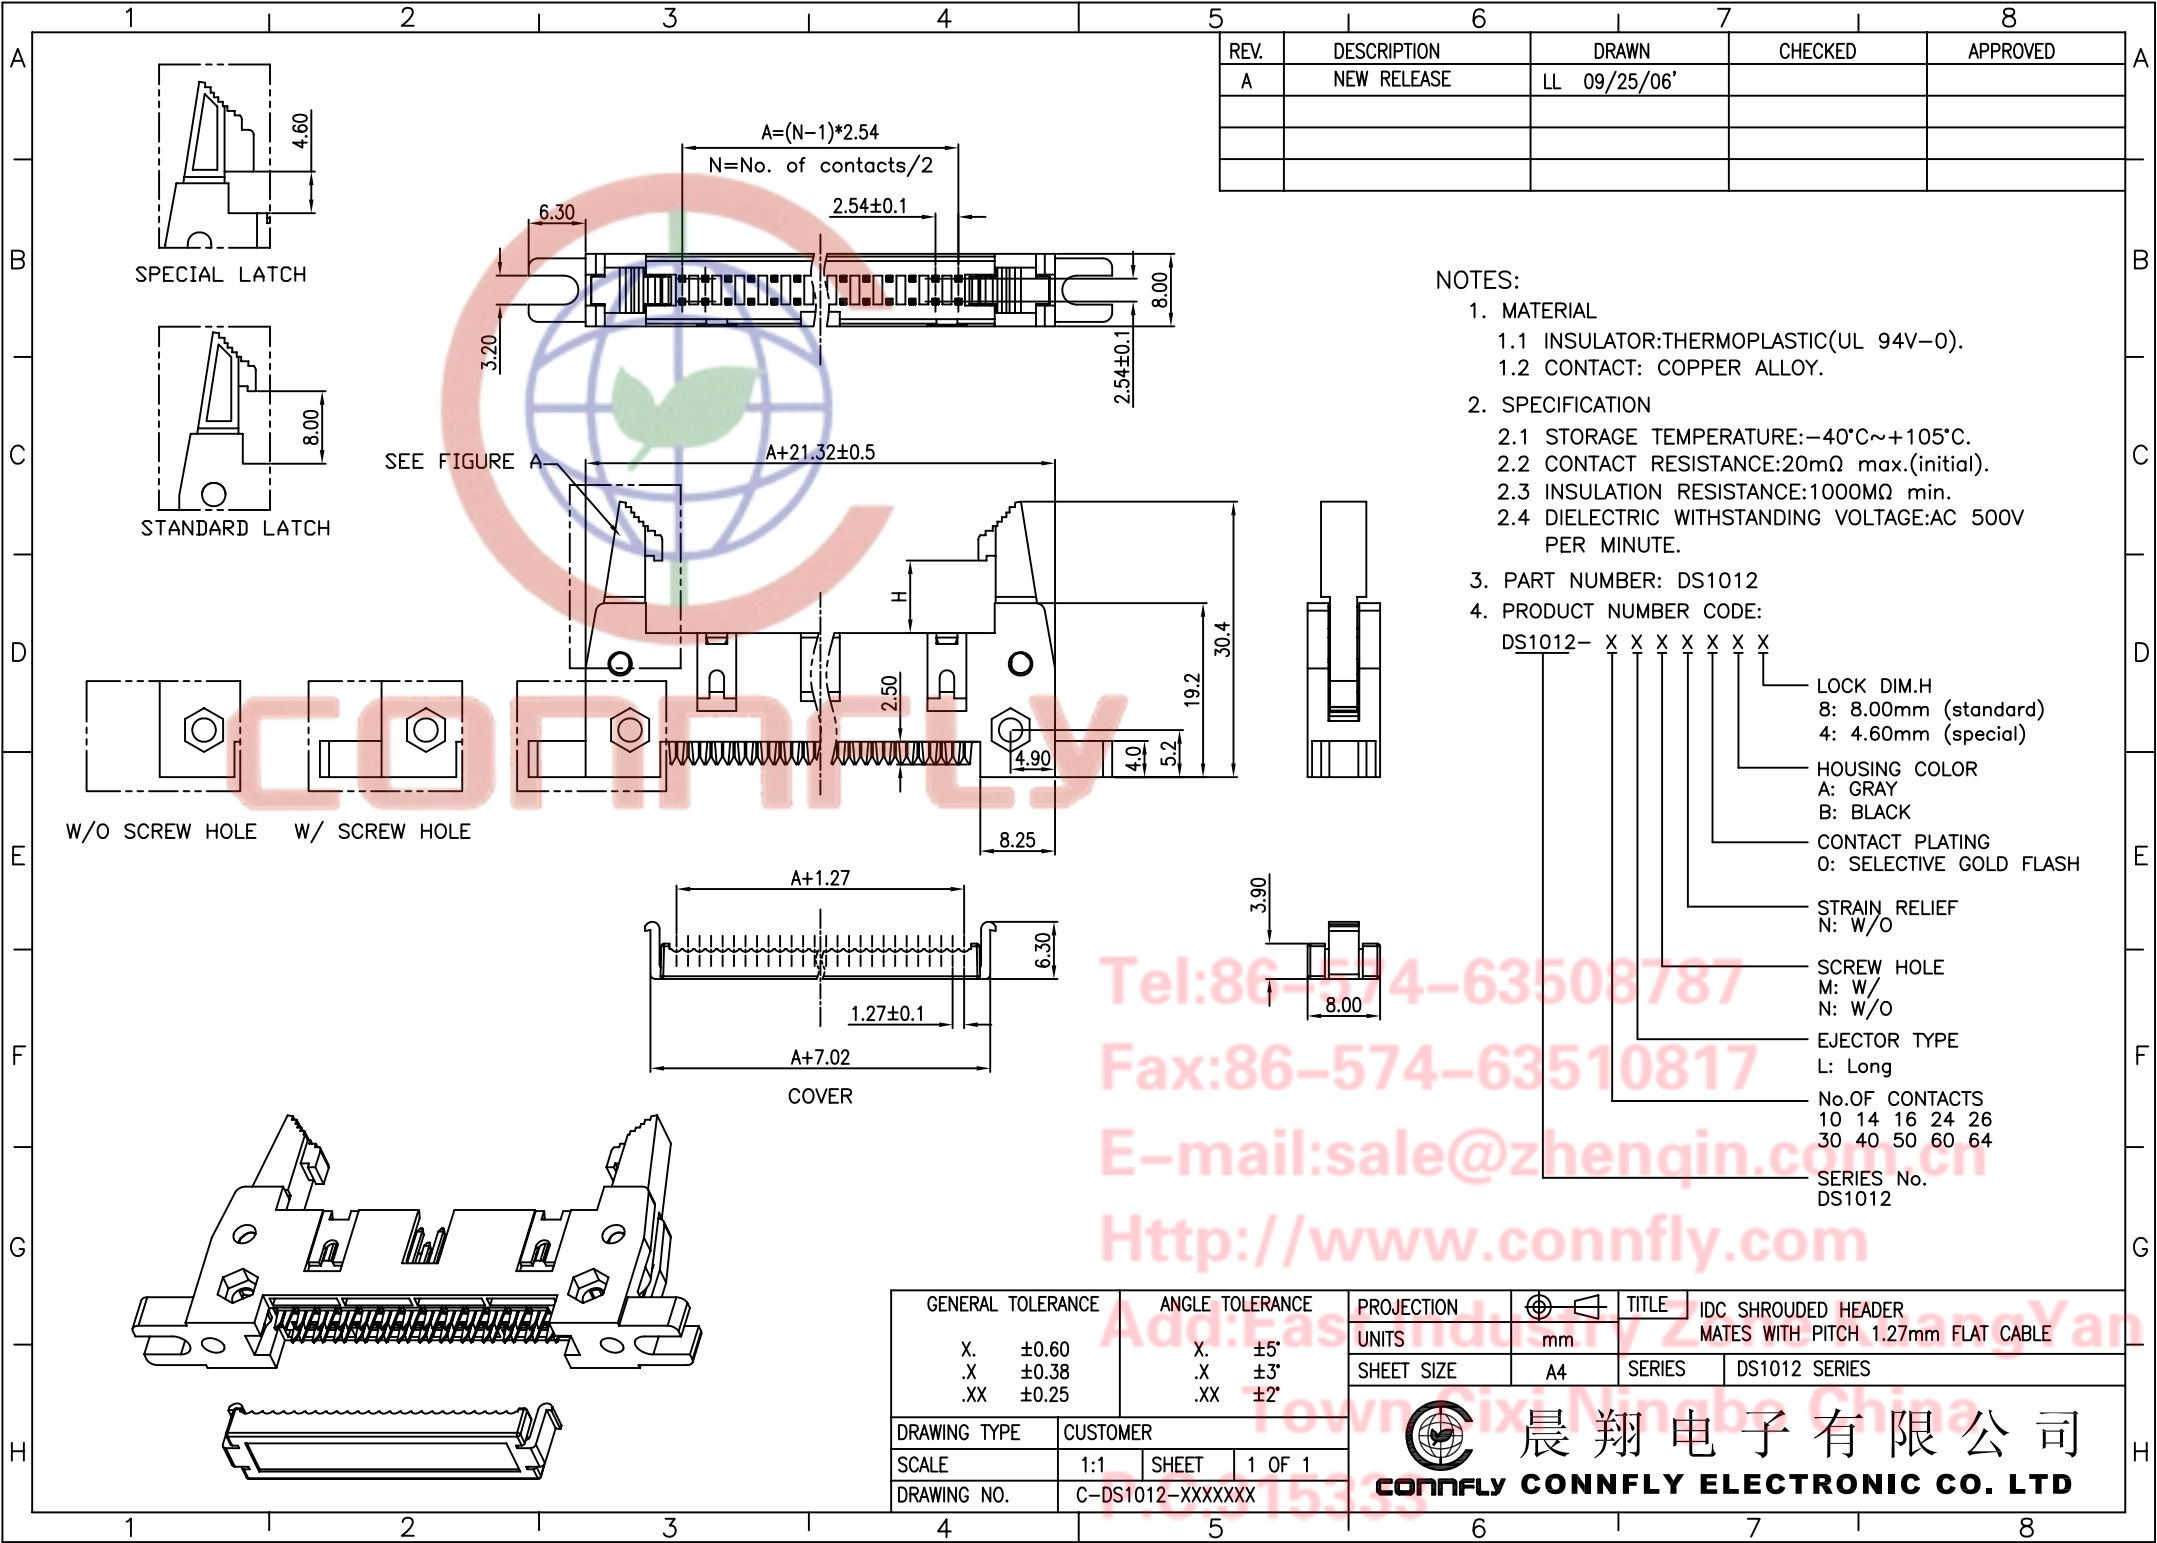

- NOTES:
- MATERIAL
 - INSULATOR: THERMOPLASTIC (UL 94V-0).
 - CONTACT: COPPER ALLOY.
 - SPECIFICATION
 - STORAGE TEMPERATURE: -40°C ~ +105°C.
 - CONTACT RESISTANCE: 20mΩ max. (initial).
 - INSULATION RESISTANCE: 1000MΩ min.
 - DIELECTRIC WITHSTANDING VOLTAGE: AC 500V PER MINUTE.
 - PART NUMBER: DS1012
 - PRODUCT NUMBER CODE:

DS1012- X X X X X X

 - LOCK DIM.H: 8: 8.00mm (standard), 4: 4.60mm (special)
 - HOUSING COLOR: A: GRAY, B: BLACK
 - CONTACT PLATING: 0: SELECTIVE GOLD FLASH
 - STRAIN RELIEF: N: W/O
 - SCREW HOLE: M: W/, N: W/O
 - EJECTOR TYPE: L: Long
 - No. OF CONTACTS: 10 14 16 24 26 30 40 50 60 64
 - SERIES No.: DS1012

Tel: 86-574-63508787
 Fax: 86-574-63510817
 E-mail: sale@zhengqin.com.cn
 Http://www.connfly.com

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE
.X	±0.60	.X	±5°	mm	IDC SHROUDED HEADER
.X	±0.38	.X	±3°		MATES WITH PITCH 1.27mm FLAT CABLE
.XX	±0.25	.XX	±2°		
DRAWING TYPE		CUSTOMER		SHEET SIZE	SERIES
SCALE		1:1		A4	DS1012 SERIES
DRAWING NO.		C-DS1012-XXXXXXX		SHEET 1 OF 1	

晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD