
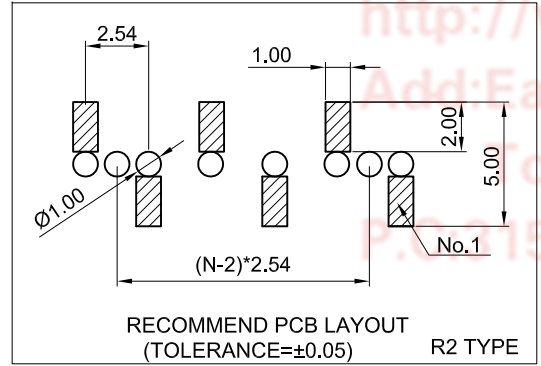
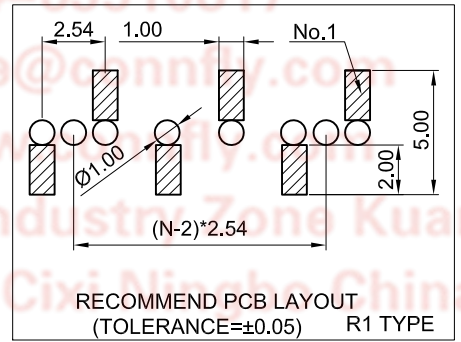
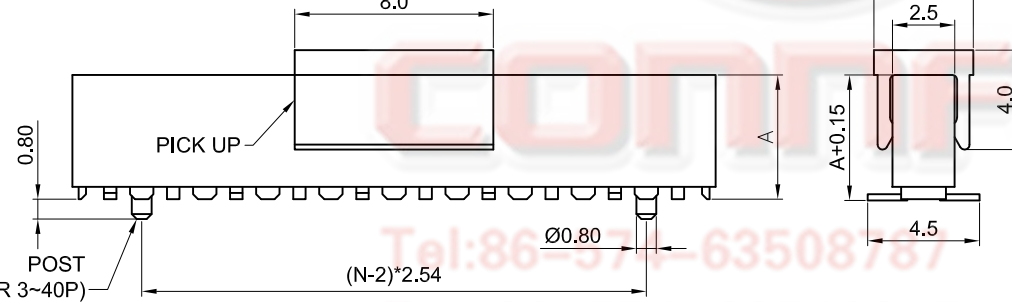
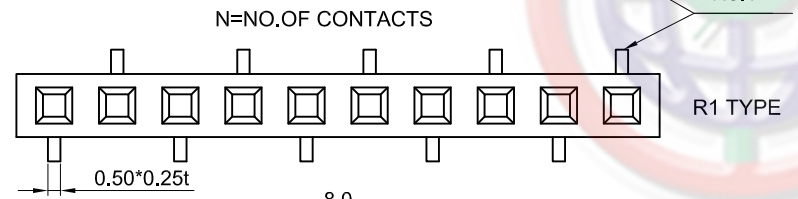


Dept  
Qty  
DC 1  
ED 1  
IE 1  
ISO 1  
PD 1  
R&D 1  
SD 1  
QA 1  
QC 1  
QE 1

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

1 2 3 4 5 6 7 8

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ych 01/24/08'	~	LJC 01/24/08'
C	DRAWING UPDATE	JLZ 01/05/19'	~	

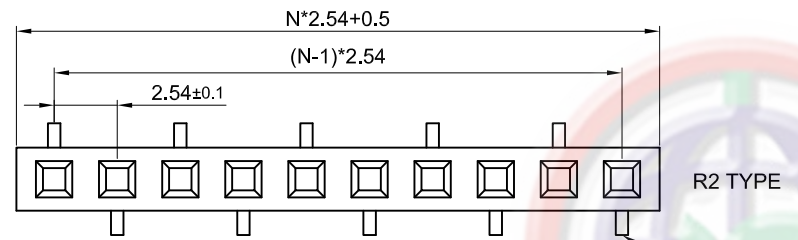

Notes:

Specifications:

- Contact Resistance: 20mΩ Max.
- Insulation Resistance: 1000MΩ Min.
- Dielectric Withstanding Voltage: 600V AC(rms) For 1 Minute.
- Current Rating:3A.
- Voltage Rating:250V AC rms.
- Temperature: -40°C~+105°C.

Materials:

- Contact Material: Copper Alloy.
- Contact Plating: Gold Plating Over Nickel.
- Insulator Materials: High Temp,Black,UL94-V0.

Product Number Code:

DS1023-16 - X X X X X X X X

- PROFILE HEIGHT(DIM A)  
1: 8.5mm  
2: 5.0mm  
3: 5.7mm
- POST SUPPORT  
S:W/ POST  
X:W/O POST
- PACKING TYPE  
T:TRAY  
R:TAPE ON REEL  
B:TUBE
- PICK UP SUPPORT  
S:W/ PICK UP  
X:W/O PICK UP
- BEND TYPE  
1:R1 TYPE  
2:R2 TYPE
- CONTACT PLATING  
8: FULL GOLD FLASH
- HOUSING COLOR  
B:BLACK
- No.OF CONTACTS  
1x2-1x40

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

PROJECTION	TITLE	FEMALE HEADER PITCH
UNITS	mm	2.54mm SMT TYPE H=8.5/5.0/5.7mm
SHEET SIZE	A4	SERIES DS1023-16 SERIES

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1023-16-XXXXXXX-C		



**晨翔电子有限公司**  
**CONNFLY CONNELY ELECTRONIC CO. LTD**

1 2 3 4 5 6 7 8