

This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for the manufacture or sale by anyone other than Amphenol Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.






Specifications:

Current Rating:1.0A AC/DC
 Voltage Rating:30V AC/DC
 Contact Resistance:20m ohm Max
 Insulation Resistance:1,000M ohm Min
 Withstanding Voltage:500V AC/Minute
 Operating Temperature Range:-40°C To +105°C
 Material and Finish:
 Insulator:PBT(UL94V-0),Black
 Contact:Copper Alloy
 Finish:Selective gold Or Tin Plated

Ordering Information








T806 XX X X 001 N EU

IDC Plug
 2.54mm pitch
 XX: No of positions:
 06 : 06 positions
 : :
 50 : 50 positions
 X: Plating options:
 0: Gold Flash
 1: 15u"/0.4um gold
 2: 30u"/0.8um gold
 S: Tin
 EU: ROHS Compliant
 001: size 7.3mm
 X: Housing color:
 0: Black
 1: Gray

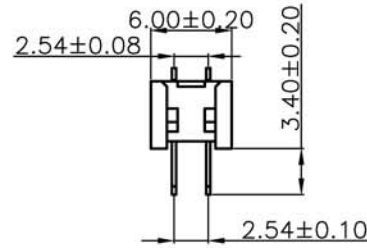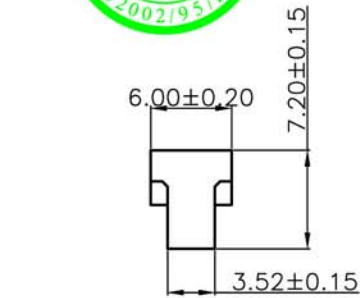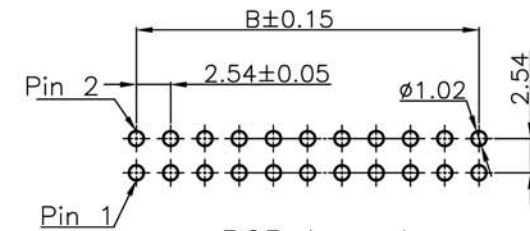

Dimensional:

Pos.	Dim. A	Pos.	Dim. A	Pos.	Dim. A
6	12.92	16	25.62	34	48.48
8	15.46	20	30.74	40	56.10
10	18.00	24	35.78	50	68.80
12	20.54	26	38.32		
14	23.08	30	43.40		

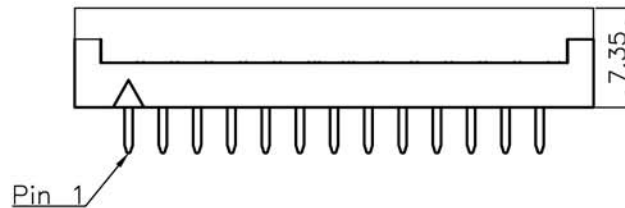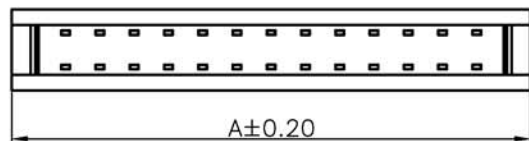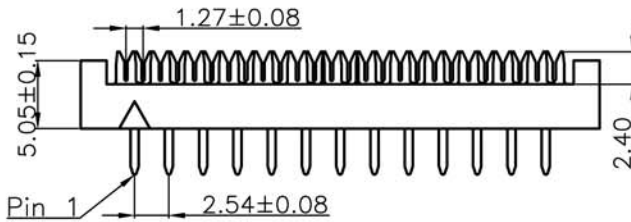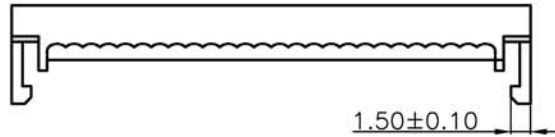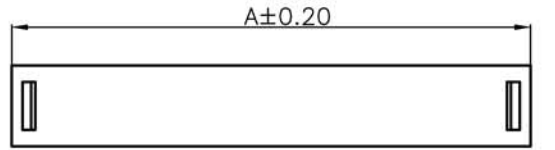

TOLERANCE (mm)	APPROVALS	DATE	TITLE	AMPHENOL Amphenol European Design Center	
X, ±0.3	DRAWN Stephane	18/Mar/2011	2.54 IDC Plug Dip Type	Scale N.A.	Sheet 1 of 1
X,X ±0.2	CHECKED Rob	18/Mar/2011			
X,XX ±0.15	APPROVED Rob	18/Mar/2011			
UNLESS OTHERWISE SPECIFIED	UNIT: mm	SIZE: A4	DRAWING N°	T806XXXX001NEU	
					REV. A