
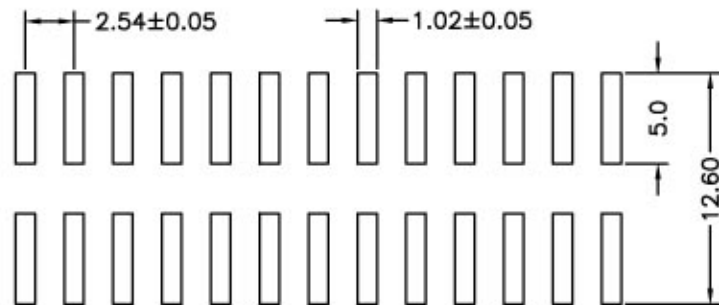
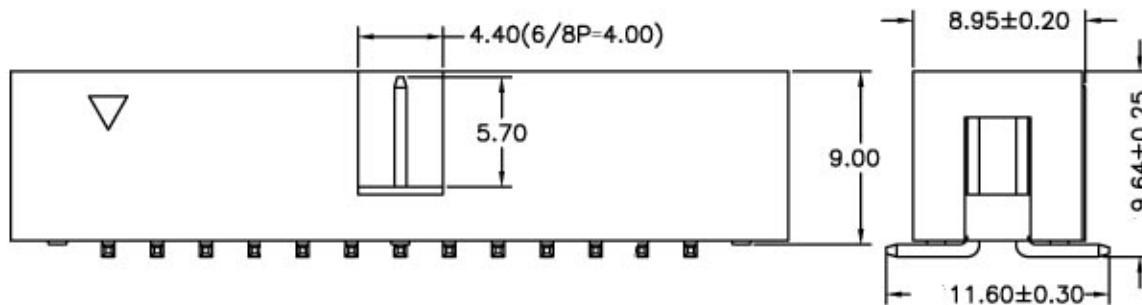



## SPECIFICATIONS

Current Rating: 3AMP  
 Contact Resistance: 20mΩ Max  
 Insulation Resistance: 1000MΩ Min  
 Withstand Voltage: 1000V AC/minute  
 Operation Temperature: -40°C to +105°C

Contact: Brass  
 plating: Au or Sn Over 50u" Ni  
 Insulator: High Temperature Thermoplastic  
 UL94V-0 Rated  
 Standard: PA6T+30%G. F

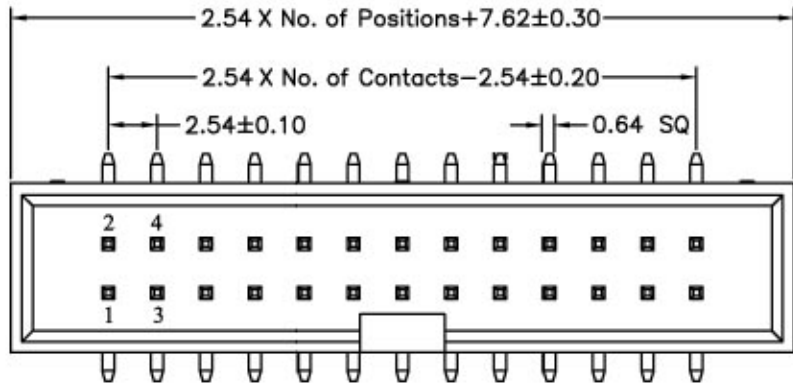

Recommended PCB Layout

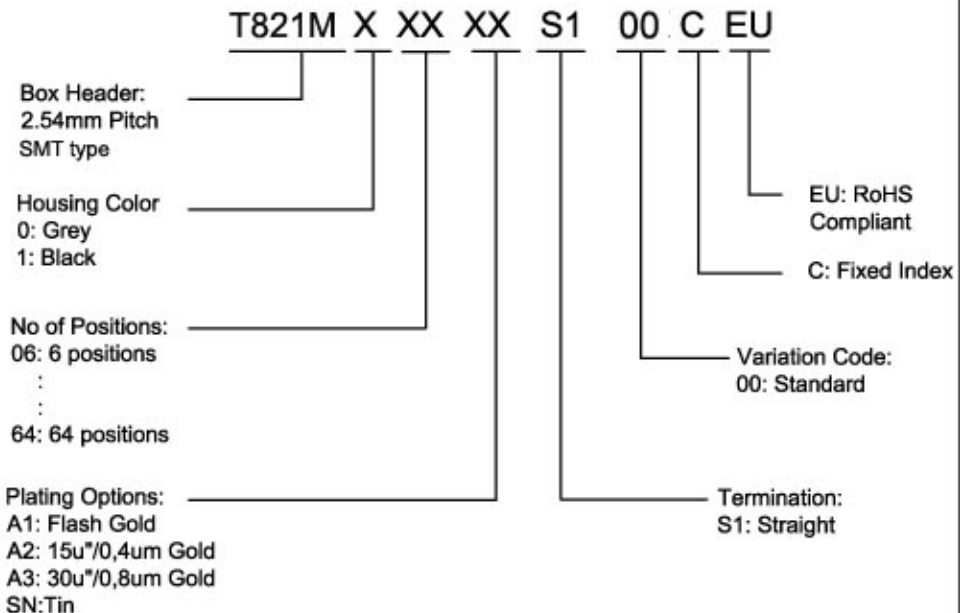

TOLERANCE (mm)	APPROVALS	DATE	TITLE	AMPHENOL Amphenol European Design Center	
X. ±0.3	DRAWN Roger	12/Jun/2006	Box header 2.54pitch, SMT	Scale N.A.	Sheet 1 of 1
XX ±0.2	CHECKED Rob K.	13/Jun/2006			
XXX ±0.15	APPROVED Rob K.	14/Jun/2006			
UNLESS OTHERWISE SPECIFIED	UNLESS OTHERWISE SPECIFIED	UNIT: mm	SIZE: A4	DRAWING N°	T821MXXXXXS100CEU
				REV. A	