

Pos	A	B	C	Pos	A	B	C
4	7.00	3.81	5.60	16	22.24	19.05	20.84
6	9.54	6.35	8.14	18	24.78	21.59	23.38
8	12.08	8.89	10.68	20	27.32	24.13	25.92
10	14.62	11.43	13.22	22	29.86	26.67	28.46
12	17.16	13.97	15.76	24	32.40	29.21	31.00
14	19.70	16.51	18.30	26	34.94	31.75	33.54


Specifications:

Current Rating: 1.5A AC/DC
 Voltage Rating: 230V AC/DC
 Contact Resistance: 20m Ohm. Max.
 Insulation Resistance: 1000M Ohm. Min.
 Withstanding Voltage: AC 500V AC/Minute
 Operating Temperature Range: -40°C ~ +105°C
 Material And Finish
 Insulator: High Temp. Plastic (Nylon 46 UL94V-0)
 Insulator Color: Red
 Contact Material: Phosphor Bronze
 Finish: Tin Plated
 Package: 800PCS/Reel

Ordering Information

TMM- X - X - XX - X

- | | |
|-----------------------|---|
| Type | Packaging |
| 1-IDC male | 1-Tape&reel w/o cap for TMM-(1-5) |
| 2-IDC plug | Tape&reel w/cap for TMM-6 |
| 3-DIP male straight | 2-Tube packing |
| 4-DIP female straight | 3-Tray packing |
| 5-DIP female R/A | 4-Tape&reel w/o cap for TMM-6 (only) |
| 6-SMT female straight | Number of positions |
| Locking system | 04,06,08,10,12,14,16,18,20,22,24 or 26. |
| 0-without lock | |
| L-with lock | |

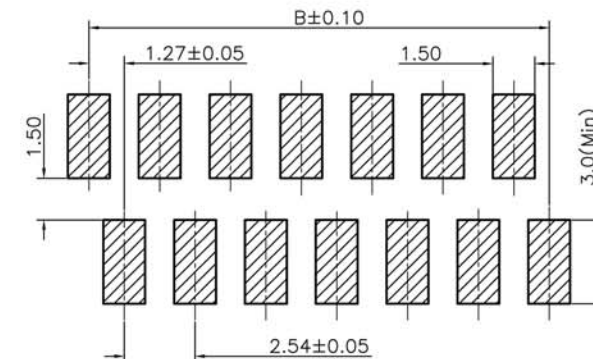

PCB Layout



TOLERANCE (mm)	APPROVALS	DATE	TITLE	AMPHENOL Amphenol European Design Center	
.X=±0.2 .XX=±0.15	DRAWN Stephane	2013/Jul/08	TMM Serie SMT Female straight	Scale N.A.	Sheet 1 of 1
	CHECKED Rob	2013/Jul/08		REV. G	
	APPROVED Rob	2013/Jul/08			
UNLESS OTHERWISE SPECIFIED	UNIT: mm	SIZE: A4	DRAWING N°	TMM-6-0-XX-X	