


1	2	3	4	5	6	7	8	9	10
SWITCH CIRCUIT			MATERIAL AND FINISH AS BELOW						
WHEN CARD IS EJECTED		WHEN CARD IS INSERTED	A	Housing	LCP UL94V-0 Black	E			
OPEN		CLOSE	B	Contact	Phosphor Bronze C5191, 0.15t, Contact Area:5u" Gold, Solder Area:Gold Flash	F			
			C	Switch	Phosphor Bronze C5191, 0.15t, Gold Flash	G			

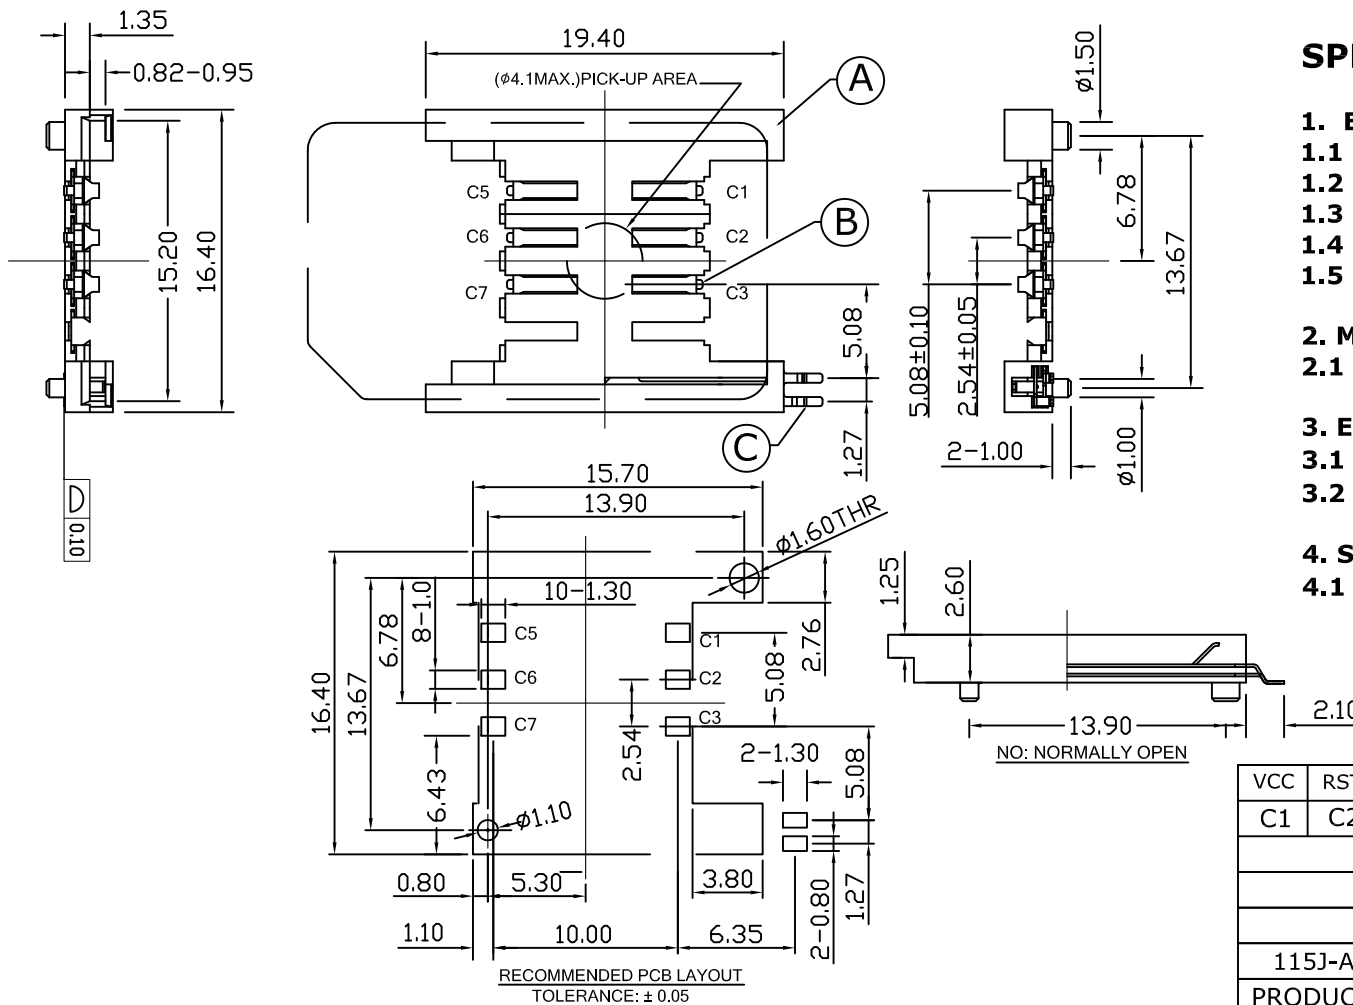

SPECIFICATION:

1. ELECTRICAL

- 1.1 Current Rating: 1.0A
- 1.2 Voltage Rating: 30V AC/DC
- 1.3 Contact Resistance: 50m Ω
- 1.4 Insulation Resistance: 1000M Ω
- 1.5 Dielectric Withstanding Voltage: 500VDC

2. MECHANICAL

- 2.1 Durability: 10000 Cycle

3. ENVIRONMENTAL

- 3.1 Operating temperature range: -40 $^{\circ}$ C ~ +85 $^{\circ}$ C
- 3.2 Storage temperature range: -40 $^{\circ}$ C ~ +85 $^{\circ}$ C

4. SOLDER ABILITY

- 4.1 Recommended IR Reflow Temperature: 260 $^{\circ}$ C

VCC	RST	CLK	N/A	GND	VPP	I/O	N/A				
C1	C2	C3	C4	C5	C6	C7	C8				

PIN ASSIGNMENT

115J-ACO0	SIM Card 6Pin Socket Normally Open Switch , Contact Area:5u" Gold
-----------	---

PRODUCT NO.	DESCRIPTION
-------------	-------------

UNLESS OTHERWISE SPECIFIED TOLERANCE

ANGLES	ANG.	$\pm 5^{\circ}$
LINEAR	0.	± 0.3
	0.0	± 0.25
	0.00	± 0.20

SCALE AS SHOWN UNIT: mm

DRAWN Willis 2013/09/24

CHECKED Angel 2013/09/24

APPROVED Ken 2013/09/24



www.attend.com.tw

DRAWN NAME:
SIM Card Socket with Card Detector Switch

PRODUCT NO. 115J-ACO0

FILE NAME 115J-ACO0_B_1

REV.	DESCRIPTION	DATE	REV.	DESCRIPTION	DATE	SIZE	REV.	FILE NAME
1			4			A4	1.0	115J-ACO0_B_1

- △ Revise:
- △ Revise:
- △ Revise: