




SWITCH CIRCUIT		MATERIAL AND FINISH AS BELOW							
WHEN CARD IS EJECTED	WHEN CARD IS INSERTED	A	Housing	LCP UL94V-0 Black	E				
CLOSE 	OPEN 	B	Contact	Phosphor Bronze C5191, 0.15t, Contact Area:5u" Gold, Solder Area:Gold Flash	F				
		C	Switch	Phosphor Bronze C5191, 0.15t, Gold Flash	G				

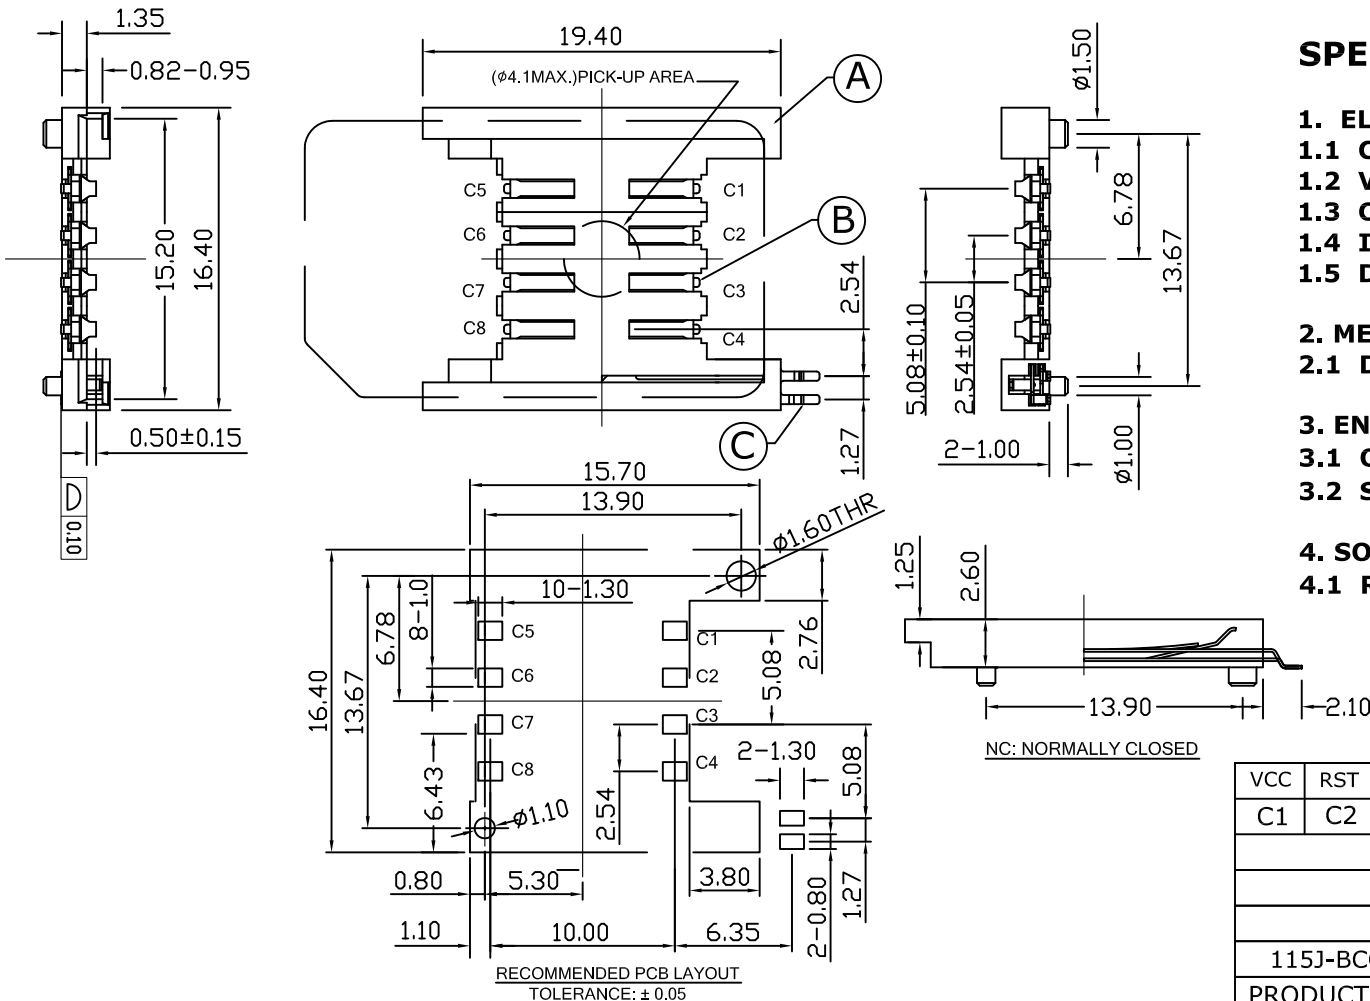

SPECIFICATION:

- 1. ELECTRICAL**
 - 1.1 Current Rating: 1.0A
 - 1.2 Voltage Rating: 30V AC/DC
 - 1.3 Contact Resistance: 50mΩ
 - 1.4 Insulation Resistance: 1000MΩ
 - 1.5 Dielectric Withstanding Voltage: 500VDC
- 2. MECHANICAL**
 - 2.1 Durability: 10000 Cycle
- 3. ENVIRONMENTAL**
 - 3.1 Operating temperature range: -40°C~+85°C
 - 3.2 Storage temperature range: -40°C~+85°C
- 4. SOLDER ABILITY**
 - 4.1 Recommended IR Reflow Temperature: 260°C

VCC	RST	CLK	N/A	GND	VPP	I/O	N/A				
C1	C2	C3	C4	C5	C6	C7	C8				

PIN ASSIGNMENT

115J-BCC0		SIM Card 8Pin Socket Normally Close Switch , Contact Area:5u" Gold									
PRODUCT NO.	DESCRIPTION										

UNLESS OTHERWISE SPECIFIED TOLERANCE		
ANGLES	ANG.	±5°
LINEAR	0.	±0.3
	0.0	±0.25
	0.00	±0.20
SCALE	AS SHOWN	UNIT: mm
DRAWN	Willis	2013/09/24
CHECKED	Angel	2013/09/24
APPROVED	Ken	2013/09/24



www.attend.com.tw

DRAWN NAME:
SIM Card Socket with Card Detector Switch

PRODUCT NO. 115J-BCC0

REV.	DESCRIPTION	DATE	REV.	DESCRIPTION	DATE	SIZE	REV.	FILE NAME
1			4			A4	1.0	115J-BCC0_B_1

- △ Revise:
- △ Revise:
- △ Revise: