


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	01/13/09	BAS
A		REDRAWN	8/15/13	

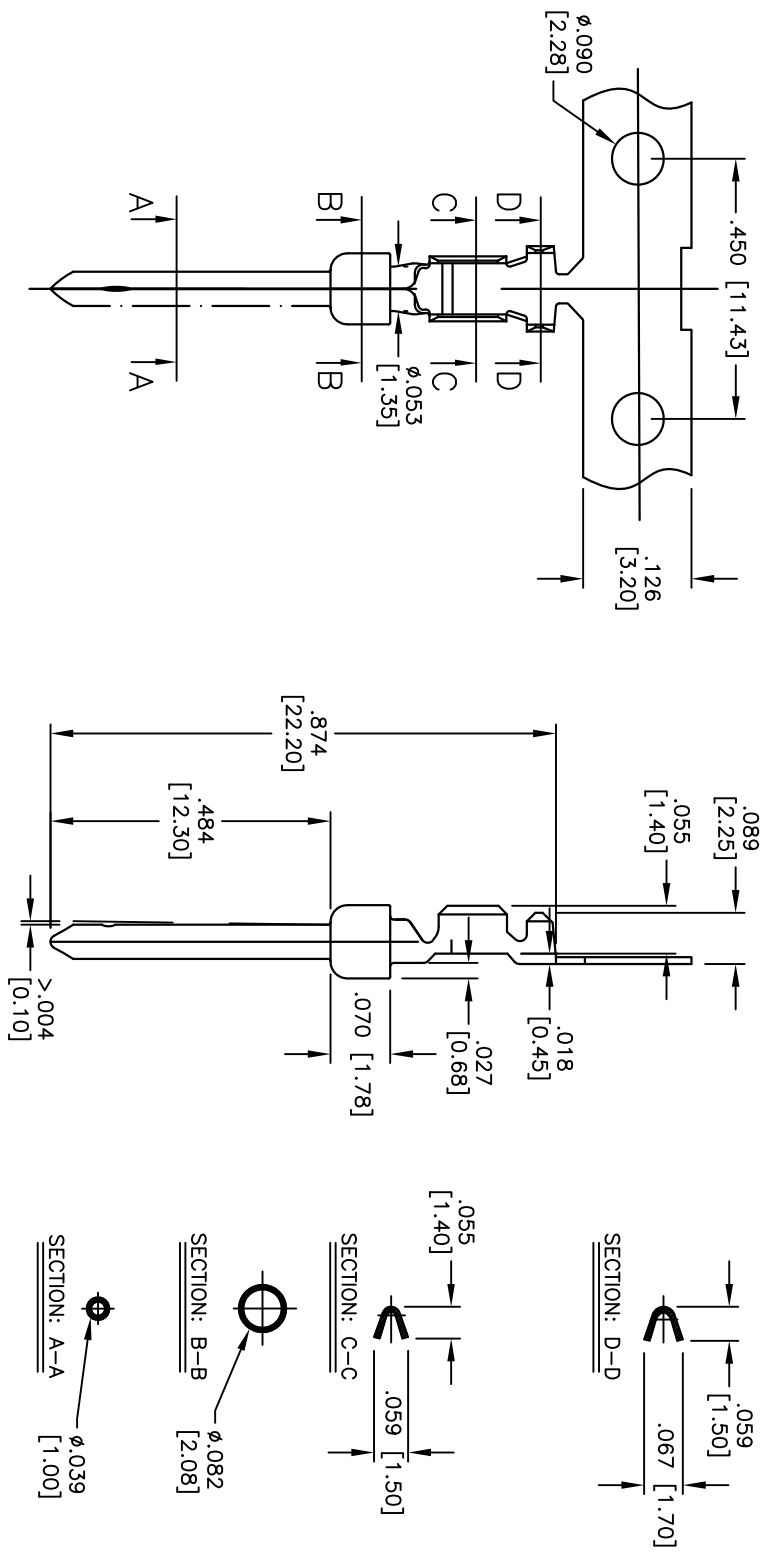

SPECIFICATIONS:

- Material: Phosphor Bronze
- Contact: Phosphor Bronze
- Plating: Gold flash over Nickel underplate overall
- Electrical:
 - Operating voltage: 250 VAC max
 - Current rating: 5 Amps max
 - Contact resistance: 20 mohms max initial
- Mechanical:
 - Recommended wire range: 20-24 AWG
- Packaging:
 - B = loose cut
 - R = tape and reel
- Environmental:
 - Lead free, RoHS compliant



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: D-SUB PLUG CONTACT, 20-24 AWG
 GOLD FLASH

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	± .10
.XX ± .020	± .015
.XXX ± .015	± .010
APPROVALS	DATE
DRAWN	SS
CHECKED	
APPROVED	

SIZE	PART NO.	REV.
X	DCP-02-X	A
REF:	S00087T	SCALE: NTS
SHEET 1 OF 1		