
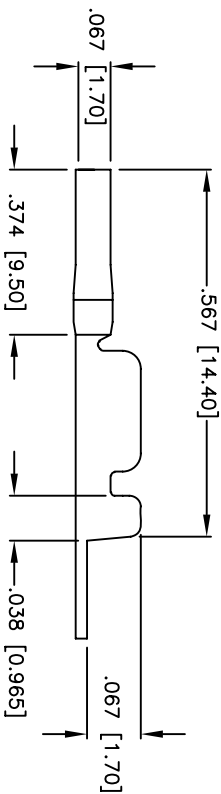


APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/14/04	
A		UPDATED DIMENSIONS	8/2/07	

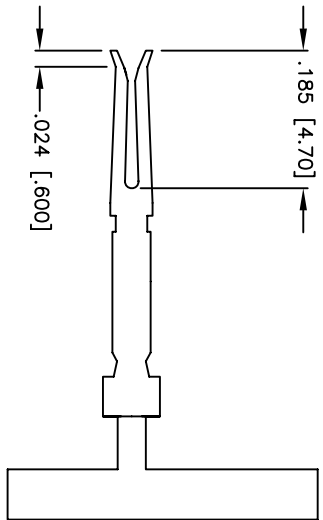

**SPECIFICATIONS:**

Contact: Phosphor Bronze  
 Plating: 5  $\mu$ in gold to MIL-G-45204, Type II, Grade C min on contact area over 50  $\mu$ in min nickel underplate to QQ-N-290, Class 2, Grade C, gold flash on crimp area.  
 Wire Range: 22 - 20 Awg.  
 Environmental: Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE MM [INCHES]  
 TOLERANCES: EXCEPT AS NOTED  
 INCHES

.X	$\pm$ .10	$\varnothing$ X	$\pm$ .10
.XX	$\pm$ .020	$\varnothing$ XXX	$\pm$ .015
.XXX	$\pm$ .015	$\varnothing$ XXX	$\pm$ .010
APPROVALS	DATE		

DRAWN	SS	4/14/04
CHECKED		
APPROVED		

**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: D-SUB, FEMALE CRIMP CONTACT  
 22 - 20 AWG WIRE

SIZE	PART NO.	SCALE	SHEET	REV.
X	DCS-02-R	NTS	1 OF 1	A