
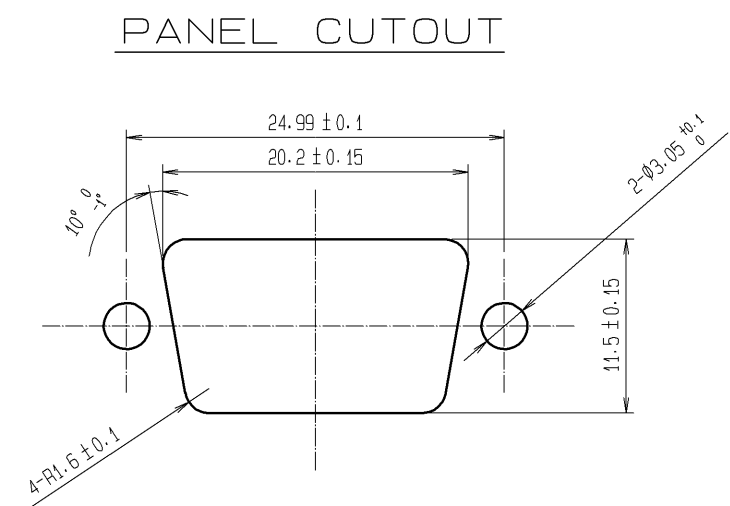


Mar.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

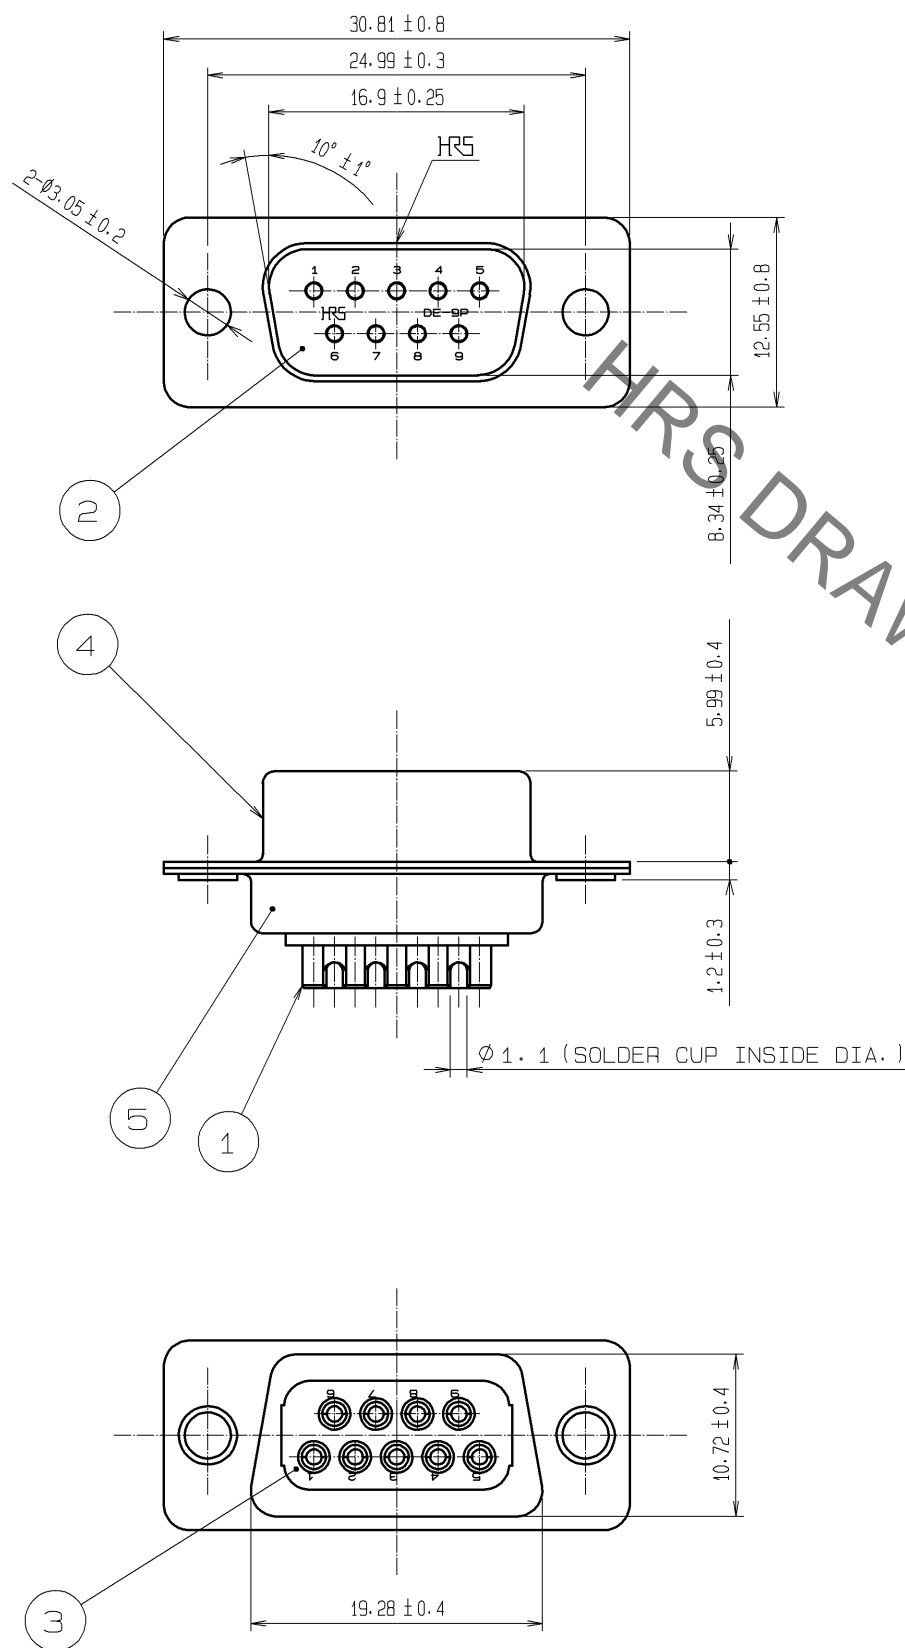

NOTE 1. SOLDERING SHALL BE DONE WITH SOLDERING BIT OF 40W MAX.

NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS
2	PBT	(BLACK)	UL94V-0	5	STEEL	OVER: Ni 1μm min	UNDER: Cu 5μm min
1	PHOSPHOR BRONZE	CONTACT: Au 0.2μm min	OTHER: Au 0.03μm min	4	STEEL	OVER: Ni 1μm min	UNDER: Cu 5μm min
		UNDER: Ni 2μm min		3	PBT	(BLACK)	UL94V-0

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	2 : 1	△				
APPROVED : SR. KIKUTA			07.11.20	DRAWING NO. EDC3-009501-02		
CHECKED : YH. ENAMI			07.11.20	PART NO. HDEB-9P(05)		
DESIGNED : MT. ITANO			07.11.20	CODE NO. CL211-0232-6-05		
DRAWN : MT. ITANO			07.11.20	△ 1/1		