
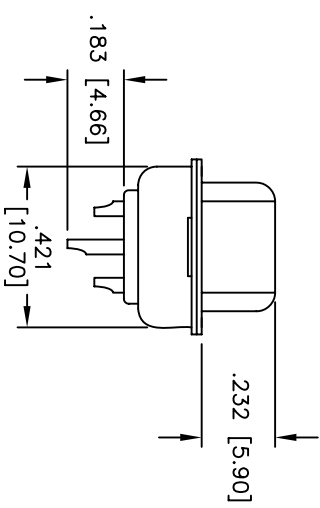
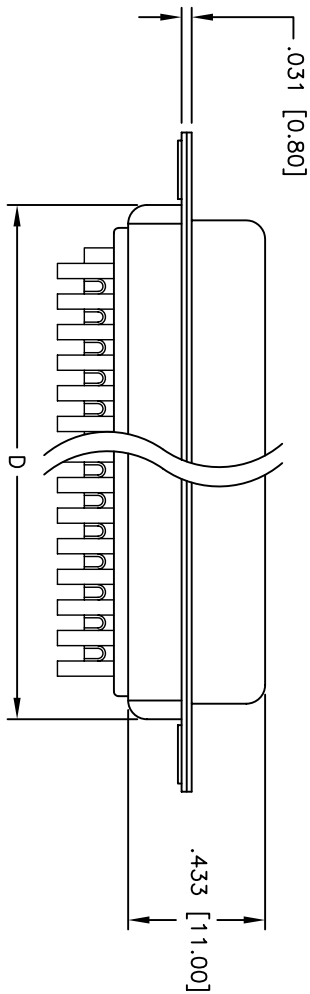


Rev	AWO #	Description	Date	Appr
-		RELEASED	5/5/05	

APPROVED: _____
 DATE: _____ TITLE: _____

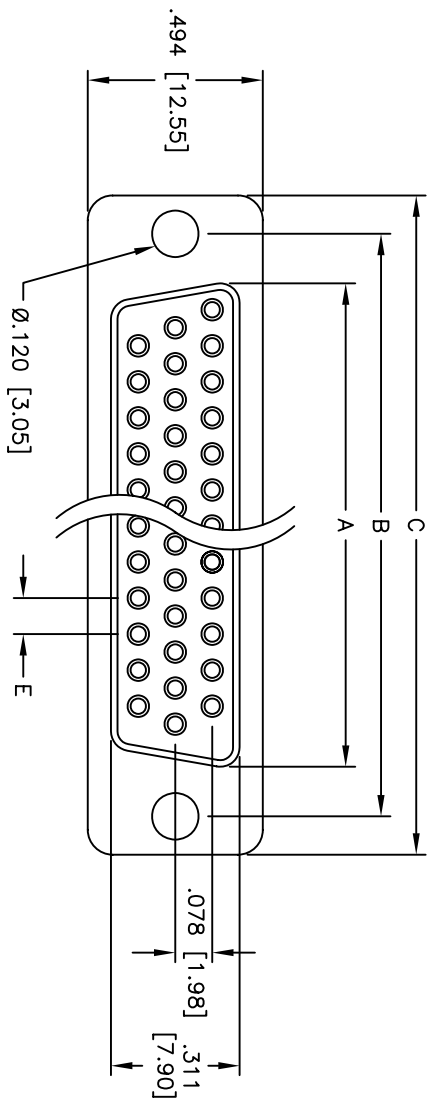

HDTXX	DIMENSIONS				
	A	B	C	D	E
26	.971 [24.66]	1.312 [33.32]	1.541 [39.14]	1.091 [27.70]	.090 [2.29]
44	1.511 [38.38]	1.852 [47.04]	2.088 [53.04]	1.618 [41.10]	.090 [2.29]
62	2.159 [54.84]	2.500 [63.50]	2.729 [69.32]	2.256 [57.30]	.095 [2.41]

SPECIFICATIONS:

Material: Insulator: PBT, glass reinforced, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Shell: Steel, Tin plated
 Plating: Gold flash over Nickel underplate overall
 Electrical: Operating voltage: 250 VAC max
 Current rating: 5 Amps max
 Contact resistance: 20 mohms max
 Insulation resistance: 5,000 Mohms min
 Dielectric withstanding voltage: 1,000 VAC for 1 minute
 Temperature Rating: Operating temperature: -65°C to +125°C
 Environmental: Lead free, RoHS compliant
 Recommended soldering temp: 235°C for 5 seconds

ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: HIGH DENSITY D-SUB SOCKET
 SOLDER CUP, .120 [3.05] MOUNTING HOLES

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]		TOLERANCES: EXCEPT AS NOTED	
INCHES		HOLES	
.X	±.10	ØXX	±.10
.XX	±.020	ØXXX	±.015
.XXX	±.015	ØXXX	±.010
APPROVALS		DATE	
DRAWN	SS	5/5/05	
CHECKED			
APPROVED			
SIZE	PART NO.	TITLE	
X	HDTXX-SD	HIGH DENSITY D-SUB SOCKET	
REF:	SCALE: NTS	SHEET 1 OF 1	

