




FRONT SHELL







INSERTED BODY



REAR SHELL



ASSEMBLED PLUG

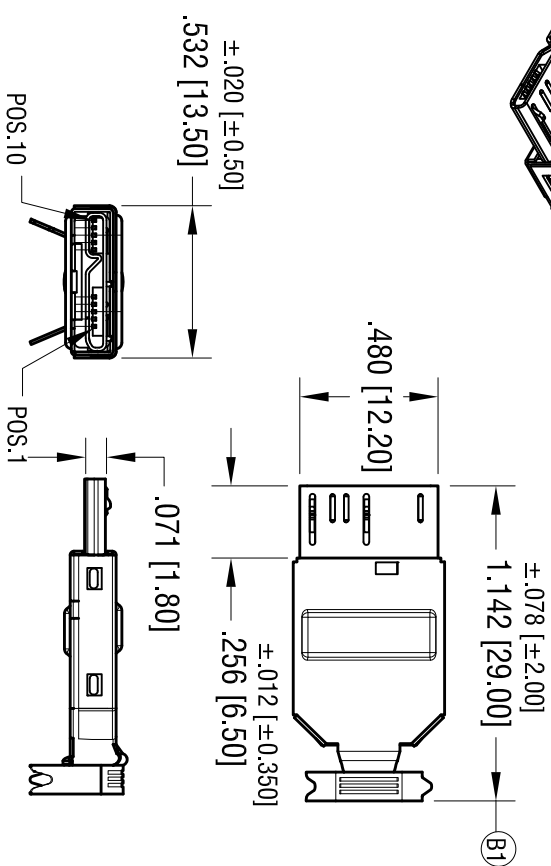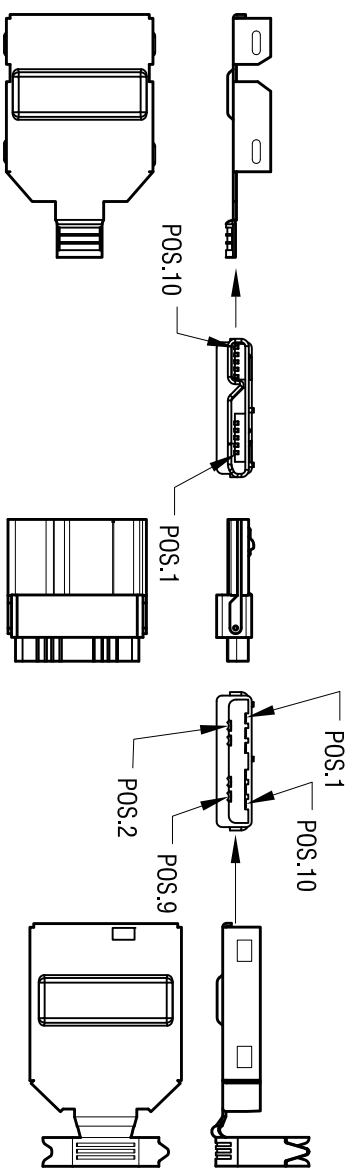

PLUG SPECIFICATIONS:

SHELL: MAT'L- STEEL

FINISH- NICKEL PLATE

CONTACT: MAT'L- PHOSPHOR BRONZE

FINISH- GOLD FLASH OVER NICKEL

INSULATION: MAT'L- THERMOPLASTIC, UL 94V-0

ELECTRICAL CHARACTERISTICS:

RATED VOLTAGE: 30V (RMS)

CONTACT CURRENT RATING: 1.8 Amp DC MAX.

CONTACT RESISTANCE: 50m Ω max.

DIELECTRIC WITHSTANDING VOLTAGE: AC 100 V.R.M.S.

MECHANICAL CHARACTERISTICS:

OPERATING TEMPERATURE: -13°F (-25°C) TO 176°F (+80°C)

DURABILITY: 1500 CYCLES MIN.

DATE	DESCRIPTION	REV.
6.01.11	CHANGE AS PER ECN 11-076	A
3.26.15	CHANGE AS PER ECN 15-040 B1 WAS 1.008 [25.60]	B

KEYSTONE ELECTRONICS CORP.
www.keystone.com • ASTORIA, N.Y. 11105-2017 • Tel (718) 956-8900

PART NAME
USB 3.0 MICRO PLUG

MATERIAL
 AS NOTED

FINISH
 AS NOTED

DRN BY	NT	DATE	8.11.10
APP'D	LN	SCALE	1.5X

THIS DOCUMENT IS THE PROPERTY OF
 KEYSTONE ELECTRONICS CORP. AND
 SHALL NOT BE REPRODUCED, DISTRIBUTED
 OR USED AS A BASIS FOR MANUFACTURE
 WITHOUT PRIOR WRITTEN PERMISSION
 FROM KEYSTONE ELECTRONICS CORP.

TOLERANCES	INCH	[MM]	CODE	DWG NO.
DECIMAL	± .010	[± 0.25]	C	957
ANGULAR	± 1°			