


Classia - One-way switch
 - Two-way switch
 - Four-way switch
 - Pushbutton
 - Pull-cord pushbutton


RW4001 - RA4001 - RG4001 --- RW4001M2 - RA4001M2 - RG4001M2
 RW4003 - RA4003 - RG4003 --- RW4003M2 - RA4003M2 - RG4003M2
 RW4004 - RA4004 - RG4004 --- RW4004M2 - RA4004M2 - RG4004M2
 RW4005 - RA4005 - RG4005 --- RW4005M2 - RA4005M2 - RG4005M2
 RW4033 - RA4033 - RG4033 --- RW4042M2 - RA4042M2 - RG4042M2

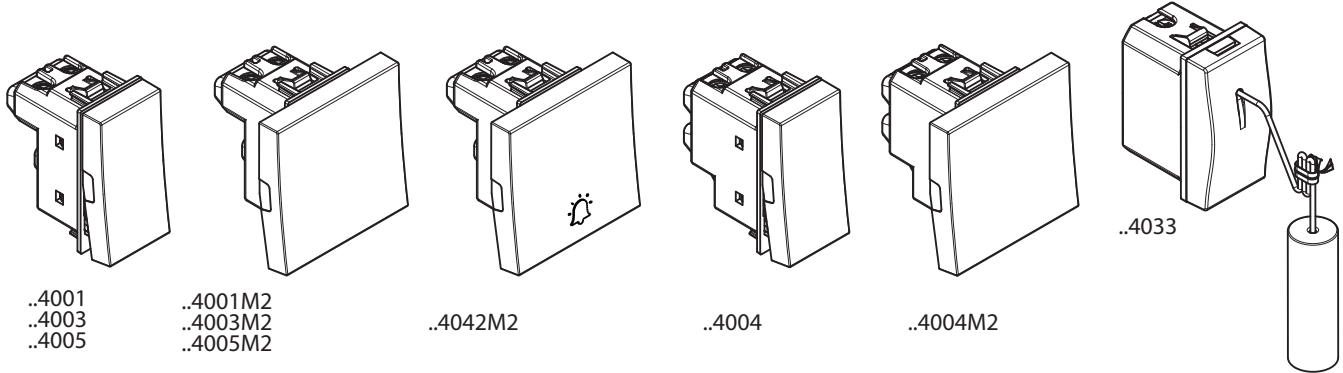

| Use | | |
|---|---|---|
| Rocker control device for lighting and other loads. | | |
| Range | | |
| Designation | Item 1 Module | Item 2 Modules |
| One-way switches 1P 10AX 250 Va.c. | <input type="checkbox"/> RW4001 <input type="checkbox"/> RA4001 <input type="checkbox"/> RG4001 | <input type="checkbox"/> RW4001M2 <input type="checkbox"/> RA4001M2 <input type="checkbox"/> RG4001M2 |
| Two-way switches 1P 10AX 250 Va.c. | <input type="checkbox"/> RW4003 <input type="checkbox"/> RA4003 <input type="checkbox"/> RG4003 | <input type="checkbox"/> RW4003M2 <input type="checkbox"/> RA4003M2 <input type="checkbox"/> RG4003M2 |
| Four-way switches Intermediate 10AX 250 Va.c. | <input type="checkbox"/> RW4004 <input type="checkbox"/> RA4004 <input type="checkbox"/> RG4004 | <input type="checkbox"/> RW4004M2 <input type="checkbox"/> RA4004M2 <input type="checkbox"/> RG4004M2 |
| Pushbuttons 1P (NO) 10A 250 Va.c. | <input type="checkbox"/> RW4005 <input type="checkbox"/> RA4005 <input type="checkbox"/> RG4005 | <input type="checkbox"/> RW4005M2 <input type="checkbox"/> RA4005M2 <input type="checkbox"/> RG4005M2 |
| Pushbuttons with cord-pull 1P (NO) 10A 250 Va.c. | <input type="checkbox"/> RW4033 <input type="checkbox"/> RA4033 <input type="checkbox"/> RG4033 | <input type="checkbox"/> RW4042M2 <input type="checkbox"/> RA4042M2 <input type="checkbox"/> RG4042M2 |

Color code: White colour Aluminum colour Black colour

Overall dimensions (mm)

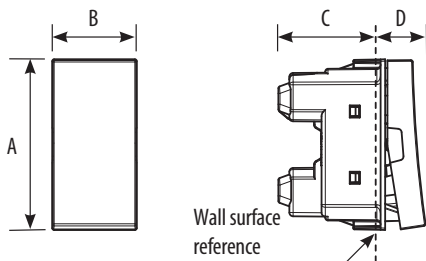

| Designation | A | B | C | D |
|-------------|------|------|------|------|
| ..4001 | | | | |
| ..4003 | | | | |
| ..4005 | | | | |
| ..4042 | | | | |
| 1 Module | 45.1 | 22.3 | 27 | 11.9 |
| 2 Modules | 45.1 | 44.7 | 27 | 11.9 |
| ..4004 | | | | |
| 1 Module | 45.1 | 22.3 | 28.1 | 11.9 |
| 2 Modules | 45.1 | 44.7 | 28.1 | 11.9 |
| ..4033 | | | | |
| 1 Module | 45.1 | 22.3 | 23.9 | 12.8 |

| Connection | |
|--|---------------------------|
| Terminal type: | screw clamp |
| Terminal capacity: | 2 x 4 mm ² max |
| Stripping length: | 9 mm |
| Compatible with flexible or rigid cables | |

Technical characteristics

- **Protection index**
(considering a complete installation, including cover plate)
Penetration by solid bodies/liquid: IP40
- **Mechanical characteristics**
Impact test: IK 04
- **Material characteristics**
Material:
Case: PC (Polycarbonate)
Key cover: ABS - ABS/PC
UV resistant.
Self-extinguishing:
850° C / 30 s for insulating parts holding live parts in place
650° C / 30 s for other parts made of insulating materials
- **Electrical characteristics**
Voltage: 250 V a.c.
Current: 10AX for ..4001../..4003../..4004..
Current: 10A for ..4005../..4042../..4033..
- **Climatic characteristics**
Storage temperature: - 10° C to + 70° C Use
temperature: - 5° C to + 35° C

Cleaning

Clean the surface with a cloth.
 Do not use acetone, tar-removing cleaning agents or trichloroethylene.
Caution: Always test before using special cleaning products.

Standards and approvals

Compliance with standards IEC/EN 60669-1.
 Refer to e.catalogue.