


Classia
Pushbutton lightable with nameplate

R4040



Use

Rocker control device for lighting and other loads, with nameplate.
 Back lightable by led: LN4742V230T
 LN4747V12T

Connection

Terminal type: screw clamp
 Terminal capacity: 2 x 2,5 mm² max
 Stripping length: 11 mm
 Compatible with flexible or rigid cables

Range

| Designation | Item |
|----------------------------------------------------|-------|
| Pushbutton with nameplate 1P (NO) 10A 250 Va.c. | R4040 |

Technical characteristics

- Protection index

(considering a complete installation, including cover plate)
 Penetration by solid bodies/liquid: IP40

- Mechanical characteristics

Impact test: IK 04

- Material characteristics

Material:
 Case: PC (Polycarbonate)
 Key cover: PC (Polycarbonate)

Halogen free.

UV resistant.

Self-extinguishing:

850° C / 30 s for insulating parts holding live parts in place
 650° C / 30 s for other parts made of insulating materials


- Electrical characteristics

Voltage: 250 V a.c.
 Current: 10A

- Climatic characteristics

Storage temperature: - 10° C to + 70° C
 Use temperature: - 5° C to + 35° C

Overall dimensions (mm)

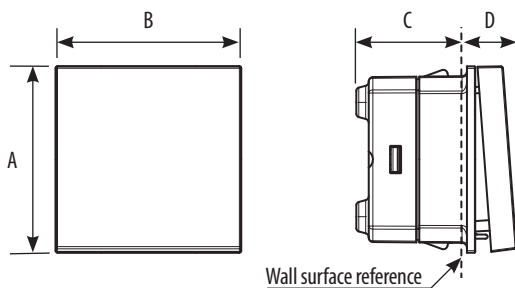

| | A | B | C | D |
|--------------|------|------|------|------|
| R4040 | 45.1 | 44.8 | 25.4 | 13.2 |

Cleaning

Clean the surface with a cloth.
 Do not use acetone, tar-removing cleaning agents or trichloroethylene.
Caution: Always test before using special cleaning products.

Standards and approvals

Compliance with standards IEC/EN 60669-1.
 Refer to e.catalogue.