

K4002

1. USE

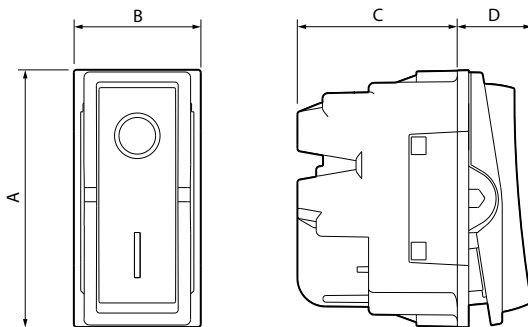
Switch range: basic control devices for lighting and other controls.

2. RANGE

Designation	Cat. Nos.	Related cover codes
1-way switch 2P - 16 AX-250Vac	<input type="checkbox"/> KW4002 <input type="checkbox"/> KM4002 <input type="checkbox"/> KG4002	<input type="checkbox"/> KW02 <input type="checkbox"/> KM02 <input type="checkbox"/> KG02

Colours code:

- White
- Sand
- Black

3. OVERALL DIMENSIONS (mm)


A	B	C	D
45	22	28	13

4. CONNECTION

Stripping length (rigid or flexible cables): 9 mm for screw terminals.

5. TECHNICAL CHARACTERISTICS
■ 5.1 Protection index

 Penetration by solid bodies/liquid: IP 21 D
 Impact test: IK 04

■ 5.2 Material characteristics

 Material: Polycarbonate for mechanism case
 PC for key cover
 Colour: White, Sand, Black.

 Halogen-free
 UV resistant

Self-extinguishing:

 + 850°C/30 s for insulating parts holding live parts in place.
 + 650°C/30 s for other parts made of insulating materials.

■ 5.3 Electrical characteristics

 Voltage: 250 VAC
 Current: 16 A

■ 5.4 Climatic characteristics

Storage and operating temperatures: -5° C to + 35° C.

6. CLEANING

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichloroethylene.

7. STANDARDS AND APPROVALS

 Compliance with standards of installation and manufacturing.
 Refer to e.catalogue.