


**Socket outlets**  
**Euro-American standard**



**Use**

Socket outlets for: Euro-American standard plugs.

**Range**

**Designation**

**Item**


Socket 2P 16A 127/250 V a.c. shielded holes

- RW4125
- RG4125

Color code:

- White colour
- Black colour

**Overall dimensions (mm)**

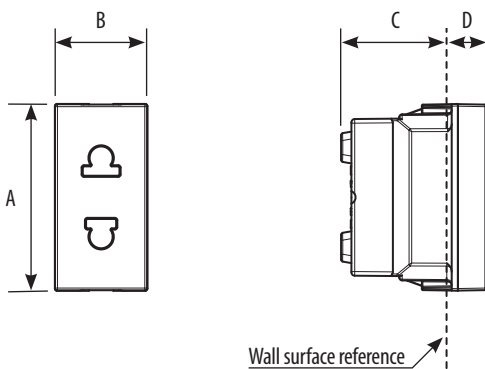

	A	B	C	D
..4125	45.1	22.3	25.4	9.8

**Connection**

- Terminal type: screw clamp
- Terminal capacity: 2 x 4 mm<sup>2</sup> max
- Stripping length: 11 mm
- Compatible with flexible or rigid cables

**Technical characteristics**

**- Protection index**

(considering a complete installation, including cover plate)  
Penetration by solid bodies/liquid: IP20D

**- Mechanical characteristics**

Impact test: IK 04

**- Material characteristics**

Material:  
Case and Key cover: PC (Polycarbonate)  
Halogen free.  
UV resistant.

**Self-extinguishing:**

- 850° C / 30 s for insulating parts holding live parts in place
- 650° C / 30 s for other parts made of insulating materials

**- Electrical characteristics**

Voltage: 127/250 VAC  
Current: 16 A

**- Climatic characteristics**

Storage temperature: - 10° C to + 70° C  
Use temperature: - 5° C to + 35° C

**Cleaning**

Clean the surface with a cloth.  
Do not use acetone, tar-removing cleaning agents or trichloroethylene.  
**Caution: Always test before using special cleaning products.**

**Standards and approvals**

Compliance with standards IEC 60884-1  
Refer to e.catalogue.