

**Use**

Shaver socket 2P, protected against overloads and direct short-circuits.  
Suitable for use with European et American 2-pin plugs.  
The mechanism is supplied with rocker plate, to be equipped with support frame and plate.

**Connection**

Terminal type: screw clamp  
Terminal capacity: 2 x 2,5 mm<sup>2</sup> max  
Stripping length: 11 mm  
Compatible with flexible or rigid cables

**Range**

Designation	Item
Shaver sockets	<input type="checkbox"/> RW4177 <input checked="" type="checkbox"/> RG4177

Color code:

White colour       Black colour

**Technical characteristics**

**- Protection index**  
(considering a complete installation, including cover plate)  
Penetration by solid bodies/liquid: IP21D

**- Mechanical characteristics**  
Impact test: IK 04

**- Material characteristics**  
Material:  
Case and Key cover: PC (Polycarbonate)

Halogen free.


UV resistant.

Self-extinguishing:  
850° C / 30 s for insulating parts holding live parts in place  
650° C / 30 s for other parts made of insulating materials

**- Electrical characteristics**  
Nominal input voltage: 230 Vac  
Nominal input frequency: 50 – 60 Hz  
Nominal output voltage: 115/230 Vac  
Maximum output current: 20 VA

**- Climatic characteristics**  
Storage temperature: - 10° C to + 70° C  
Use temperature: - 5° C to + 35° C

**Overall dimensions (mm)**

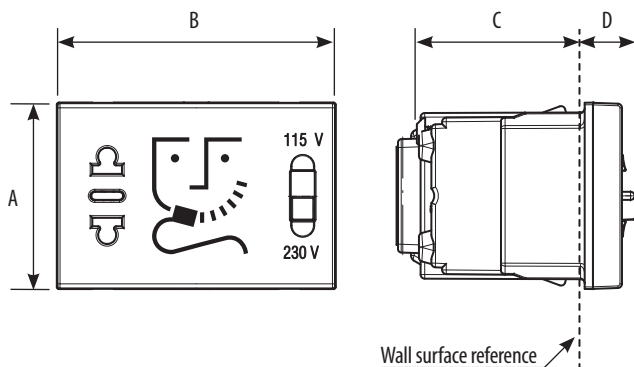

	A	B	C	D
..4177	45.1	67.3	44.1	13.8

**Cleaning**

Clean the surface with a cloth.  
Do not use acetone, tar-removing cleaning agents or trichloroethylene.  
**Caution: Always test before using special cleaning products.**

**Standards and approvals**

Compliance with standards IEC/EN 61558-2-5  
Refer to e.catalogue.