

Multifunction time relay TRAm 8-pin 230VAC




www.mikrobest.pl

Multifunction time relay. Multiscale. Multivoltage. 1 relay output DPDT

General characteristics

- Electronic time relay, multiscale
- 1 relay output with 2 changeover contact (DPDT)
- Green LED indicator for relay state
- Mounting 8-pin socket

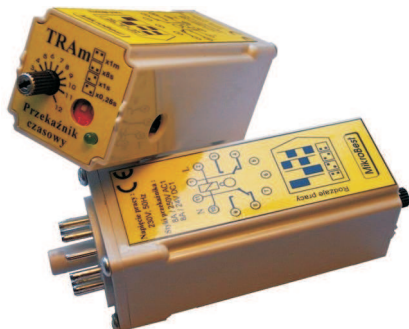

Order code	Time of scale range	Rated auxiliary supply voltage	Qty per pkg
TRAm 8-pin 230VAC	0,25s-12m	V 230 V AC	1

Function

On delay (Power on)

When the input voltage U is applied, timing delay t begins. Relay contacts R change state after time delay is complete. Contacts R return to their shelf state when input voltage U is removed.

Interval (Power off)


When the input voltage U is applied, relay contacts R change state immediately and timing cycle begins. When the time delay is complete, contacts return to shelf state. When input voltage U is removed, contacts will also return to their shelf state.

Repeat Cycle (Starting off)

When the input voltage U is applied, time delay t begins. When time delay t is complete, relay contacts R change state for time delay t. This cycle will repeat until input voltage U is removed.

Repeat Cycle (Starting on)

When the input voltage U is applied, relay contacts R change state immediately and time delay t begins. When the time delay t is complete, contacts return their shelf state for time delay t. This cycle will repeat until input voltage U is removed.




Napięcie pracy : 230V; 50Hz
 Styki przekaźnika :
 8A / 250V AC1
 8A / 24V DC1

Rodzaje pracy

MikroBest

Time rangers

- x1m
- x8s
- x1s
- x0,25s



Technical parameters

- Supply terminals: (pin: 2..7) 230VAC
- Supply voltage tolerance: 0,8 - 1,1 %
- Consumption: max 8VA
- Current rating: 8A/250V AC1
8A/24V DC1
- Time deviation: 5%
- Protection degree: IP20
- Dimensions: 105 x 35 x 35mm

