



MASTER PL-L 4 Pin



MASTER PL-L 55W/830/4P 1CT/25

Energy-saving compact fluorescent lamps. Compact long-arc low-pressure mercury discharge lamp. Envelope consists of 2 parallel fluorescent tubes

Warnings and Safety

- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position as well as applied control gear
- Shorter lamp life when often switching and not well pre-heated electrodes
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General information	
Cap-Base	2G11 [2G11]
Life to 50% Failures Preheat (Nom)	20000 h
System Description	High Frequency [High Frequency (HF)]
LSF Preheat 2000 h Rated	99 %
LSF Preheat 4000 h Rated	99 %
LSF Preheat 6000 h Rated	98 %
LSF Preheat 8000 h Rated	97 %
LSF Preheat 16000 h Rated	82 %
LSF Preheat 20000 h Rated	50 %
Flux measurement reference	Sphere
Light technical	
Colour Code	830 [CCT of 3000K]
Luminous Flux (Nom)	4700 lm
Luminous Flux (Rated) (Nom)	4800 lm
Colour Designation	Warm White (WW)

Chromaticity Coordinate X (Nom)	0.44
Chromaticity Coordinate Y (Nom)	0.403
Colour Temperature, horizontal (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	87 lm/W
Colour Rendering Index horiz (Nom)	82
Depreciation 2000 hrs	95 %
LLMF 4000 h Rated	94 %
Depreciation 5000 hrs	93 %
LLMF 8000 h Rated	92 %
LLMF 12000 h Rated	91 %
LLMF 16000 h Rated	90 %
LLMF 20000 h Rated	90 %


Operating and electrical	
Power (Rated) (Nom)	55.3 W
Lamp Current (Nom)	0.525 A

MASTER PL-L 4 Pin

Temperature	
Design Temperature (Nom)	30 °C
Controls and dimming	
Dimmable	Yes
Mechanical and housing	
Cap-Base Information	4P
Approval and application	
Energy Efficiency Class	G
Mercury (Hg) Content (Max)	2 mg
Mercury (Hg) Content (Nom)	2.0 mg
Energy Consumption kWh/1000 h	56 kWh
EPREL Registration Number	423313

Product data	
Full product code	871150061541140
Order product name	MASTER PL-L 55W/830/4P 1CT/25
EAN/UPC - Product	8711500615411
Order code	61541140
Numerator - Quantity Per Pack	1
Local code description	8344732
Numerator - Packs per outer box	25
Material Nr. (12NC)	927908708370
Net Weight (Piece)	134.000 g
ILCOS Code	FSDH-55/30/1B-L/P-2G11

Dimensional drawing




MASTER PL-L 55W/830/4P 1CT/25

Product	D (max)	D1 (max)	A (max)	B (max)	C (max)
MASTER PL-L 55W/830/4P 1CT/25	39.0 mm	18.0 mm	509.2 mm	535 mm	541.6 mm

Photometric data

...

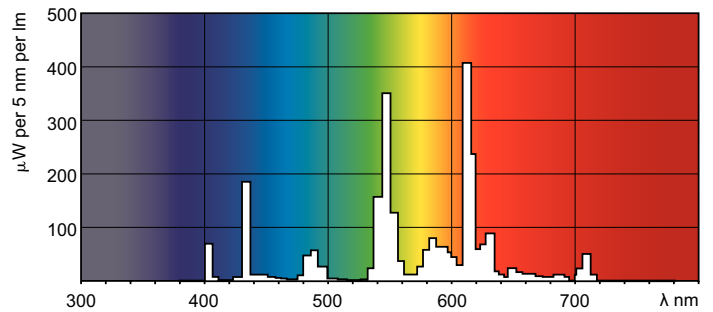

Lightcolour /830

Lightcolour /830

MASTER PL-L 4 Pin

