



# MASTER TL5 High Output



## MASTER TL5 HO 49W/830 1SL/40

Low-pressure mercury discharge lamps with a tubular 16 mm envelope

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data

General information	
Cap-Base	G5 [ G5]
Life to 50% Failures Preheat (Nom)	30000 h
Features	na [ Not Applicable]
System Description	High Output (HO)
LSF Preheat 2000 h Rated	99 %
LSF Preheat 4000 h Rated	99 %
LSF Preheat 6000 h Rated	99 %
LSF Preheat 8000 h Rated	99 %
LSF Preheat 16000 h Rated	97 %
LSF Preheat 20000 h Rated	84 %
Flux measurement reference	Sphere
Light technical	
Colour Code	830 [ CCT of 3000K]
Luminous Flux (Nom)	4375 lm
Luminous Flux (Rated) (Nom)	4375 lm
Colour Designation	Warm White (WW)
Luminous Efficacy (@ Max Lumen, Rated) (Nom)	99 lm/W

Chromaticity Coordinate X (Nom)	0.44
Chromaticity Coordinate Y (Nom)	0.403
Colour Temperature, horizontal (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	89 lm/W
Colour Rendering Index horiz (Max)	85
Colour Rendering Index horiz (Min)	80
Colour Rendering Index horiz (Nom)	82
Depreciation 2000 hrs	96 %
LLMF 4000 h Rated	95 %
Depreciation 5000 hrs	94 %
LLMF 8000 h Rated	93 %
LLMF 12000 h Rated	92 %
LLMF 16000 h Rated	91 %
LLMF 20000 h Rated	90 %


Operating and electrical	
Power (Rated) (Nom)	49.3 W
Lamp Current (Nom)	0.255 A

# MASTER TL5 High Output

Temperature	
Design Temperature (Nom)	35 °C
Controls and dimming	
Dimmable	Yes
Mechanical and housing	
Cap-Base Information	Green Plate
Bulb Shape	T5 [ 16 mm (T5)]
Approval and application	
Energy Efficiency Class	G
Mercury (Hg) Content (Nom)	1.2 mg
Energy Consumption kWh/1000 h	50 kWh
EPREL Registration Number	423546

Product data	
Full product code	871150063954755
Order product name	MASTER TL5 HO 49W/830 SLV/40
EAN/UPC - Product	8711500639547
Order code	63954755
Numerator - Quantity Per Pack	1
Local code description	3816713
Numerator - Packs per outer box	40
Material Nr. (12NC)	927927583055
Net Weight (Piece)	128.700 g
ILCOS Code	FDH-49/30/1B-L/P-G5-16/1450



## Dimensional drawing



Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL5 HO 49W/830 SLV/40	17 mm	1449.0 mm	1456.1 mm	1453.7 mm	1463.2 mm

## MASTER TL5 HO 49W/830 SLV/40

## Photometric data

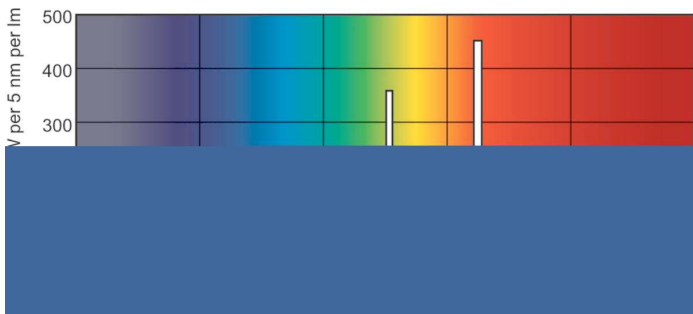
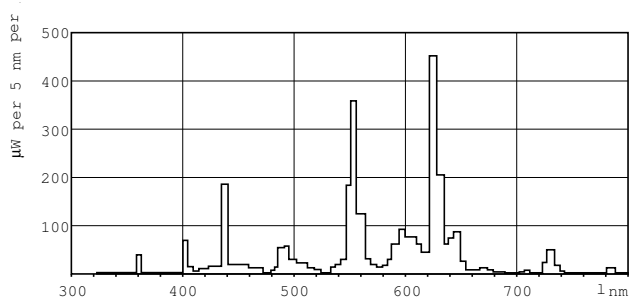


## Lightcolour /830

## Lightcolour /830


# MASTER TL5 High Output

## Lifetime

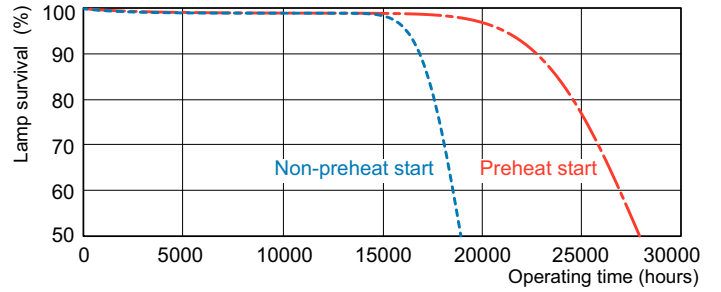

LDLE\_TL5-HO8\_0001-Life expectancy diagram

LDLE\_TL5-HO8\_0002-Life expectancy diagram

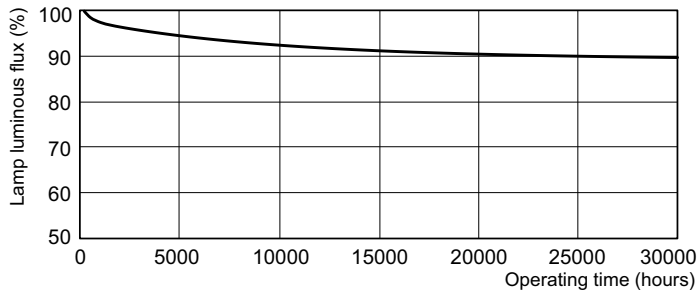

LDLM\_TL5-HO8\_0001-Lumen maintenance diagram

