



MASTER TL5 High Output



MASTER TL5 HO 54W/830 1SL/40

Low-pressure mercury discharge lamps with a tubular 16 mm envelope

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General information			
Cap-Base	G5 [G5]	Chromaticity Coordinate X (Nom)	0.44
Life to 50% Failures Preheat (Nom)	30000 h	Chromaticity Coordinate Y (Nom)	0.403
Features	na [Not Applicable]	Colour Temperature, horizontal (Nom)	3000 K
System Description	High Output (HO)	Luminous Efficacy (rated) (Nom)	83 lm/W
LSF Preheat 2000 h Rated	99 %	Colour Rendering Index horiz (Max)	85
LSF Preheat 4000 h Rated	99 %	Colour Rendering Index horiz (Min)	80
LSF Preheat 6000 h Rated	99 %	Colour Rendering Index horiz (Nom)	82
LSF Preheat 8000 h Rated	99 %	Depreciation 2000 hrs	96 %
LSF Preheat 16000 h Rated	97 %	LLMF 4000 h Rated	95 %
LSF Preheat 20000 h Rated	84 %	Depreciation 5000 hrs	94 %
Flux measurement reference	Sphere	LLMF 8000 h Rated	93 %
		LLMF 12000 h Rated	92 %
		LLMF 16000 h Rated	91 %
		LLMF 20000 h Rated	90 %
Light technical		Operating and electrical	
Colour Code	830 [CCT of 3000K]	Power (Rated) (Nom)	54.4 W
Luminous Flux (Nom)	4500 lm	Lamp Current (Nom)	0.455 A
Luminous Flux (Rated) (Nom)	4500 lm		
Colour Designation	Warm White (WW)		
Luminous Efficacy (@ Max Lumen, Rated) (Nom)	93 lm/W		

MASTER TL5 High Output

Temperature

Design Temperature (Nom)	35 °C
--------------------------	-------

Controls and dimming

Dimmable	Yes
----------	-----

Mechanical and housing

Cap-Base Information	Green Plate
Bulb Shape	T5 [16 mm (T5)]


Approval and application

Energy Efficiency Class	G
Mercury (Hg) Content (Nom)	1.2 mg
Energy Consumption kWh/1000 h	55 kWh
EPREL Registration Number	423562

Product data

Full product code	871150064316255
Order product name	MASTER TL5 HO 54W/830 SLV/40
EAN/UPC - Product	8711500643162
Order code	64316255
Numerator - Quantity Per Pack	1
Local code description	8343226
Numerator - Packs per outer box	40
Material Nr. (12NC)	927929083055
Net Weight (Piece)	105.800 g
ILCOS Code	FDH-54/30/1B-L/P-G5-16/1150



Dimensional drawing



Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL5 HO 54W/830 SLV/40	17 mm	1149.0 mm	1156.1 mm	1153.7 mm	1163.2 mm

MASTER TL5 HO 54W/830 SLV/40

Photometric data

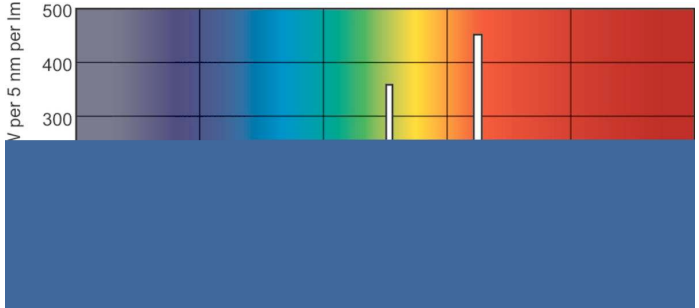
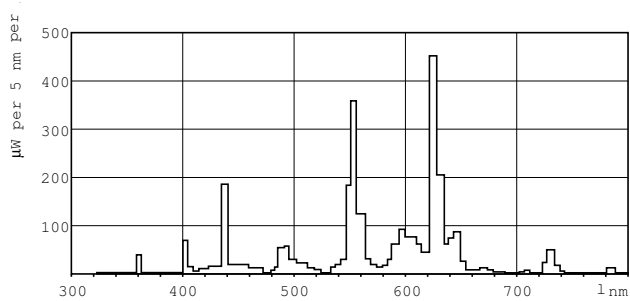


Lightcolour /830

Lightcolour /830

MASTER TL5 High Output

Lifetime

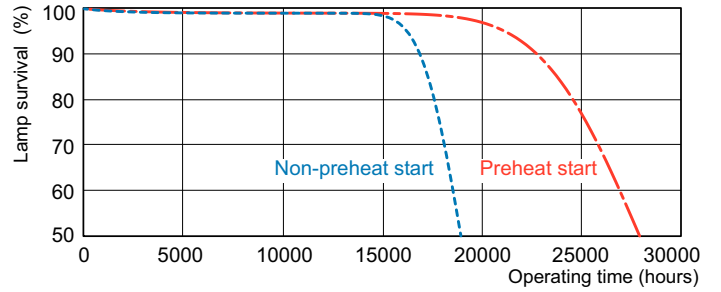

LDLE_TL5-HO8_0001-Life expectancy diagram

LDLE_TL5-HO8_0002-Life expectancy diagram



LDLM_TL5-HO8_0001-Lumen maintenance diagram

